


## Inductive slot sensor

### SJ10-E2

- 10 mm slot width
- 3-wire DC



## Dimensions

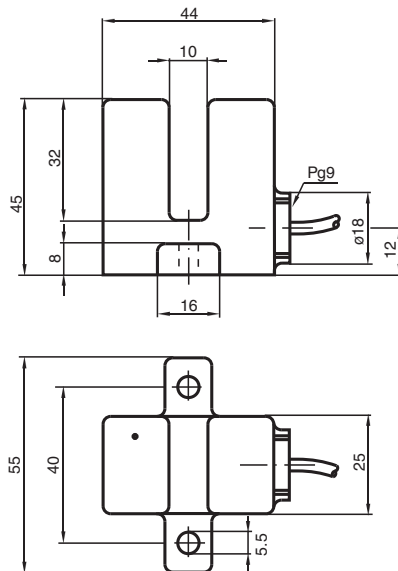

## Technical Data

### General specifications

Switching function	Normally open (NO)
Output type	PNP
Slot width	10 mm
Depth of immersion (lateral)	13.5 ... 16.5 mm
Output polarity	DC
Output type	3-wire

### Nominal ratings

Operating voltage	$U_B$	10 ... 30 V DC
Switching frequency	$f$	0 ... 1000 Hz
Hysteresis	$H$	typ. 5%
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	$U_d$	$\leq 3$ V

Release date: 2024-05-28 Date of issue: 2024-06-05 Filename: 015051\_eng.pdf

## Technical Data

Operating current	$I_L$	0 ... 200 mA
No-load supply current	$I_0$	≤ 15 mA
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards		EN IEC 60947-5-2
<b>Approvals and certificates</b>		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
<b>Ambient conditions</b>		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
<b>Mechanical specifications</b>		
Connection type		cable
Housing material		PBT
Degree of protection		IP67
Cable		
Wire end ferrules		yes
Cable diameter		6.4 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Material		PVC
Color		Gray
Number of cores		3
Core cross section		0.75 mm <sup>2</sup>
Length	L	2 m
Mass		220 g
Tightening torque, fastening screws		3 Nm
Dimensions		
Height		45 mm
Width		55 mm
Length		44 mm

## Connection

