



## Adapter K-device - S1000 termination board

### S1000-KFD Adapter

- Adapter for mounting a K-device to S1000 termination board
- Snap-on
- Additional cable sets depending on K-device



## Function

The S1000 system is not maintained any longer.

To be able to maintain existing installations the S1000-KFD adapter enables the mounting of an equivalent K-system module. A table with correspondent S1000 and K devices allows the correct selection of the Kdevice.

The adapter is an accessory to the Kdevice. It serves the mechanical mounting on the termination board.

### Warning!

The adapter S1000-KFD must only be used with an Ex-certified K module. Every single usage results in improper utilization and therefore endangers the intrinsic safety!

## Technical Data

### Supply

Rated voltage	$U_r$	20.4 ... 30 V DC
---------------	-------	------------------

### Electrical specifications

Connection	see Datasheet module
------------	----------------------

### Conformity

Degree of protection	IEC 60529
----------------------	-----------

### Ambient conditions

Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
---------------------	-------------------------------

### Mechanical specifications

Degree of protection	IP20
Connection	see Datasheet device
Mass	approx. 50 g
Dimensions	95 x 21 x 30 mm (3.7 x 0.8 x 1.2 inch)

### Data for application in connection with hazardous areas

EU-Type Examination Certificate	CESI 04 ATEX 142 X
---------------------------------	--------------------

Marking	⊕ II (1)G [EEx ia] IIC
---------	------------------------

### Supply

Maximum safe voltage	$U_m$	250 V AC / 375 V DC (Attention! $U_m$ is no rated voltage.)
----------------------	-------	---

### Directive conformity

Directive 2014/34/EU	EN 50014, EN 50020
----------------------	--------------------

### International approvals

#### IECEX approval

IECEX certificate	IECEX LCI 07.0013X
-------------------	--------------------

IECEX marking	[Ex ia] IIC , [Ex iaD]
---------------	------------------------

Standards	IEC 60079-0:2004 , IEC 60079-11:2006 , IEC 61241-0:2004 , IEC 61241-11:2005
-----------	---


### General information

### Technical Data

Supplementary information

Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

### Assembly

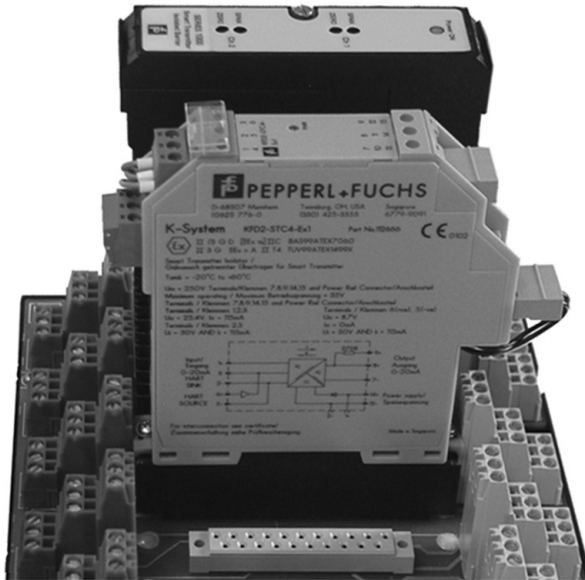

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 182380\_eng.pdf

**Application**

**Correspondent tables**

**Devices with analogue inputs**

S1000 type code	alternative KFD2 type code	Product code	Restrictions
1021/A/0/0242/AA	KFD2-STC1-Ex1	AI01	-
	KFD2-STC3-Ex1	AI02	Honeywell DE protocol not available
1021/A/0/0242/VV	KFD2-STV1-Ex1	AI03	-
	KFD2-STV3-Ex1	AI04	Honeywell DE protocol not available
1022/A/0/0242/AA	KFD2-STC4-Ex2	AI05	Honeywell DE protocol not available
1022/A/0/0242/VV	KFD2-STV4-Ex2-1	AI06	Honeywell DE protocol not available
1023/A/0/0242/AA	KFD2-CR-Ex1.30200	AI07	-
	KFD2-STC3-Ex1	AI08	max. V <sub>tx</sub> 16.5 V
1023/A/0/0242/VV	KFD2-STV3-Ex1	AI09	max. V <sub>tx</sub> 16.5 V
1025/A/0/0242/AA	KFD2-STC3-Ex1	AI10	-
	KFD2-STC4-Ex1	AI19	-
1025/A/0/0242/VV	KFD2-STV3-Ex1-1	AI11	-
	KFD2-STV4-Ex1-1	AI20	-
1026/A/0/0242/AA	KFD2-STC4-Ex2	AI12	-
1026/A/0/0242/VV	KFD2-STV4-Ex2-1	AI13	-
1029/A/0/0242/SA	KFD2-STC4-Ex1-Y112669	AI14	-
1029/A/0/0242/AA	KFD2-STC3-Ex1	AI15	-
	KFD2-STC4-Ex1	AI21	-
1029/A/0/0242/VV	KFD2-STV3-Ex1-1	AI16	-
	KFD2-STV4-Ex1-1	AI22	-
1030/A/0/0242/AA	KFD2-STC4-Ex2	AI17	-
1030/A/0/0242/VV	KFD2-STV4-Ex2-1	AI18	-

**Devices with analogue outputs**

S1000 type code	alternative KFD2 type code	Product code	Restrictions
1031/H/0/0242/AA	KFD2-CD-Ex1.32.0	AO01	-
1031/H/0/0202/DD			-
1031/H/0/0242/DD	KFD2-CD-Ex1.32.1	AO02	-
1031/H/0/0202/AA	KFD2-CD-Ex1.32.2	AO03	-
1031/V/0/0315/AA	KFD2-CD-Ex1.32.3	AO04	-
1032/H/0/0242/AA	KFD2-CD2-Ex2	AO05	-
	KFD2-SCD2-Ex2.LK		minimum load 100 Ω , line fault detection active
1033/H/0/0242/AA	KFD0-CS-Ex1.50P	AO06	-
1034/H/0/0242/AA	KFD0-CS-Ex2.50P	AO07	-
1035/H/0/0250/FD	KFD0-CS-Ex1.51P	AO08	-
1036/H/0/0250/FD	KFD0-CS-Ex2.51P	AO09	-
1037/A/0/0242/AA	KFD2-SCD-Ex1.LK	AO10	-
1038/A/0/0242/AA	KFD2-SCD2-Ex2.LK	AO11	-
1039H/0/0204/FD	KFD0-CS-Ex1.51P	AO12	-
1039H/0/0242/FD			-
1040H/0/0204/FD	KFD0-CS-Ex2.51P	AO13	-
1040H/0/0242/FD			-

**Devices with digital inputs**

S1000 type code	alternative KFD2 type code	Product code	Restrictions
1821/x/0/xxxx/BB	KFD2-SR2-Ex1.W.LB	DI01	to be used only for SELV signal
1821/x/0/xxxx/CC		DI02	to be used for NON-SELV signal (mains voltage)
1822/x/0/xxxx/BB	KFD2-SR2-Ex2.W	DI03	to be used only for SELV signal, inputs not insulated
1822/x/0/xxxx/CC		DI04	to be used for NON-SELV signal (mains voltage), inputs not insulated
1841/x/0/xxxx/LL	KFD2-SOT-Ex1.LB.IO	DI05	-
1841/x/0/xxxx/HH		DI06	-
1842/x/0/xxxx/LL	KFD2-SOT2-Ex2.IO	DI07	-
1842/x/0/xxxx/HH		DI08	-

**Devices with digital outputs**

S1000 type code	alternative KFD2 type code	Product code	Restrictions
-----------------	----------------------------	--------------	--------------

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 182380\_eng.pdf

1861/U/0/0070/xx	KFD0-RO-Ex2	DO01	U <sub>m</sub> max. 40 V
1862/U/0/0070/xx			
1871/L/0/0060/UU	KFD2-SL-Ex1.48.90A	DO03	-
1871/L/0/0050/WW			
1871/U/0/0070/UU	KFD2-SD Ex1.48.90A	DO04	-
1871/U/0/0070/UU			
1872/L/0/0050/WW	KFD2-SL2-Ex2	DO05	-
1872/L/0/0060/UU			
1881/U/0/0070/UU	KFD2-SD-Ex1.36	DO06	-
1872/C/0/0040/UU	KFD2-SL2-Ex2	DO07	-
1872/C/0/0030/WW			-

**Devices with low level inputs**

S1000 type code	alternative KFD2 type code	Product code	Restrictions
1011/H/0/0202/AA	KFD2-CR-Ex1.20300	LI01	On 1061 output is NON linearized. On UT output is linearized.
1011/H/0/0242/AA	KFD2-STC4-Ex1	LI12	-
1011/H/0/0202/VV	KFD2-STV4-Ex1-1	LI13	-
1011/H/0/0242/VV			
1061/x/x/xxxx/AA	KFD2-UT-Ex1	LI02	On 1061 output is NON linearized. On UT output is linearized.
1061/x/x/xxxx/VV	KFD2-UT-Ex1-1	LI03	-
1071/x/x/xxxx/AA	KFD2-UT-Ex1	LI04	-
1071/x/x/xxxx/VV	KFD2-UT-Ex1-1	LI05	-
1065/M/1/0880/MV	KFD2-VR-Ex1.50m	LI06	Check for the proper input range.
	KFD2-VR-Ex1.500m	LI07	-
1065/M/2/0880/MV	KFD2-VR-Ex1.50m.L	LI08	-
1065/M/3/0880/MV	KFD2-VR-Ex1.50m.R	LI09	-
1062/x/x/xxxx/xx	KFD2-UT2-Ex2	LI10	On 1062 output is NON linearized. On UT2 output is linearized.
1072/D/x/xxxx/xx	KFD2-UT2-Ex2	LI11	-
1072/F/x/xxxx/xx			

**Devices with trip values**

S1000 type code	alternative KFD2 type code	Product code	Restrictions
1310/H/x/xxxx/xx	KFD2-GU-Ex1	TA01	U <sub>m</sub> max. 40 V, to be used for NON-SELV signal (mains voltage)
1311/H/x/xxxx/xx		TA02	U <sub>m</sub> max. 40 V, to be used for SELV signal
1310/V/x/xxxx/xx	KFD2-GU-Ex1	TA03	U <sub>m</sub> max. 40 V, to be used for NON-SELV signal (mains voltage)
1311/V/x/xxxx/xx		TA04	U <sub>m</sub> max. 40 V, to be used for SELV signal
1360/x/x/xxxx/xx	KFD2-GU-Ex1	TA05	U <sub>m</sub> max. 40 V, to be used for NON-SELV signal (mains voltage)
1361/x/x/xxxx/xx		TA06	U <sub>m</sub> max. 40 V, to be used for SELV signal
1370/x/x/xxxx/xx	KFD2-GU-Ex1	TA07	U <sub>m</sub> max. 40 V, to be used for NON-SELV signal (mains voltage)
1371/x/x/xxxx/xx		TA08	U <sub>m</sub> max. 40 V, to be used for SELV signal

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 182380\_eng.pdf