



## Place Holder Barrier KFD0-LGH-Y34868


- K-System place holder module
- Housing width 20 mm
- Marshalling for field and control side circuits
- No electrical function: empty housing

Place holder barrier for KF modules

### Function

The device is an empty housing that fills unused space on the DIN mounting rail or Power Rail.

### Connection

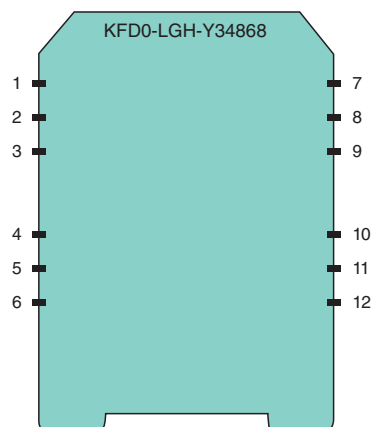

### Technical Data

Electrical specifications		
Rated voltage	$U_r$	$\leq 50 \text{ V}$
Rated current	$I_r$	$\leq 2 \text{ A}$
Indicators/settings		
Labeling		space for labeling at the front
Conformity		
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		$-20 \dots 60 \text{ }^\circ\text{C}$ ( $-4 \dots 140 \text{ }^\circ\text{F}$ )
Mechanical specifications		
Degree of protection		IP20
Connection		without terminals
Mass		approx. 100 g
Dimensions		20 x 93 x 115 mm (0.8 x 3.7 x 4.5 inch) (W x H x D) , housing type B1

Release date: 2023-05-02 Date of issue: 2023-05-02 Filename: 034868\_eng.pdf

## Technical Data

Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

## Assembly

### Front view

