


Inductive sensor


NBB2-V3-US



- Sensing range 2 mm
- 2-wire AC/DC

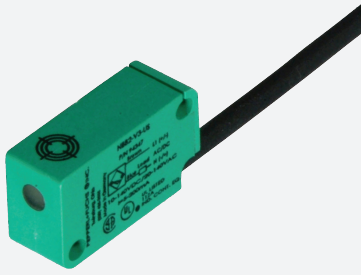

Dimensions



Technical Data

General specifications

Switching function		Normally open (NO)
Output type		Two-wire
Rated operating distance	s_n	2 mm
Installation		flush mountable
Output polarity		AC/DC
Reduction factor r_{AI}		0.5

Release date: 2025-04-02 Date of issue: 2025-04-02 Filename: 094347_eng.pdf

Technical Data

Reduction factor r_{Cu}		0.46
Reduction factor r_{304}		0.9
Reduction factor r_{St37}		1
Reduction factor r_{Brass}		0.8
Nominal ratings		
Operating voltage DC	U_B	10 ... 140 V
Operating voltage AC	U_B	20 ... 140 V
Switching frequency	f	25 Hz
Reverse polarity protection		no
Short-circuit protection		no
Voltage drop	U_d	≤ 7 V
Operating current	I_L	5 ... 200 mA max
Off-state current	I_r	≤ 0.8 mA
Switching state indicator		LED, red
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cable
Housing material		PBT
Sensing face		PBT
Degree of protection		IP67
Cable		
Material		PUR
Color		black
Number of cores		2
Core cross section		0.25 mm ²
Length	L	2 m
Dimensions		
Height		10 mm
Width		16 mm
Length		28 mm

Connection

