



## Thru-beam sensor (pair) OBE12M-R100-S2EP1-IO



- Miniature design with versatile mounting options
- IO-Link interface for service and process data
- Various frequencies for avoiding mutual interference (cross-talk immunity)
- Extended temperature range  
-40 °C ... 60 °C
- High degree of protection IP69K



### Function


The R100 series miniature optical sensors are the first devices of their kind to offer an end-to-end solution in a small single standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

**Dimensions**

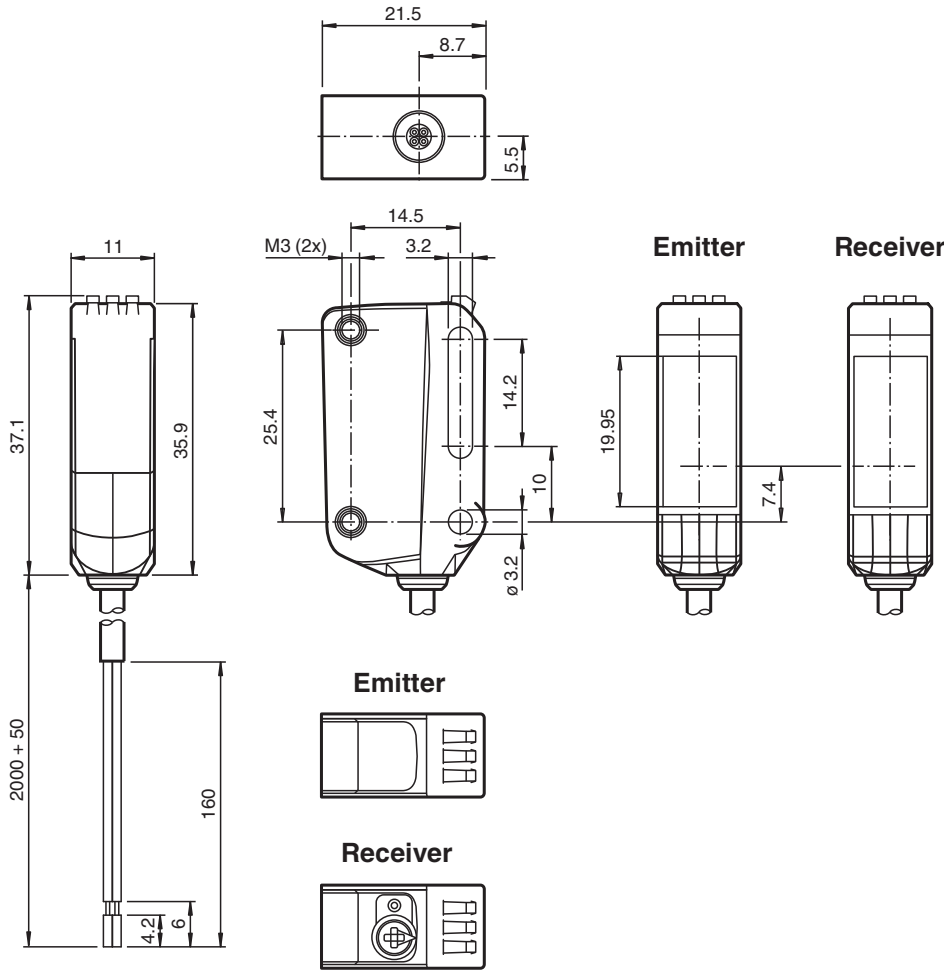

**Technical Data**

|   |   |
|---|---|
| <b>System components</b>                    |   |
| Emitter                                     | OBE12M-R100-S-IO  |
| Receiver                                    | OBE12M-R100-2EP1-IO   |
| <b>General specifications</b>               |   |
| Effective detection range                   | 0 ... 12 m  |
| Threshold detection range                   | 15 m  |
| Light source                                | LED   |
| Light type                                  | modulated visible red light   |
| LED risk group labelling                    | exempt group  |
| Diameter of the light spot                  | approx. 65 mm at a distance of 1 m  |
| Opening angle                               | 3.7 °   |
| Ambient light limit                         | EN 60947-5-2 : 30000 Lux  |
| <b>Functional safety related parameters</b> |   |
| MTTF <sub>d</sub>                           | 462 a   |
| Mission Time (T <sub>M</sub> )              | 20 a  |
| Diagnostic Coverage (DC)                    | 0 %   |
| <b>Indicators/operating means</b>           |   |
| Operation indicator                         | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode |

Release date: 2025-01-30 Date of issue: 2025-01-30 Filename: 308440\_eng.pdf



## Technical Data

|                                   |       |   |
|-----------------------------------|-------|---|
| Function indicator                |       | Yellow LED:<br>Permanently lit - light path clear<br>Permanently off - object detected<br>Flashing (4 Hz) - insufficient operating reserve  |
| Control elements                  |       | Receiver: light/dark switch   |
| Control elements                  |       | Receiver: sensitivity adjustment  |
| Parameterization indicator        |       | IO link communication: green LED goes out briefly (1 Hz)  |
| <b>Electrical specifications</b>  |       |   |
| Operating voltage                 | $U_B$ | 10 ... 30 V DC  |
| Ripple                            |       | max. 10 %   |
| No-load supply current            | $I_0$ | Emitter: $\leq 14$ mA<br>Receiver: $\leq 13$ mA at 24 V supply voltage  |
| Protection class                  |       | III   |
| <b>Interface</b>                  |       |   |
| Interface type                    |       | IO-Link ( via C/Q = pin 4 )   |
| IO-Link revision                  |       | 1.1   |
| Device ID                         |       | Emitter: 0x110401 (1115137)<br>Receiver: 0x11030A (1114890)   |
| Transfer rate                     |       | COM2 (38.4 kBit/s)  |
| Min. cycle time                   |       | 2.3 ms  |
| Process data width                |       | Emitter:<br>Process data output: 2 Bit<br>Receiver:<br>Process data input: 2 Bit<br>Process data output: 2 Bit  |
| SIO mode support                  |       | yes   |
| Compatible master port type       |       | A   |
| <b>Input</b>                      |       |   |
| Test input                        |       | emitter deactivation at $+U_B$  |
| <b>Output</b>                     |       |   |
| Switching type                    |       | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - BK: NPN normally closed / light-on, PNP normally open / dark-on, IO-Link<br>/Q - WH: NPN normally open / dark-on, PNP normally closed / light-on |
| Signal output                     |       | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected  |
| Switching voltage                 |       | max. 30 V DC  |
| Switching current                 |       | max. 100 mA , resistive load  |
| Usage category                    |       | DC-12 and DC-13   |
| Voltage drop                      | $U_d$ | $\leq 1.5$ V DC   |
| Switching frequency               | $f$   | 1000 Hz   |
| Response time                     |       | 0.5 ms  |
| <b>Conformity</b>                 |       |   |
| Communication interface           |       | IEC 61131-9   |
| Product standard                  |       | EN 60947-5-2  |
| <b>Approvals and certificates</b> |       |   |
| UL approval                       |       | E87056 , cULus Listed , class 2 power supply , type rating 1  |
| <b>Ambient conditions</b>         |       |   |
| Ambient temperature               |       | -40 ... 60 °C (-40 ... 140 °F) , cable, fixed installation<br>-25 ... 60 °C (-13 ... 140 °F) , movable cable not appropriate for conveyor chains  |
| Storage temperature               |       | -40 ... 70 °C (-40 ... 158 °F)  |
| <b>Mechanical specifications</b>  |       |   |
| Degree of protection              |       | IP67 / IP69 / IP69K   |
| Connection                        |       | 2 m fixed cable   |
| Material                          |       |   |
| Housing                           |       | PC (Polycarbonate)  |
| Optical face                      |       | PMMA  |
| Mass                              |       | Emitter: approx. 10 g receiver: approx. 10 g  |
| Dimensions                        |       |   |

### Technical Data


|              |         |
|--------------|---------|
| Height       | 37.1 mm |
| Width        | 11 mm   |
| Depth        | 21.5 mm |
| Cable length | 2 m     |

### Connection




### Assembly

**Emitter**




|   |                     |
|---|---------------------|
| 1 | Operating indicator |
|---|---------------------|

**Receiver**




|   |                                    |
|---|------------------------------------|
| 1 | Light-on/Dark-on changeover switch |
| 2 | Sensitivity adjuster               |
| 3 | Operating indicator / dark on      |
| 4 | Signal indicator                   |
| 5 | Operating indicator / light on     |

### Characteristic Curve

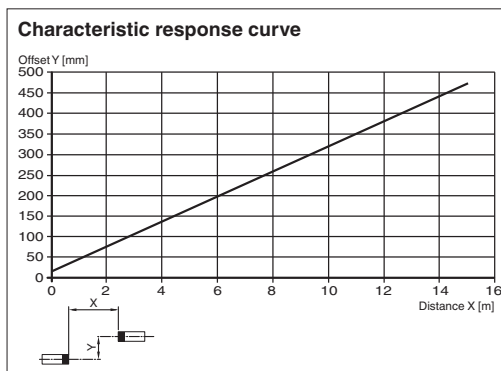


Release date: 2025-01-30 Date of issue: 2025-01-30 Filename: 308440\_eng.pdf

## Characteristic Curve

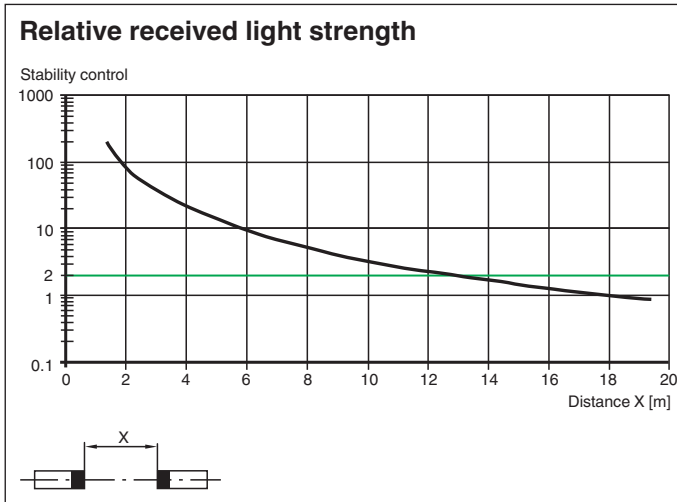

## Configuration

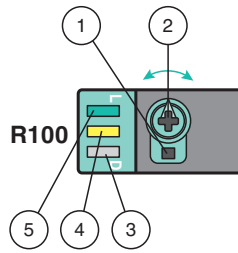

- 1 - Light-on / dark-on changeover switch
- 2 - Sensing range / sensitivity adjuster
- 3 - Operating indicator / dark on
- 4 - Signal indicator
- 5 - Operating indicator / light on

To unlock the adjustment functions turn the sensing range /sensitivity adjuster for more than 180 degrees.

### Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on /dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range /sensitivity adjuster for more than 180 degrees.