



Technical Data

| System components | | |
|--------------------------------------|----------------|---|
| Emitter | | OBE12M-R102-S-IO-V31 |
| Receiver | | OBE12M-R102-2EP-IO-V31 |
| General specifications | | |
| Effective detection range | | 0 ... 12 m |
| Threshold detection range | | 15 m |
| Light source | | LED |
| Light type | | modulated visible red light |
| LED risk group labelling | | exempt group |
| Diameter of the light spot | | approx. 65 mm at a distance of 1 m |
| Opening angle | | 3.7 ° |
| Ambient light limit | | EN 60947-5-2 : 30000 Lux |
| Functional safety related parameters | | |
| MTTF _d | | 462 a |
| Mission Time (T _M) | | 20 a |
| Diagnostic Coverage (DC) | | 0 % |
| Indicators/operating means | | |
| Operation indicator | | LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode |
| Function indicator | | Yellow LED: Permanently lit - light path clear Permanently off - object detected Flashing (4 Hz) - insufficient operating reserve |
| Control elements | | Receiver: light/dark switch |
| Control elements | | Receiver: sensitivity adjustment |
| Parameterization indicator | | IO link communication: green LED goes out briefly (1 Hz) |
| Electrical specifications | | |
| Operating voltage | U _B | 10 ... 30 V DC |
| Ripple | | max. 10 % |
| No-load supply current | I ₀ | Emitter: ≤ 14 mA Receiver: ≤ 13 mA at 24 V supply voltage |
| Protection class | | III |
| Interface | | |
| Interface type | | IO-Link (via C/Q = pin 4) |
| IO-Link revision | | 1.1 |
| Device ID | | Emitter: 0x110405 (1115141) Receiver: 0x110305 (1114885) |
| Transfer rate | | COM2 (38.4 kBit/s) |
| Min. cycle time | | 2.3 ms |
| Process data width | | Emitter: Process data output: 2 Bit Receiver: Process data input: 2 Bit Process data output: 2 Bit |
| SIO mode support | | yes |
| Compatible master port type | | A |
| Input | | |
| Test input | | emitter deactivation at +U _B |
| Output | | |
| Switching type | | The switching type of the sensor is adjustable. The default setting is: C/Q - Pin4: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link /Q - Pin2: NPN normally closed / light-on, PNP normally open / dark-on |
| Signal output | | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected |
| Switching voltage | | max. 30 V DC |
| Switching current | | max. 100 mA , resistive load |
| Usage category | | DC-12 and DC-13 |

Technical Data

| | | |
|---|-------|--|
| Voltage drop | U_d | ≤ 1.5 V DC |
| Switching frequency | f | 1000 Hz |
| Response time | | 0.5 ms |
| Compliance with standards and directives | | |
| Directive conformity | | |
| EMC Directive 2004/108/EC | | EN 60947-5-2:2007+A1:2012 |
| Standard conformity | | |
| Product standard | | EN 60947-5-2:2007+A1:2012 IEC 60947-5-2:2007 + A1:2012 |
| Standards | | UL 60947-5-2: 2014 IEC 61131-9:2013 EN 62471:2008 EN 61131-9:2013 |
| Approvals and certificates | | |
| UL approval | | E87056 , cULus Listed , class 2 power supply , type rating 1 |
| Ambient conditions | | |
| Ambient temperature | | -40 ... 60 °C (-40 ... 140 °F) |
| Storage temperature | | -40 ... 70 °C (-40 ... 158 °F) |
| Mechanical specifications | | |
| Housing width | | 13.9 mm |
| Housing height | | 33.8 mm |
| Housing depth | | 18.3 mm |
| Degree of protection | | IP67 / IP69 / IP69K |
| Connection | | M8 x 1 connector, 4-pin |
| Material | | |
| Housing | | PC (Polycarbonate) |
| Optical face | | Float glass |
| Mass | | Emitter: approx. 10 g receiver: approx. 10 g |

Connection



Release date: 2023-01-27 Date of issue: 2023-01-27 Filename: 322702_eng.pdf

Connection Assignment




Wire colors in accordance with EN 60947-5-2

| | | |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue) |
| 4 | BK | (black) |


Assembly

Emitter




| | |
|---|---------------------|
| 1 | Operating indicator |
|---|---------------------|

Receiver




| | |
|---|------------------------------------|
| 1 | Light-on/dark-on changeover switch |
| 2 | Sensitivity adjuster |
| 3 | Operating indicator / light on |
| 4 | Signal indicator |
| 5 | Operating indicator / dark on |

Characteristic Curve

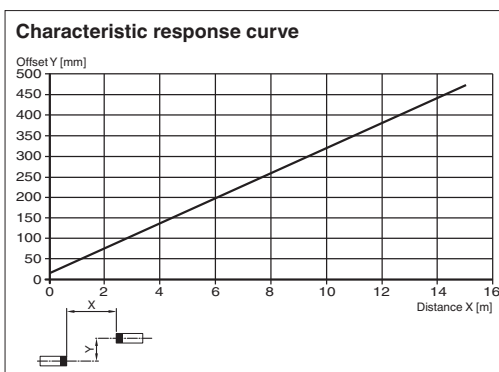





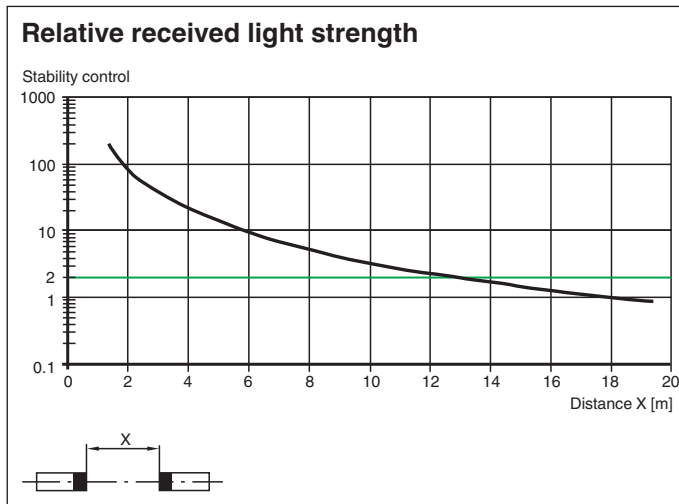








Release date: 2023-01-27 Date of issue: 2023-01-27 Filename: 322702_eng.pdf


Characteristic Curve



Accessories

| | | |
|---|-----------------------------|--|
|  | OMH-R101 | Mounting Clamp |
|  | OMH-R101-Front | Mounting Clamp |
|  | OMH-4.1 | Mounting Clamp |
|  | OMH-ML6 | Mounting bracket |
|  | OMH-ML6-U | Mounting bracket |
|  | OMH-ML6-Z | Mounting bracket |
|  | ICE2-8IOL-K45S-RJ45 | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal |
|  | ICE3-8IOL-K45P-RJ45 | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals |
|  | ICE3-8IOL-K45S-RJ45 | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal |
|  | IO-Link-Master02-USB | IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection |
|  | ICE2-8IOL-K45P-RJ45 | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors |
|  | V31-GM-2M-PUR | Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable grey |
|  | V31-WM-2M-PUR | Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey |

Configuration

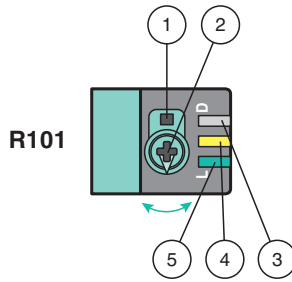

- 1 - Light on / dark on changeover switch
- 2 - Sensing range / sensitivity adjuster
- 3 - Operating indicator / dark on
- 4 - Signal indicator
- 5 - Operating indicator / light on

To unlock the adjustment functions turn the sensing range adjuster for more than 180 degrees.

Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range /sensitivity adjuster counterclockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

Light on / Dark on Configuration

Press the light on / dark on changeover switch for more than 1 second (less than 4 seconds). The light on / dark on mode changes and the operating indicators are activated accordingly.

If you press the light on / dark on changeover switch for more than 4 seconds, the light on / dark on mode changes back to the original setting. On release of the light on / dark on changeover switch the current state is activated.

Restore Factory Settings

Press the light on / dark on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light on / dark on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.