




## Mounting aid

### MH 02-L

- Suitable for VariKont-L sensors
- Aluminum profiles, pre-mounted
- Simple and fast mounting
- Sensor can be mounted length or crosswise on the profile section
- Maximum range of adjustment: 60 mm

Mounting aid for VariKont-L

## Dimensions

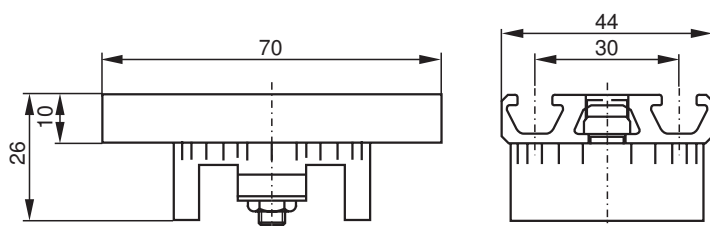

## Technical Data

### Mechanical specifications

Material

Profile rail: aluminum  
socket: diecast zinc

## Mounting

### Installation note:

- Loosen the connection between the profile section and the base by unscrewing the internal hexagon screws (DIN 7984)
- Carefully remove the retaining piece from the base and rotate it through approx. 90°
- Put the mounting accessories on the C-Schiene at desired position
- Rotate the retaining piece back, lightly tighten the internal hexagon head screws
- Pre-adjust the profile section using the elongated hole
- Tighten the internal hexagon head screws
- Insert the M5 slotted cylindrical head screws provided in the sensor base and fix the sliding blocks to them and tighten with approx. 3 turns of the screws
- Slide the loosely attached sliding blocks into the profile section
- Position the sensor and fasten the screws

## Scope of Delivery

### Supplied accessories

Mounting bracket MH 02-L, consisting of

- 1 profile rail (70 mm) with elongated hole pre-mounted on a base for direct installation on the C-rail according to EN 500024 (DIN 43662)
- 2 sliding blocks (M5) for sensor mounting
- 2 slotted cylindrical head screws (M5 x 35/DIN 912) for sensor mounting

## Application

