



# Singleturn absolute encoder BVS58


- Industrial standard housing  $\varnothing 58$  mm
- 13 Bit singleturn
- Output code: gray and binary
- Transfer of position data with 4 AS-Interface slaves
- Parameterization and addressing via AS-Interface
- Servo or clamping flange



## Function


In modern machines and systems, binary sensors and actuators are connected together via AS-Interface. Until now it was necessary to go back to the use of costly conventional wiring when wanting to use absolute encoders. The reason for this was that the handshake mode with the control module of the analogue profile proved to be too slow for positioning tasks. In order to meet the real-time demands of many applications, a multi-slave solution using the BVS58 AS-Interface rotary encoders was created. The position value of 13 Bits in length is transferred within a single cycle via the 4 integrated AS-Interface chips to the master and made available to the PLC. This singleturn absolute encoder is available either in clamping flange design with a shaft 10 mm in diameter x 20 mm or in servo flange design with a shaft 6 mm in diameter x 10 mm.

## Dimensions

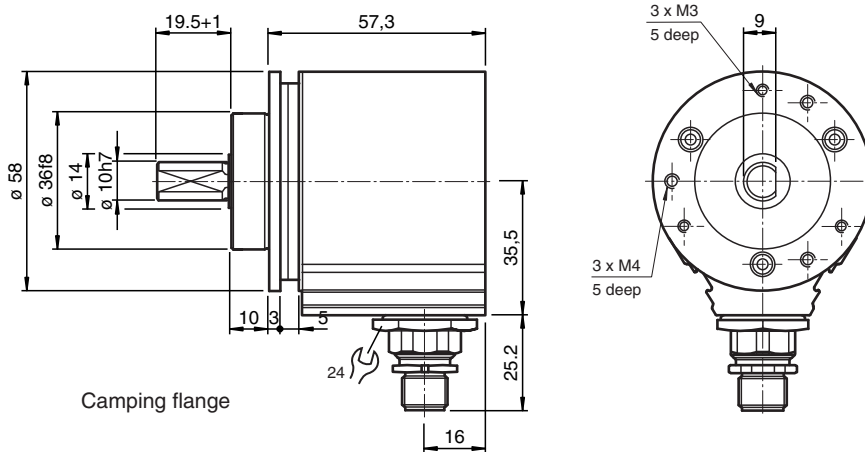

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t37283\_eng.pdf

## Dimensions

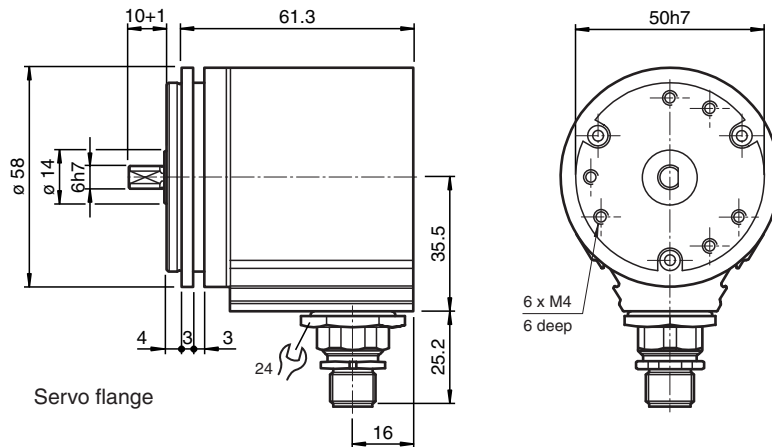

## Technical Data




General specifications			
Detection type		photoelectric sampling	
Device type		Singleturn absolute encoder	
Electrical specifications			
Operating voltage	$U_B$	29.5 ... 31.6 V DC	
No-load supply current	$I_0$	max. starting current 155 mA , operating current max. 85 mA	
Linearity		$\pm 1$ LSB	
Output code		programmable, Gray code, binary code	
Code course (counting direction)		programmable, cw ascending (clockwise rotation, code course ascending) cw descending (clockwise rotation, code course descending)	
Interface			
Interface type		AS-Interface	
Resolution			
Single turn		13 Bit	
Overall resolution		13 Bit	
Transfer rate		max. 0.167 MBit/s	
Standard conformity		AS-Interface	
Connection			
Connector		type V1, M12, 4-pin	
Standard conformity			
Degree of protection		DIN EN 60529, IP65	
Climatic testing		DIN EN 60068-2-3, no moisture condensation	
Emitted interference		EN 61000-6-4:2007	
Noise immunity		EN 61000-6-2:2005	
Shock resistance		DIN EN 60068-2-27, 100 g, 11 ms	
Vibration resistance		DIN EN 60068-2-6, 10 g, 10 ... 2000 Hz	
Ambient conditions			
Operating temperature		-20 ... 70 °C (-4 ... 158 °F)	
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)	
Mechanical specifications			
Material		housing: powder coated aluminum flange: aluminum shaft: stainless steel	
Mass		approx. 330 g	
Rotational speed		max. 10000 min <sup>-1</sup>	
Moment of inertia		30 gcm <sup>2</sup>	
Starting torque		$\leq 2$ Ncm	

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t37283\_eng.pdf

## Technical Data


Shaft load		
Axial		40 N at max. 6000 min <sup>-1</sup> 10 N at max. 12000 min <sup>-1</sup>
Radial		60 N at max. 6000 min <sup>-1</sup> 20 N at max. 12000 min <sup>-1</sup>

## Accessories

	<b>9203</b>	Angled flange
	<b>9300</b>	Mounting bracket for servo flange
	<b>MBT-36ALS</b>	Spring-loaded mounting bracket with a diameter of 36 mm

**Connection**

Signal	V1 connector, 4-pin	Explanation
AS-Interface +	1	
Reserved	2	Not wired
AS-Interface -	3	
Reserved	4	Not wired

**Interface**

**Addresses**

	Slave A	Slave B	Slave C	Slave D
Preset address	1	2	3	4
IO code	7	0	0	0
ID code	F	F	F	F



When readdressing by means of a bus master or a programming device, it is absolutely essential to assign different addresses to the four integrated AS-Interface chips.

**Parameterization**

**Parameter bits**

The four parameter bits of slave A are used to set the parameters of the rotary encoder. The parameter bits of slave B, C and D are not used.

Status of parameter bit	Slave A			
	P0	P1	P2	P3
0	Gray code	Transfer with flag bits	Descending counting direction for clockwise rotation	Not used
1	Binary code	Transfer without flag bits	Ascending counting direction for clockwise rotation	Not used

**Data bits**

**From the AS-Interface master to the rotary encoder**

Data from the AS-Interface master are transferred to the rotary encoder via slave A, which works bidirectionally. Slaves B, C and D work unidirectionally, i.e. they are incapable of receiving data.

Status of D0/D1 or D2/D3	Slave A					
	D0/D1			D2/D3		
00	Normal mode			Position data are not saved!		
01	Rotary encoder is set to ¼ of the singleturn resolution.			Position data are saved!		
10	Rotary encoder is set to 0.			Position data are saved!		
11	Normal mode			Position data are not saved!		

When a change is made in data bits D2 and D3 from 01 to 10 or vice-versa, position data are resaved in the rotary encoder.

**From the rotary encoder to the AS-Interface master**

Depending on the value of parameter bit P1 of slave A, data transfer to the AS-Interface master takes place with or without flag bits.

P1 = 1: Transfer without flag bits

Slave A				Slave B				Slave C				Slave D			
D0	D1	D2	D3	D0	D1	D2	D3	D0	D1	D2	D3	D0	D1	D2	D3
Bit 0	Bit 1	Bit 2	Bit 3	Bit 4	Bit 5	Bit 6	Bit 7	Bit 8	Bit 9	Bit 10	Bit 11	Bit 12	Not used!		

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: i37283\_eng.pdf

P1 = 0: Transfer with flag bits MA, MB, MC, MD

Slave A				Slave B				Slave C				Slave D			
D0	D1	D2	D3	D0	D1	D2	D3	D0	D1	D2	D3	D0	D1	D2	D3
Bit 0	Bit 1	Bit 2	MA	Bit 3	Bit 4	Bit 5	MB	Bit 6	Bit 7	Bit 8	MC	Bit 9	Bit 10	Bit 11	MD

## Interface

### Operating modes

#### Address assignments for the four slaves

The AS-Interface master accesses all slaves one after the other within an AS-Interface cycle in order to transfer output data to slave A or to read in input data from the slaves. The singleturn absolute encoder uses only four AS-Interface chips to transfer the position data that are 13 bits wide, i. e. four slave addresses are assigned.

Since these four slaves are queried one after the other, the data may originate from any one of four different sampling times. To minimise the influence of this effect, sequential addresses (n, n+1, n+2 and n+3) should be assigned to slaves A, B, C and D.

Furthermore, it should be noted that slave A is responsible for controlling the functions of the absolute encoder. If the order of the slaves is changed (D = n, C = n+1, B = n+2, A = n+3), the output word, which is supposed to be transmitted by the function control module of the absolute encoder, will not be transmitted until slaves D, C and B have been read in.

A memory command would thus only take effect for slave A. The command would not take effect for slaves that were already read until the next read cycle. Data consistency would be lost because of the change of order.

#### Temporary storage and transfer with flag bits

If individual telegrams of the four slaves to the AS-Interface master suffer interference, it may happen in spite of temporary storage in the rotary encoder that the data that are transferred to the control module do not all originate from the same position data set.

Transferring one flag bit for each slave makes it possible for the control module to check which position data set an individual data set belongs to by comparing the four flag bits. Data bit D2 is used for this purpose.

Example:

Cycle	Slave A Data bit D2	Position data			
		Slave A	Slave B	Slave C	Slave D
1	0	XXX0	XXX0	XXX0	XXX0
2	1	XXX1	XXX1	XXX1	XXX1
3	0	XXX0	XXX0	XXX0	XXX0
4	1	XXX1	XXX1	XXX1	XXX1
etc.					

Bit D2 is influenced by the control module. Bit 4 of the input data corresponds to the value of this bit for each slave.


D2 is set to 0 in cycle 1. If the value of bit 4 of a slave were "1", that value would be derived from another cycle. This is a simple way to recognise data consistency.

Transferring the flag bits, however, reduces the usable position data from 13 bits to 12. Masking out the fourth bit of each slave increases slightly the effort of putting together the position data set in the control module.

## Type Code

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t37283\_eng.pdf

**Order code**

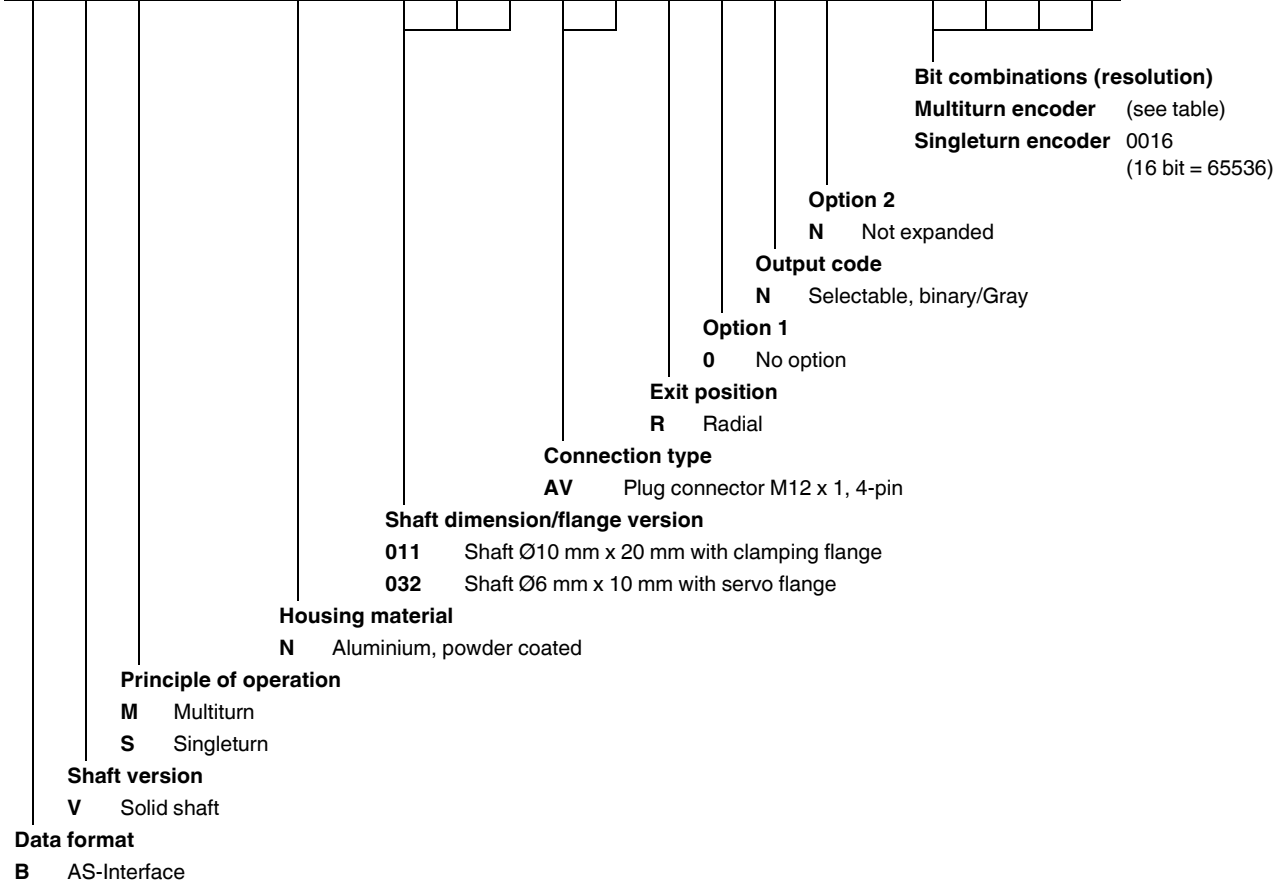

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t37283\_eng.pdf