



## Ultrasonic sensor


UC800-F77S-EP-IO-0,2M-V1-P002

- IO-Link interface for service and process data
- Programmable via DTM with PACTWARE
- Continuous distance value via IO-Link process data
- Selectable sound lobe width
- Synchronization options
- Temperature compensation
- Push-pull output
- Cable with M12 plug
- Customer-specific configuration

Single head system



### Dimensions

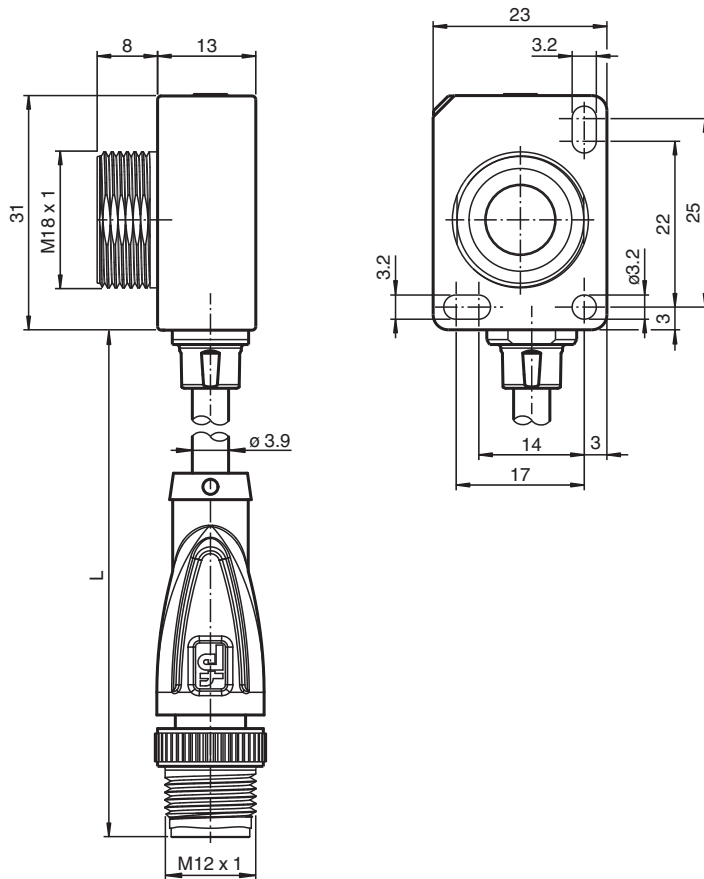

### Technical Data

#### General specifications

Sensing range	60 ... 800 mm
Adjustment range	70 ... 800 mm
Dead band	0 ... 60 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 255 kHz

Release date: 2025-06-03 Date of issue: 2025-06-03 Filename: 266632-100006\_eng.pdf

## Technical Data


Response delay		minimum : 13 ms factory setting: 49 ms
Sensor cycle time		≥ 13 ms (factory setting) ; programmable to 60 s
<b>Memory</b>		
Non-volatile memory		EEPROM
Write cycles		300000
<b>Indicators/operating means</b>		
LED green		solid: power on flashing: standby mode or IO-Link communication
LED yellow		solid: object in evaluation range flashing: switch point programming, object detected
LED red		solid: error flashing: switch point programming, object not detected
<b>Electrical specifications</b>		
Operating voltage	$U_B$	10 ... 30 V DC , ripple 10 % <sub>SS</sub>
No-load supply current	$I_0$	≤ 40 mA
Power consumption	$P_0$	≤ 400 mW
Time delay before availability	$t_v$	≤ 300 ms
<b>Interface</b>		
Interface type		IO-Link (via C/Q = Pin 4)
IO-Link revision		1.1
Device profile		Smart Sensor
Device ID		0x300306 (3146502)
Transfer rate		COM2 (38.4 kBit/s)
Min. cycle time		2.3 ms
Process data width		16 bit
SIO mode support		yes
Compatible master port type		A
<b>Input/Output</b>		
Input/output type		1 synchronization connection, bidirectional
0 Level		0 ... 1 V
1 Level		2.5 V ... $U_B$
Input impedance		> 22 k $\Omega$
Output current		current source < 2.5 mA
Pulse length		≥ 1 ms with external control, low active
Synchronization frequency		
Common mode operation		≤ 82 Hz
Multiplex operation		≤ 82 Hz / n , n = number of sensors , n ≤ 10
<b>Output</b>		
Output type		1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected
Rated operating current	$I_e$	100 mA , short-circuit/overload protected
Voltage drop	$U_d$	≤ 2.5 V
Repeat accuracy		≤ ± 0.1 % of full-scale value
Switching frequency	f	factory setting: 12 Hz programmable max. 27 Hz
Range hysteresis	H	1 % of the adjusted operating range (default settings), programmable , min. 1 mm
Temperature influence		≤ ± 0.75 % of the end value (with temperature compensation) from 10 minutes after switching on the sensor ; 0.17 %/K (without temperature compensation)
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards		EN IEC 60947-5-2:2020 IEC 60947-5-2:2019 IEC 61131-9:2013
<b>Approvals and certificates</b>		
UL approval		cULus Listed, Class 2 Power Source

Release date: 2025-06-03 Date of issue: 2025-06-03 Filename: 266632-100006\_eng.pdf

## Technical Data


CCC approval	CCC approval / marking not required for products rated ≤36 V	
<b>Ambient conditions</b>		
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F) When fixing with one M18 nut, the temperature range begins with 0 °C (32 °F).	
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)	
<b>Mechanical specifications</b>		
Connection type	fixed cable with plug	
Degree of protection	IP67	
Material		
Housing	Polycarbonate	
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam	
Connector		
Threading	M12	
Number of pins	4	
Cable		
Length	L	200 mm
Installation position	any position	
Mass	20.5 g	
Tightening torque, fastening screws	with M3 nuts max. 0.2 Nm with M18 nuts max. 1 Nm	
Dimensions		
Height	31 mm	
Width	21 mm	
Length	23 mm	
<b>Factory settings</b>		
Output	Switching point 800 mm Output mode: Switching point Output logic: normally open	
Beam width	wide	
<b>General information</b>		
Scope of delivery	1 Nut plastic	

## Connection Assignment

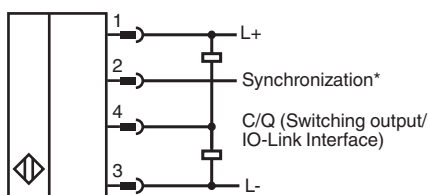

\*if not used connect to ground (0V)

## Connection Assignment




## Connection Assignment

Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)


## Characteristic Curve

### Characteristic response curve

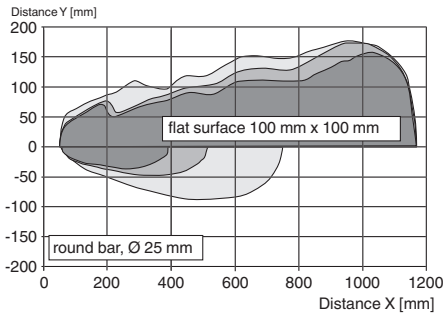


### Switching output modes


1. Switch point mode

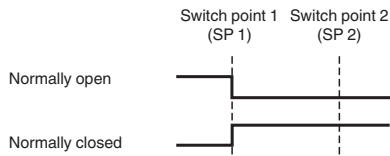


2. Window mode



3. Hysteresis mode



4. Retroreflective mode

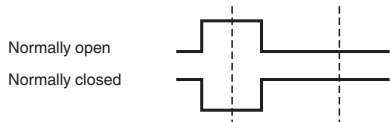

Release date: 2025-06-03 Date of issue: 2025-06-03 Filename: 266632-100006\_eng.pdf

## Function

### Adjustment possibilities

The sensor features a switching output with 2 programmable switch points. Programming the switch points, the output mode, the output logic and the beam width can be done in two different ways:

- Using the sensor's programming button
- Using the IO-link interface of the sensor. This method requires an IO-link master (e.g. IO-link-Master02-USB) and the associated software. The download link is available on the product page for the sensor at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

### Synchronization

The sensor features a synchronization input for suppressing ultrasonic mutual interference („cross talk“).

The following synchronization modes are available:

1. Automatic multiplex mode.
2. Automatic common mode
3. Externally controlled synchronization

### Further Documentation

- For information on programming via programming button and synchronisation you may refer to the commissioning instruction.
- For detailed information on application and programming via IO-Link we provide a manual.