



## Triangulation sensor (BGS) OBT150-R100-2EP1-IO-0,3M-V31



- Miniature design with versatile mounting options
- Best background suppressor in its class
- Precision object detection, almost irrespective of the color
- Extended temperature range  
-40 °C ... 60 °C
- High degree of protection IP69K
- IO-Link interface for service and process data

Triangulation sensor with background suppression



### Function


The R100 series miniature optical sensors are the first devices of their kind to offer an end-to-end solution in a small single standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

**Dimensions**

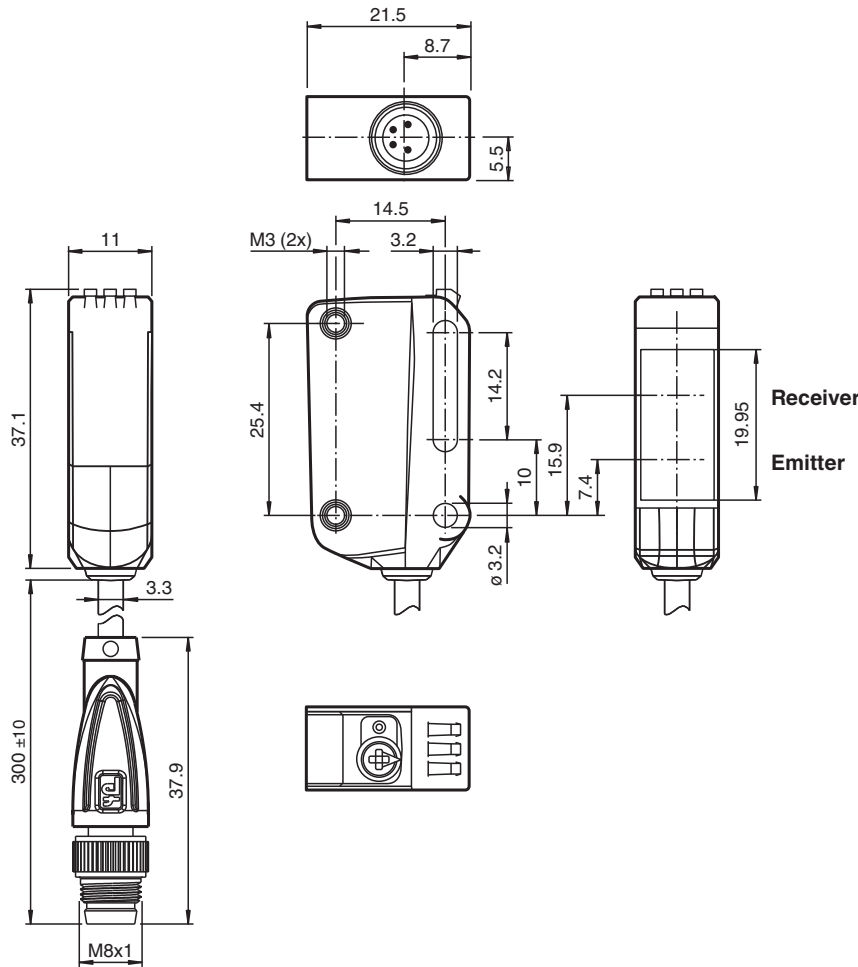

**Technical Data**

| General specifications               |   |
|--------------------------------------|---|
| Detection range                      | 5 ... 150 mm  |
| Detection range min.                 | 5 ... 25 mm   |
| Detection range max.                 | 5 ... 150 mm  |
| Adjustment range                     | 25 ... 150 mm   |
| Reference target                     | standard white, 100 mm x 100 mm   |
| Light source                         | LED   |
| Light type                           | modulated visible red light   |
| LED risk group labelling             | exempt group  |
| Black-white difference (6%/90%)      | < 5 % at 150 mm   |
| Diameter of the light spot           | approx. 10 mm at a distance of 150 mm   |
| Opening angle                        | approx. 3 °   |
| Ambient light limit                  | EN 60947-5-2 : 40000 Lux  |
| Functional safety related parameters |   |
| MTTF <sub>d</sub>                    | 600 a   |
| Mission Time (T <sub>M</sub> )       | 20 a  |
| Diagnostic Coverage (DC)             | 0 %   |
| Indicators/operating means           |   |
| Operation indicator                  | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode |

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 267075-100501\_eng.pdf

## Technical Data

|                                   |       |   |
|-----------------------------------|-------|---|
| Function indicator                |       | LED yellow:<br>constantly on - object detected<br>constantly off - object not detected  |
| Control elements                  |       | Light-on/dark-on changeover switch  |
| Control elements                  |       | Sensing range adjuster  |
| <b>Electrical specifications</b>  |       |   |
| Operating voltage                 | $U_B$ | 10 ... 30 V DC  |
| Ripple                            |       | max. 10 %   |
| No-load supply current            | $I_0$ | < 25 mA at 24 V supply voltage  |
| Protection class                  |       | III   |
| <b>Interface</b>                  |       |   |
| Interface type                    |       | IO-Link ( via C/Q = pin 4 )   |
| IO-Link revision                  |       | 1.1   |
| Device profile                    |       | Smart Sensor  |
| Device ID                         |       | 0x11060F (1115663)  |
| Transfer rate                     |       | COM2 (38.4 kBit/s)  |
| Min. cycle time                   |       | 2.3 ms  |
| Process data width                |       | Process data input 1 Bit<br>Process data output 2 Bit   |
| SIO mode support                  |       | yes   |
| Compatible master port type       |       | A   |
| <b>Output</b>                     |       |   |
| Switching type                    |       | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - Pin4: NPN normally closed / dark-on, PNP normally open / light-on, IO-Link<br>/Q - Pin2: NPN normally open / light-on, PNP normally closed / dark-on |
| Signal output                     |       | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected  |
| Switching voltage                 |       | max. 30 V DC  |
| Switching current                 |       | max. 100 mA , resistive load  |
| Usage category                    |       | DC-12 and DC-13   |
| Voltage drop                      | $U_d$ | $\leq 1.5$ V DC   |
| Switching frequency               | $f$   | 500 Hz  |
| Response time                     |       | 1 ms  |
| <b>Conformity</b>                 |       |   |
| Communication interface           |       | IEC 61131-9   |
| Product standard                  |       | EN 60947-5-2  |
| <b>Approvals and certificates</b> |       |   |
| UL approval                       |       | E87056 , cULus Listed , class 2 power supply , type rating 1  |
| <b>Ambient conditions</b>         |       |   |
| Ambient temperature               |       | -40 ... 60 °C (-40 ... 140 °F) , fixed cable<br>-25 ... 60 °C (-13 ... 140 °F) , movable cable not appropriate for conveyor chains  |
| Storage temperature               |       | -40 ... 70 °C (-40 ... 158 °F)  |
| <b>Mechanical specifications</b>  |       |   |
| Housing width                     |       | 11 mm   |
| Housing height                    |       | 37.1 mm   |
| Housing depth                     |       | 21.5 mm   |
| Degree of protection              |       | IP67 / IP69 / IP69K   |
| Connection                        |       | fixed cable 300 mm with M8 x 1 male connector; 4-pin  |
| Material                          |       |   |
| Housing                           |       | PC (Polycarbonate)  |
| Optical face                      |       | PMMA  |
| Mass                              |       | approx. 17 g  |
| Cable length                      |       | 0.3 m   |

Connection




Connection Assignment



Wire colors in accordance with EN 60947-5-2


- 1 | BN (brown)
- 2 | WH (white)
- 3 | BU (blue)
- 4 | BK (black)

Assembly

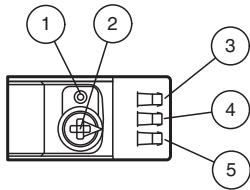




|   |                                      |
|---|--------------------------------------|
| 1 | Light-on / dark-on changeover switch |
| 2 | Sensing range adjuster               |
| 3 | Operating indicator / dark on        |
| 4 | Signal indicator                     |
| 5 | Operating indicator / light on       |

Characteristic Curve

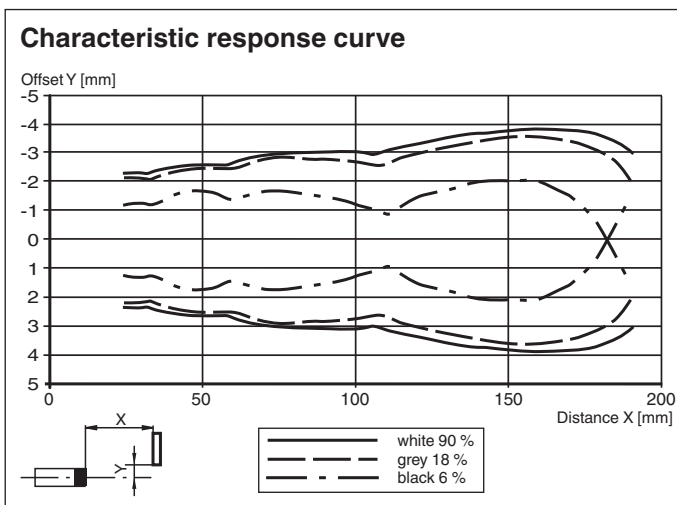

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 267075-100501\_eng.pdf

## Characteristic Curve

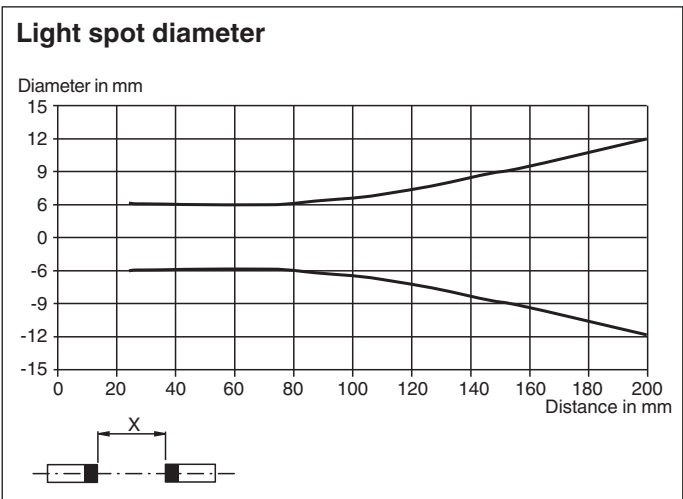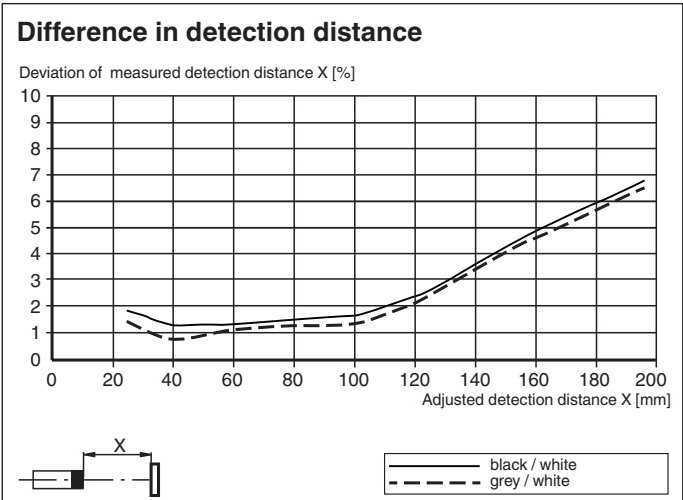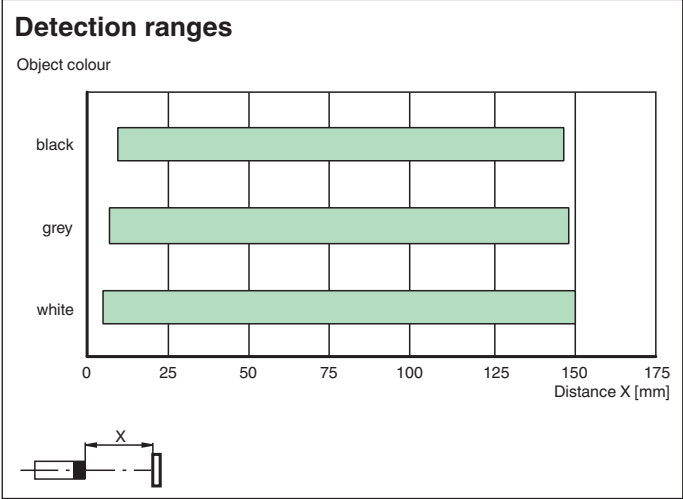










## Accessories

|  |                           |  |
|--|---------------------------|--|
|  | <b>ICE2-8IOL-G65L-V1D</b> | EtherNet/IP IO-Link master with 8 inputs/outputs |
|  | <b>ICE3-8IOL-G65L-V1D</b> | PROFINET IO IO-Link master with 8 inputs/outputs |

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 267075-100501\_eng.pdf

## Accessories

|   |                             |  |
|---|-----------------------------|--|
|  | <b>ICE1-8IOL-G30L-V1D</b>   | Ethernet IO-Link module with 8 inputs/outputs  |
|  | <b>ICE1-8IOL-G60L-V1D</b>   | Ethernet IO-Link module with 8 inputs/outputs  |
|  | <b>ICE2-8IOL-K45P-RJ45</b>  | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors                               |
|  | <b>ICE2-8IOL-K45S-RJ45</b>  | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal                                   |
|  | <b>ICE3-8IOL-K45P-RJ45</b>  | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals                                |
|  | <b>ICE3-8IOL-K45S-RJ45</b>  | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal                                   |
|  | <b>IO-Link-Master02-USB</b> | IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection |
|  | <b>V31-GM-2M-PUR</b>        | Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable grey                                       |
|  | <b>V31-WM-2M-PUR</b>        | Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey   |

## Configuration



- 1 - Light-on / dark-on changeover switch
- 2 - Sensing range / sensitivity adjuster
- 3 - Operating indicator / dark on
- 4 - Signal indicator
- 5 - Operating indicator / light on

To unlock the adjustment functions turn the sensing range /sensitivity adjuster for more than 180 degrees.

### Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on /dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range /sensitivity adjuster for more than 180 degrees.