



## Triangulation sensor (BGS) OBT650-R201-2EP-IO-0,3M-V31



- Medium design with versatile mounting options
- Best background suppressor in its class
- Precision object detection, almost irrespective of the color
- Extended temperature range  
-40 °C ... 60 °C
- High degree of protection IP69K
- IO-Link interface for service and process data

Triangulation sensor with background suppression



### Function


The optical sensors in the series are the first devices to offer an end-to-end solution in a medium-sized standard design – from the thru-beam sensor through to the measuring distance sensor. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

Multi Pixel Technology (MPT) ensures that the standard sensors are flexible and can be adapted to the application environment.

**Dimensions**

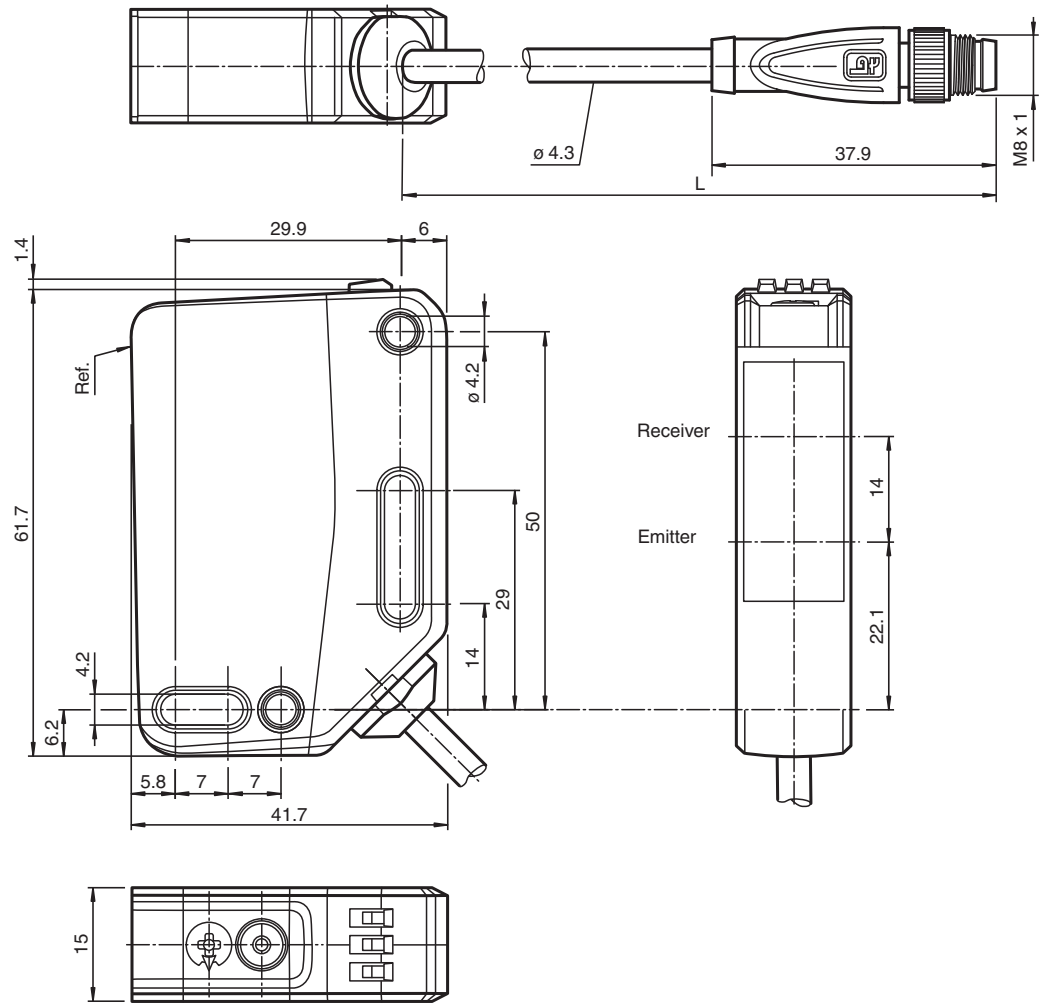

**Technical Data**

| General specifications               |   |
|--------------------------------------|---|
| Detection range                      | 10 ... 650 mm   |
| Detection range min.                 | 10 ... 100 mm   |
| Detection range max.                 | 10 ... 650 mm   |
| Adjustment range                     | 100 ... 650 mm  |
| Reference target                     | standard white, 100 mm x 100 mm   |
| Light source                         | LED   |
| Light type                           | modulated visible red light   |
| LED risk group labelling             | exempt group  |
| Black-white difference (6%/90%)      | < 6% at 650 mm  |
| Diameter of the light spot           | approx. 20 mm x 20 mm at a distance of 650 mm   |
| Opening angle                        | approx. 2°  |
| Ambient light limit                  | EN 60947-5-2 : 70000 Lux  |
| Functional safety related parameters |   |
| MTTF <sub>d</sub>                    | 600 a   |
| Mission Time (T <sub>M</sub> )       | 20 a  |
| Diagnostic Coverage (DC)             | 0 %   |
| Indicators/operating means           |   |
| Operation indicator                  | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode |

Release date: 2023-01-16 Date of issue: 2023-01-16 Filename: 295670-100154\_eng.pdf

## Technical Data

|                                   |       |   |
|-----------------------------------|-------|---|
| Function indicator                |       | LED yellow:<br>constantly on - object detected<br>constantly off - object not detected  |
| Control elements                  |       | Light-on/dark-on changeover switch  |
| Control elements                  |       | Sensing range adjuster  |
| <b>Electrical specifications</b>  |       |   |
| Operating voltage                 | $U_B$ | 10 ... 30 V DC  |
| Ripple                            |       | max. 10 %   |
| No-load supply current            | $I_0$ | < 25 mA at 24 V supply voltage  |
| Protection class                  |       | III   |
| <b>Interface</b>                  |       |   |
| Interface type                    |       | IO-Link ( via C/Q = pin 4 )   |
| IO-Link revision                  |       | 1.1   |
| Device profile                    |       | Identification and diagnosis<br>Smart Sensor type 2.4   |
| Device ID                         |       | 0x111611 (1119761)  |
| Transfer rate                     |       | COM2 (38.4 kBit/s)  |
| Min. cycle time                   |       | 2.3 ms  |
| Process data width                |       | Process data input 1 Bit<br>Process data output 2 Bit   |
| SIO mode support                  |       | yes   |
| Compatible master port type       |       | A   |
| <b>Output</b>                     |       |   |
| Switching type                    |       | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - Pin4: NPN normally open / light-on, PNP normally closed / dark-on, IO-Link<br>/Q - Pin2: NPN normally closed / dark-on, PNP normally open / light-on |
| Signal output                     |       | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected,<br>overvoltage protected   |
| Switching voltage                 |       | max. 30 V DC  |
| Switching current                 |       | max. 100 mA , resistive load  |
| Usage category                    |       | DC-12 and DC-13   |
| Voltage drop                      | $U_d$ | $\leq 1.5$ V DC   |
| Switching frequency               | f     | 500 Hz  |
| Response time                     |       | 1 ms  |
| <b>Conformity</b>                 |       |   |
| Communication interface           |       | IEC 61131-9   |
| Product standard                  |       | EN 60947-5-2  |
| <b>Approvals and certificates</b> |       |   |
| UL approval                       |       | E87056 , cULus Listed , class 2 power supply , type rating 1  |
| CCC approval                      |       | CCC approval / marking not required for products rated $\leq 36$ V  |
| <b>Ambient conditions</b>         |       |   |
| Ambient temperature               |       | -40 ... 60 °C (-40 ... 140 °F) , fixed cable<br>-20 ... 60 °C (-4 ... 140 °F) , movable cable not appropriate for conveyor chains   |
| Storage temperature               |       | -40 ... 70 °C (-40 ... 158 °F)  |
| <b>Mechanical specifications</b>  |       |   |
| Housing width                     |       | 15 mm   |
| Housing height                    |       | 61.7 mm   |
| Housing depth                     |       | 41.7 mm   |
| Degree of protection              |       | IP67 / IP69 / IP69K   |
| Connection                        |       | fixed cable 300 mm with M8 x 1 male connector; 4-pin  |
| Material                          |       |   |
| Housing                           |       | PC (Polycarbonate)  |
| Optical face                      |       | PMMA  |
| Mass                              |       | approx. 52 g  |
| Cable length                      |       | 0.3 m   |

## Connection




## Connection Assignment



Wire colors in accordance with EN 60947-5-2


|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |

## Assembly

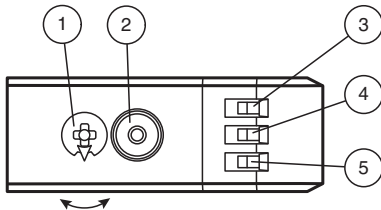



|   |                                      |    |
|---|--------------------------------------|----|
| 1 | Sensitivity adjustment               |    |
| 2 | Light-on / dark-on changeover switch |    |
| 3 | Operating indicator / dark on        | GN |
| 4 | Signal indicator                     | YE |
| 5 | Operating indicator / light on       | GN |

## Characteristic Curve

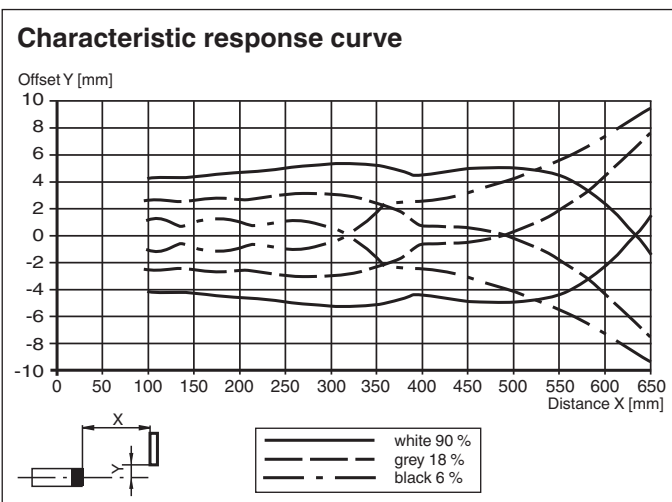

Release date: 2023-01-16 Date of issue: 2023-01-16 Filename: 295670-100154\_eng.pdf

## Characteristic Curve

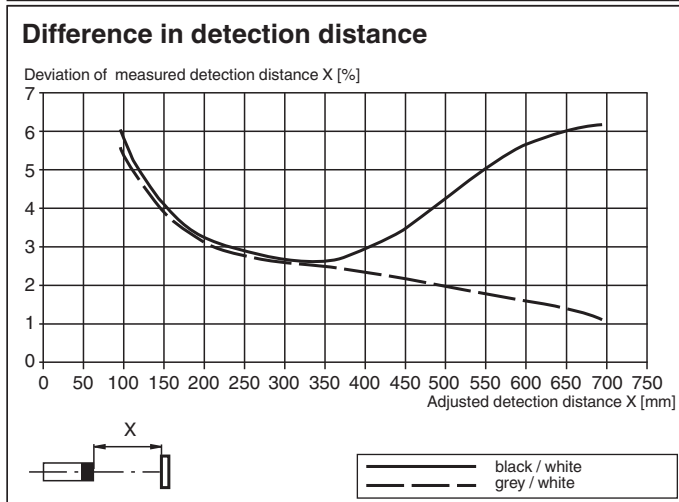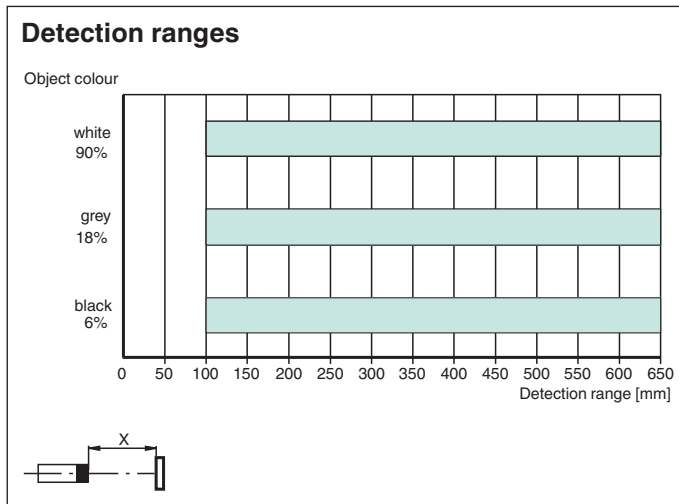










## Accessories

|  |                             |   |
|--|-----------------------------|---|
|  | <b>OMH-RL31-02</b>          | Mounting bracket narrow                                       |
|  | <b>OMH-RL31-03</b>          | Mounting bracket narrow                                       |
|  | <b>OMH-RL31-04</b>          | Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm |
|  | <b>OMH-RL31-07</b>          | Mounting bracket including adjustment                         |
|  | <b>OMH-RL31-08</b>          | Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm |
|  | <b>OMH-R20x-Quick-Mount</b> | Quick mounting accessory                                      |
|  | <b>ICE2-8IOL-G65L-V1D</b>   | EtherNet/IP IO-Link master with 8 inputs/outputs              |
|  | <b>ICE3-8IOL-G65L-V1D</b>   | PROFINET IO IO-Link master with 8 inputs/outputs              |

Release date: 2023-01-16 Date of issue: 2023-01-16 Filename: 295670-100154\_eng.pdf

## Accessories

|  |                             |  |
|--|-----------------------------|--|
|   | <b>ICE2-8IOL-K45S-RJ45</b>  | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal                                   |
|   | <b>ICE3-8IOL-K45P-RJ45</b>  | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals                                |
|   | <b>ICE3-8IOL-K45S-RJ45</b>  | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal                                   |
|   | <b>IO-Link-Master02-USB</b> | IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection |
|   | <b>ICE1-8IOL-G30L-V1D</b>   | Ethernet IO-Link module with 8 inputs/outputs  |
|   | <b>ICE1-8IOL-G60L-V1D</b>   | Ethernet IO-Link module with 8 inputs/outputs  |
|   | <b>ICE2-8IOL-K45P-RJ45</b>  | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors                               |
|   | <b>V31-GM-2M-PUR</b>        | Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable grey                                       |
|  | <b>V31-WM-2M-PUR</b>        | Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey   |

## Configuration

To unlock the adjustment functions, rotate the sensing range/sensitivity adjuster by more than 180°.

### Sensing Range/Sensitivity

To increase the sensing range/sensitivity, rotate the sensing range/sensitivity adjuster clockwise.

To reduce the sensing range/sensitivity, rotate the sensing range/sensitivity adjuster counter-clockwise.

As soon as the end of the adjustment range is reached, the signal indicator flashes at 8 Hz.

### Configuring Light On/Dark On

Press the light-on/dark-on changeover switch for more than 1 second (but less than 4 seconds). "Light on/dark on" mode changes and the relevant operating indicator lights up.

If you press the light-on/dark-on changeover switch for longer than 4 seconds, the "light on/dark on" mode will switch back to the original setting. The current status is activated when the light-on/dark-on changeover switch is released.

### Restoring Factory Settings

Press the light-on/dark-on changeover switch for more than 10 seconds (but less than 30 seconds) until all LEDs go out. When the light-on/dark-on changeover switch is released, the signal indicator lights up. After 5 seconds, the sensor resumes operation with the factory settings.

The adjustment functions are locked after 5 minutes of inactivity. To unlock the adjustment functions, rotate the sensing range/sensitivity adjuster again by more than 180°.