



# SMART Transmitter Power Supply/SMART Current Driver

## KCD2-SCS-2


- 2-channel signal conditioner
- 24 V DC supply (Power Rail)
- Analog input (AI), Analog output (AO)
- Operates as transmitter power supply or current driver
- Housing width 12.5 mm
- Up to SIL 2 (SC 3) acc. to IEC/EN 61508



### Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. Each device channel works as a transmitter power supply or a current driver. The device transfers data by using a current signal. The device supports a bi-directional communication for SMART devices that use current modulation to transmit data and voltage modulation to receive data. For current driver operation, an open field circuit presents a high impedance to the control side to allow lead breakage to be monitored by control systems.

### Connection

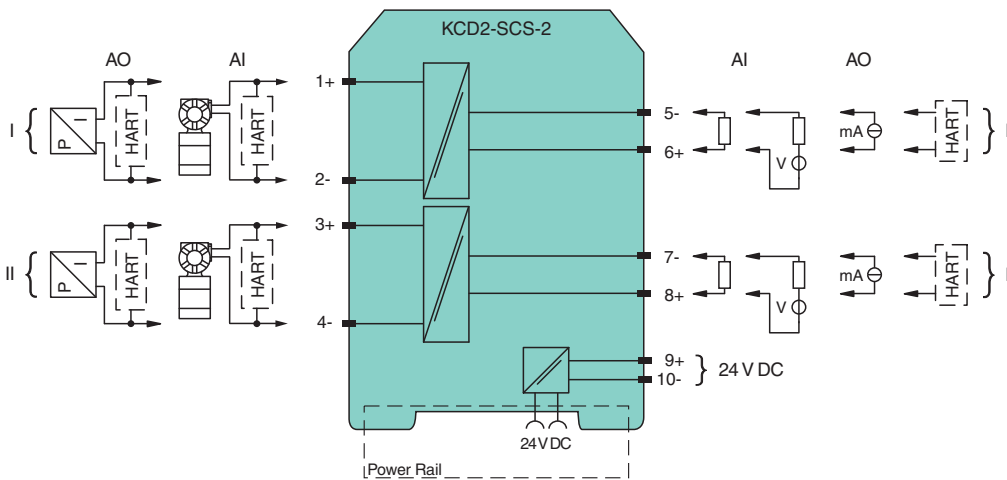

### Technical Data

General specifications	
Signal type	Analog input/analog output
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 2
Systematic capability (SC)	SC 3
Supply	
Connection	Power Rail or terminals 9+, 10-
Rated voltage	$U_r$ 19 ... 30 V DC
Ripple	max. 10 %
Rated current	$I_r$ max. 88 mA at 24 V

Release date: 2023-08-10 Date of issue: 2023-08-10 Filename: 70166765\_eng.pdf

## Technical Data

Power dissipation	max. 1.4 W
Power consumption	max. 2.1 W
<b>Analog input</b>	
Number of channels	2
Suitable field devices	2-wire SMART transmitters
Signal	0/4 ... 20 mA , limited to approx. 30 mA
<b>Field circuit</b>	
Available voltage	min. 15 V at 20 mA min. 18 V at 4 mA
<b>Control circuit</b>	
Input voltage	terminals 5-, 6+; 7-, 8+
Load	Voltage across terminals 10 ... 30 V. If the current is supplied from a source > 24 V, series resistance of $\geq (V - 24)/0.02 \Omega$ is needed, where V is the source voltage. The maximum value of the resistance is $(V - 10)/0.02 \Omega$ . (sink output)
Ripple	max. 350 $\Omega$ (source output)
	20 mV <sub>eff</sub>
<b>Analog output</b>	
Number of channels	2
Suitable field devices	SMART I/P converters (positioner), on-site-displays
Signal	0/4 ... 20 mA , limited to approx. 30 mA
<b>Field circuit</b>	
Load	terminals 1+, 2-, 3+, 4-
Voltage	max. 650 $\Omega$
Ripple	min. 13 V at 20 mA
	20 mV <sub>eff</sub> , on all signal terminals
<b>Control circuit</b>	
Voltage drop	terminals 5-, 6+; 7-, 8+
Line fault detection	max. 6 V
	> 100 k $\Omega$ at max. 30 V, with field wiring open
<b>Transfer characteristics</b>	
Deviation	max. 20 $\mu$ A incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage
Influence of ambient temperature	< 2 $\mu$ A/K (-40 ... 70 °C (-40 ... 158 °F))
Frequency range	field side into the control side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 3 kHz (-3 dB)
Settling time	max. 200 ms
Rise time/fall time	max. 100 ms (10 ... 90 %)
<b>Galvanic isolation</b>	
Field circuit/control circuit	basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Control circuit/control circuit	functional isolation, rated voltage: 50 V
Field circuit/power supply	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Control/power supply	basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>	
Display elements	LED
Factory setting	analog input with source output
Configuration	via DIP switches
Labeling	space for labeling at the front
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
<b>Conformity</b>	
Electromagnetic compatibility	NE 21:2017 EN 61326-3-2:2018
Degree of protection	IEC 60529:2001
<b>Ambient conditions</b>	
Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)
<b>Mechanical specifications</b>	
Degree of protection	IP20


Release date: 2023-08-10 Date of issue: 2023-08-10 Filename: 70166765\_eng.pdf

## Technical Data

Connection	screw terminals
Mass	approx. 115 g
Dimensions	12.5 x 124 x 114 mm (0.5 x 4.9 x 4.5 inch) (W x H x D) , housing type A2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

## Function

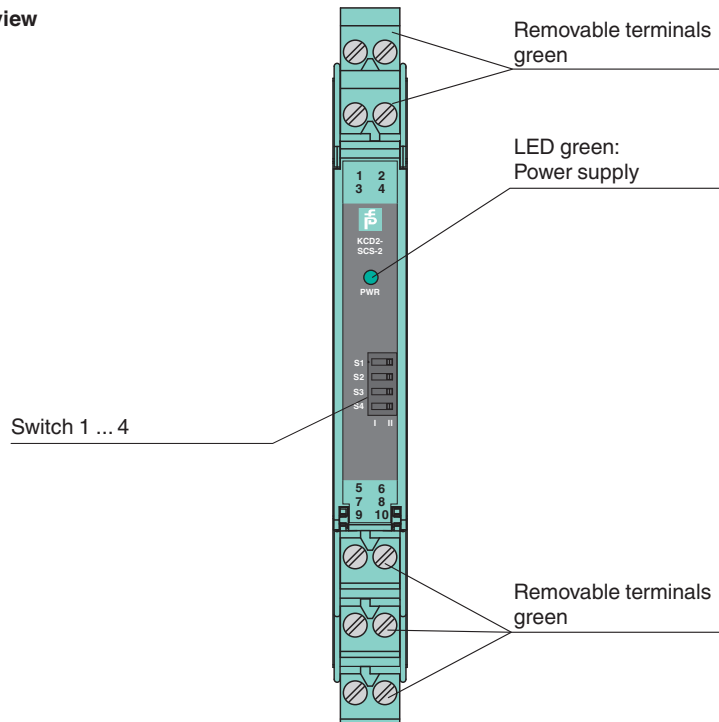


Front view




## Matching System Components

	<b>KFD2-EB2</b>	Power Feed Module
	<b>UPR-03</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	<b>UPR-03-M</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	<b>UPR-03-S</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	<b>K-DUCT-GY</b>	Profile rail, wiring comb field side, gray
	<b>K-DUCT-GY-UPR-03</b>	Profile rail with UPR-03-* insert, 3 conductors, wiring comb field side, gray

**Accessories**

	<b>EBP 2- 5</b>	Insertion bridge for connectors, 2-pin, fully insulated
	<b>KC-ST-5GN</b>	Terminal block for KC modules, 2-pin screw terminal, green
	<b>KF-CP</b>	Red coding pins, packaging unit: 20 x 6

**Configuration**

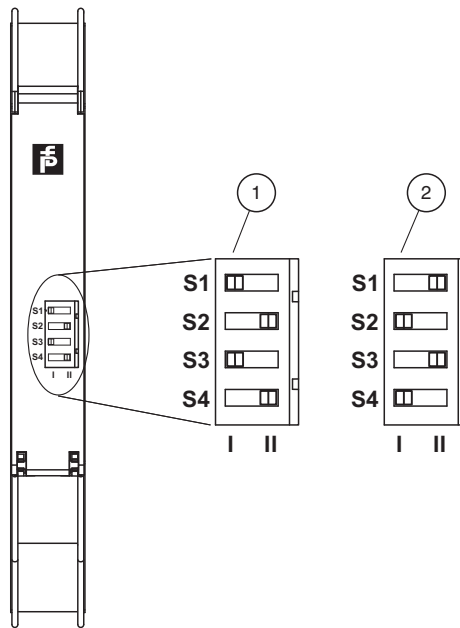

- 1 Analog input with current source output
- 2 Analog input with current sink output, analog output

**Switch position**

Function		Switch			
		Channel 1		Channel 2	
Field side	Control side	S1	S2	S3	S4
Analog input	Current source	I	II	I	II
Analog input	Current sink	II	I	II	I
Analog output		II	I	II	I

Factory setting: analog input with current source output

Release date: 2023-08-10 Date of issue: 2023-08-10 Filename: 70166765\_eng.pdf