



Power Hub Motherboard

FieldConnex® Fieldbus

MBHC-FB-8R.HSC*

- 8 segments, redundant, individual modules per segment
- Supports all PLC and PCS hosts
- High-power trunk: Live work on devices in any hazardous area
- Best quality, smallest size and lowest heat dissipation
- For FOUNDATION Fieldbus H1
- Optional advanced diagnostics
- Passive impedance for high reliability
- Supports Ex ic voltage limitation
- Installation in Zone 2/Div. 2
- Spring terminals or screw terminals selectable


Power hub motherboard with host system connectors



Function

The FieldConnex® compact Power Hub is a modular fieldbus power supply for eight segments with lowest power dissipation and smallest foot print. It supports explosion protection e.g. the high-power trunk for longest cable run and highest device count. The Power Hub supports optional advanced diagnostics for fast fieldbus commissioning and online monitoring. The motherboard is the wiring interface and is equipped with two DB 25 connectors on the left side. The version with type code extension ".R" has DB 25 connectors on the right side for symmetrical cabinet layout. Manufactured cables with DCS system plugs reduce the number of connection points and effort for checkout. Sockets for all modules enable simple installation and replacement without tools. For power redundancy with seamless transfer, pairs of modules feed each segment. Wire connections can be selected as spring terminals or screw terminals. This design allows the most compact cabinet layout. Excellent availability and a very long service life are achieved through: passive impedance filter per segment, high-availability fieldbus termination and plugs with retaining screws. Electronics are optimized for lowest power dissipation and compactness.

Connection

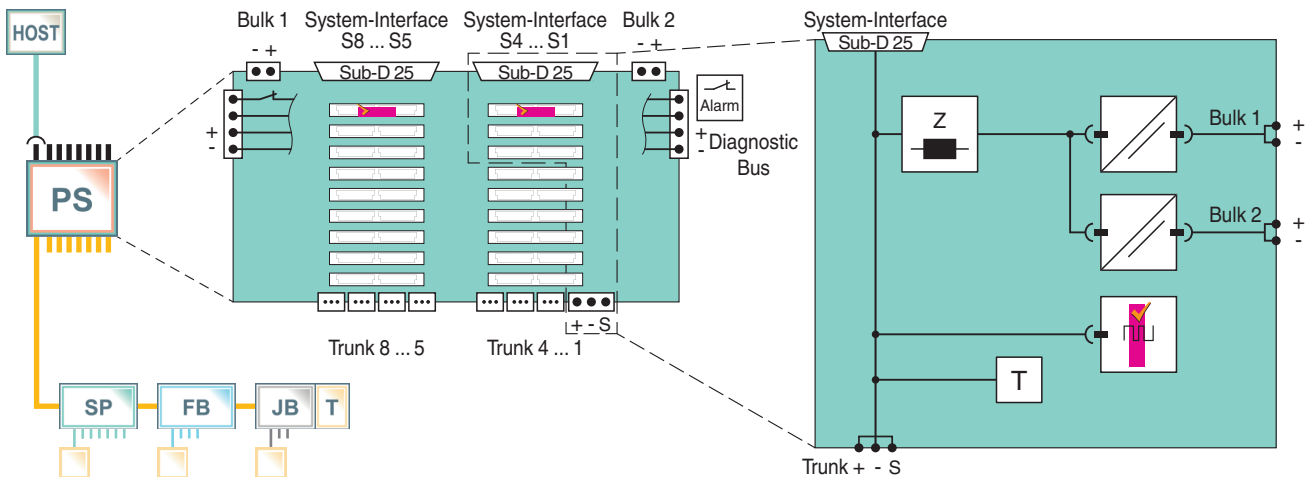

Technical Data

General specifications	
Design / Mounting	Motherboard based
Installation in hazardous area	Zone 2 / Div. 2
Supply	
Connection	redundant
Rated voltage	U_r 19.2 ... 35 V SELV/PELV

Release date: 2024-11-27 Date of issue: 2024-11-27 Filename: t169722_eng.pdf

Technical Data

Rated current	I_r	16 A
Power dissipation		typ. 0.4 W per segment
Fieldbus connection		
Number of segments		8 Redundant Power Supply
Host-side		system specific cable connection
Terminating resistor		100 Ω integrated
Indicators/operating means		
Fault signal		VFC alarm 1 A, 30 V DC, normally closed
Galvanic isolation		
Fieldbus segment/Fieldbus segment		functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}
Fieldbus segment/Supply		functional insulation acc. to IEC 62103, rated insulation voltage 250 V _{eff}
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Standard conformity		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529
Fieldbus standard		IEC 61158-2
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		< 95 % non-condensing
Shock resistance		15 g 11 ms
Vibration resistance		1 g , 10 ... 150 Hz
Pollution degree		max. 2, according to IEC 60664
Corrosion resistance		acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Connection type		screw terminal , pluggable spring terminal , pluggable
Core cross section		2.5 mm ²
Housing material		Polycarbonate
Degree of protection		IP20
Mass		approx. 1350 g
Dimensions		
Height		150 mm
Width		268 mm
Depth		69 mm
Mounting		DIN rail mounting
Data for application in connection with hazardous areas		
Certificate		TÜV 10 ATEX 555761X
Marking		Ⓔ II 3G Ex ec IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		CoC 3024816, CoC 3024816C
Approved for		Class I, Division 2, Groups A, B, C, D, T4 / Class I, Zone 2, AEx/Ex nA IIC T4
IECEx approval		IECEx TUN 13.0037X
Approved for		Ex ec IIC T4 Gc
Certificates and approvals		
Marine approval		DNV A-14038
General information		


Release date: 2024-11-27 Date of issue: 2024-11-27 Filename: t169722_eng.pdf

Technical Data

Supplementary information


Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com.

Assembly

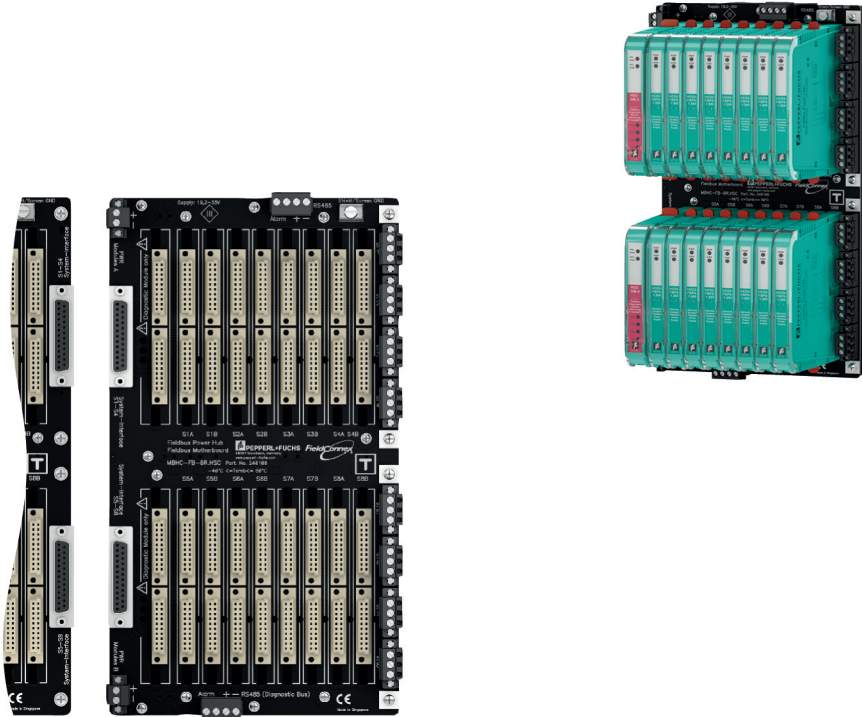

Additional Information

Dimensions and Assembly

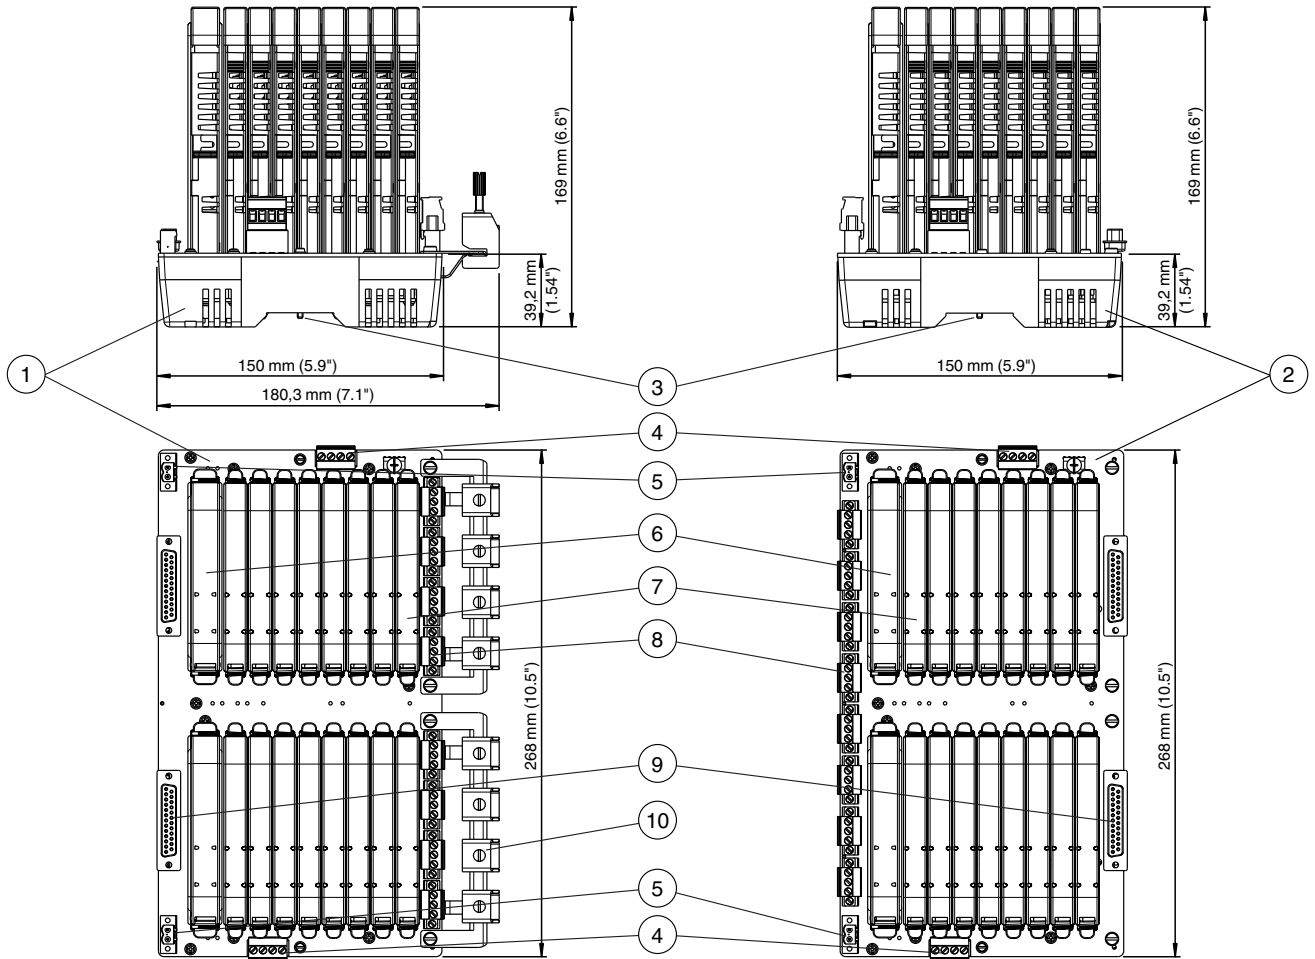

All dimensions in millimeters (mm) and inches (") and without tolerance indication.

Description:

- 1 Motherboard MBHC-FB-8R.HSC*
- 2 Motherboard MBHC-FB-8R.HSC.R*
- 3 Mounting slot for DIN mounting rail
- 4 Connections for alarm volt-free contact and diagnostic bus
- 5 Connections for bulk power supply
- 6 Diagnostic modules
- 7 Power supply modules
- 8 Connections for fieldbus trunk (8 connections per motherboard)
- 9 Connections for host (2 connections per motherboard)
- 10 Screening/earthing kit for trunk cable shields, optional accessory for MBHC-FB-8R.HSC and MBHC-FB-8R.HSC.1

Diagnostic Module Selection

The following diagnostic modules are compatible with this motherboard.

Type code	Description
HD2-DM-B	Diagnostic Module, basic version
HD2-DM-A	Diagnostic Module, advanced version
HD2-DM-A.RO	Diagnostic Module, advanced version, relay output

The stationary and mobile Advanced Diagnostic Module (ADM) and related components provide measurement tools for the fieldbus physical layer. The ADM monitors many quality indicating values of the fieldbus physical layer. An expert system, which is included, analyzes the values and issues easy to understand messages indicating cause and remedy. The ADM is recommended for:

Release date: 2024-11-27 Date of issue: 2024-11-27 Filename: t169722_eng.pdf

- **Faster commissioning and plant start-up:** Installation issues are known and corrected before loop check commences
 - **Reliable operation through online monitoring:** The quality of the physical layer and installation is monitored making fieldbus a manageable asset
 - **Efficient troubleshooting:** An expert system guides the user through issues and faults in the fieldbus installation
- Many other tools are included that enhance fieldbus installation and upkeep. Please see datasheet on HD2-DM-A.

Interface

Connection to FOUNDATION Fieldbus Hosts

Invensys

The motherboard can be connected to Foxboro I/A series with FBM228 host modules using a dedicated system cable. The number of cables required is determined by the number of system connectors on the Power Hub motherboard.

Type code	Description
ACC-MB-HGC.FOX.010	FieldConnex Power Hub system cable for Foxboro FBM228, length 1 m
ACC-MB-HGC.FOX.020	FieldConnex Power Hub system cable for Foxboro FBM228, length 2 m
ACC-MB-HGC.FOX.030	FieldConnex Power Hub system cable for Foxboro FBM228, length 3 m
ACC-MB-HGC.FOX.050	FieldConnex Power Hub system cable for Foxboro FBM228, length 5 m
ACC-MB-HGC.FOX.100	FieldConnex Power Hub system cable for Foxboro FBM228, length 10 m
ACC-MB-HGC.FOX.150	FieldConnex Power Hub system cable for Foxboro FBM228, length 15 m
ACC-MB-HGC.FOX.200	FieldConnex Power Hub system cable for Foxboro FBM228, length 20 m

Honeywell

The motherboard can be connected to Honeywell series C with FIM4/FIM8 host modules using a dedicated system cable. The number of cables required is determined by the number of system connectors on the Power Hub motherboard.

Type code	Description
ACC-MB-HGC.HON.010	FieldConnex Power Hub system cable for Honeywell C300, length 1 m
ACC-MB-HGC.HON.020	FieldConnex Power Hub system cable for Honeywell C300, length 2 m
ACC-MB-HGC.HON.030	FieldConnex Power Hub system cable for Honeywell C300, length 3 m
ACC-MB-HGC.HON.050	FieldConnex Power Hub system cable for Honeywell C300, length 5 m
ACC-MB-HGC.HON.100	FieldConnex Power Hub system cable for Honeywell C300, length 10 m
ACC-MB-HGC.HON.150	FieldConnex Power Hub system cable for Honeywell C300, length 15 m
ACC-MB-HGC.HON.200	FieldConnex Power Hub system cable for Honeywell C300, length 20 m

Additional Information

Accessories

Type code	Description
ACC-MB-HSK	Screening/earthing kit Note: the screening/earthing kit is not available for the version with type code extension ".R"
ACC-MB-HDC	Diagnostic link cable, length 6 cm
ACC-MB-SW	Separation wall for Ex ic hazardous area applications
ACC-MB-CC	2 protective covers for motherboards with screw terminals for Ex ic hazardous area applications Note: protective covers are only required for the version with type code extension ".R"
ACC-MB-CC.1	2 protective covers for motherboards with spring terminals for Ex ic hazardous area applications Note: protective covers are only required for the version with type code extension ".R"

Installation

See manual

Product Versions

Type code	Description
MBHC-FB-8R.HSC	Redundant motherboard with pluggable screw terminals and host system connector (D-sub connector to typical DCS system connection)
MBHC-FB-8R.HSC.1	Redundant motherboard with pluggable spring terminals and host system connector (D-sub connector to typical DCS system connection)

MBHC-FB-8R.HSC.R	Redundant motherboard with pluggable screw terminals and host system connector positioned on the right side (D-sub connector to typical DCS system connection)
MBHC-FB-8R.HSC.R.1	Redundant motherboard with pluggable spring terminals and host system connector positioned on the right side (D-sub connector to typical DCS system connection)