



Terminal Block

USLKG6N

- Accessory Surge Protection
- For equipotential bonding via DIN mounting rail

Terminal block for equipotential bonding

Connection

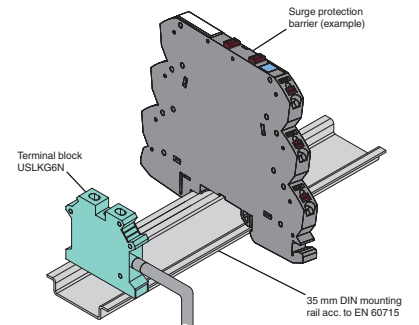

Technical Data

Electrical specifications	
Rated surge voltage	8 kV
Overvoltage category	III
Ambient conditions	
Ambient temperature	-60 ... 105 °C (-76 ... 221 °F)
Storage temperature	-25 ... 60 °C (-13 ... 140 °F)
Pollution degree	3
Mechanical specifications	
Connection	screw terminals
Core cross section	0.2 ... 10 mm ² rated core cross section : max. 6 mm ²
Material	insulating material : Polyamide (PA)
Mass	27 g
Dimensions	6.2 x 42.5 x 45.8 mm (0.32 x 1.7 x 1.8 inch) (W x H x D)
Structure	one-rowed
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001

Release date: 2022-10-19 Date of issue: 2022-10-19 Filename: 131158_eng.pdf