




## Male connector, field-attachable V1S-G-Q3

- Insulation displacement connection
- Plastic locking
- Knurled nut suitable for tool assembly
- cURus approval

Male connector M12 straight A-coded 4-pin, for cable diameter 3.5 - 6 mm, field-attachable, insulation displacement connection



### Dimensions

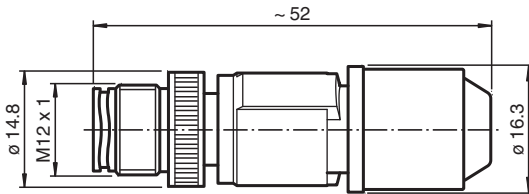

### Technical Data

#### General specifications

Connector 1

Connection	plug
Construction type	M12
Style	straight
Locking	screw connection
Number of pins	4
Coding	A-coded

#### Electrical specifications

Operating voltage	$U_B$	max. 125 V AC/DC
Operating current	$I_B$	max. 4 A
Volume resistance		< 5 m $\Omega$
Insulation resistance		min. 100 M $\Omega$

#### Conformity

Degree of protection	EN 60529
Plug connection	connector M12 x 1 : IEC 61076-2-101

#### Approvals and certificates

UL File Number	E191152
----------------	---------

#### Ambient conditions

Ambient temperature	-25 ... 80 °C (-13 ... 176 °F)
Pollution degree	3

#### Mechanical specifications


Plug connector	
Tightening torque	0.4 Nm

Release date: 2025-01-30 Date of issue: 2025-01-30 Filename: 134143\_eng.pdf

## Technical Data

Tool installation	straight knurling
Mating cycles	min. 100
Degree of protection	IP65 / IP67
Connection	Insulation displacement connection for 0.14 ... 0.34 mm <sup>2</sup> / AWG 26 ... AWG 22
Cable	
Sheath diameter	3.5 ... 6 mm
Cores	Ø 0.7 ... 1.6 mm incl. insulation Cross-section: 0.14 ... 0.34 mm <sup>2</sup> Cable construction: Class 2-6 in accordance with VDE 0295
Core cross section	0.34 mm <sup>2</sup> / 22 AWG max.
Mass	11.2 g
Mounting	max. tightening torque on the coupling nut: ≤ 1.2 Nm
Note	max. 10 connections possible to a cable of the same cross-section. After repeated cable connection it may be necessary to renew the seal and cap.
<b>Material</b>	
Plug connector	
Screw connection	Plastic
Body	PA 66, black
Contact surface	Ni/Au
Flammability	V-0
Cable	
Core insulation	PVC/PE/PP

## Connection Assignment



## Connection

