



Insulation spacer for universal power rail

UPR-I


- Electrical insulation of segmented Power Rail inserts
- Suitable for Power Rail UPR-**-*
- Suitable for profile rail K-DUCT
- Packaging unit: 10 pieces

Insulation spacer for universal power rail UPR-**-*


Function

The insulation spacer mounts onto a 35 mm DIN rail. It is used for electrical insulation of segmented Power Rail inserts.

Assembly

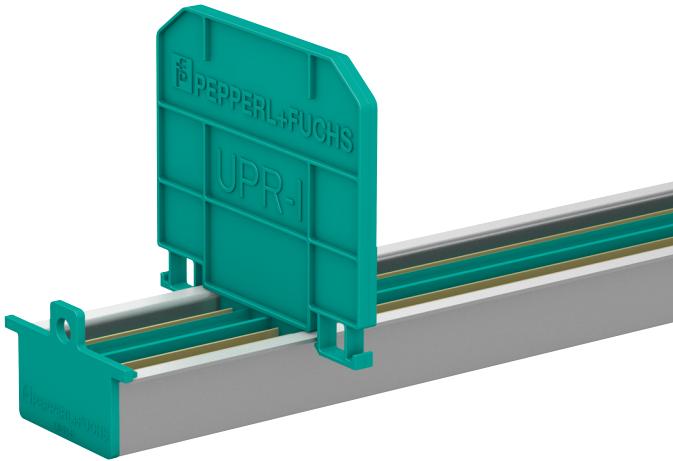

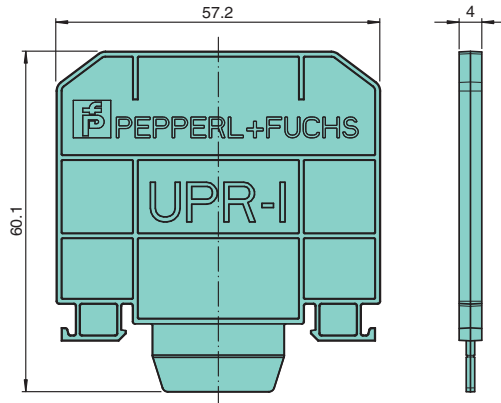


Dimensions



Technical Data

Ambient conditions	
Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications	
Material	Polycarbonate
Mass	approx. 20 g
Dimensions	4 x 57 x 60 mm (0.16 x 2.24 x 2.36 inch)
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
General information	
Packing unit	10 pieces

Accessories

	UPR-MR	35 mm DIN mounting rail, length: 2 m (packaging unit: 2 pieces)
	UPR-E	End cap for universal power rail UPR-**-*
	UPR-COVER	Cover for 35 mm DIN mounting rail