


Sensor module

AIR17-S Slave




- Sensor module for configurable TopScan-S
- Slave module
- Category 2, tested and certified to DIN 18650/EN 16005
- Safe function even on difficult floors
- Easy adjustment of transmitter for hinge side/ opposite hinge side

Replacement/extension sensor module



Dimensions

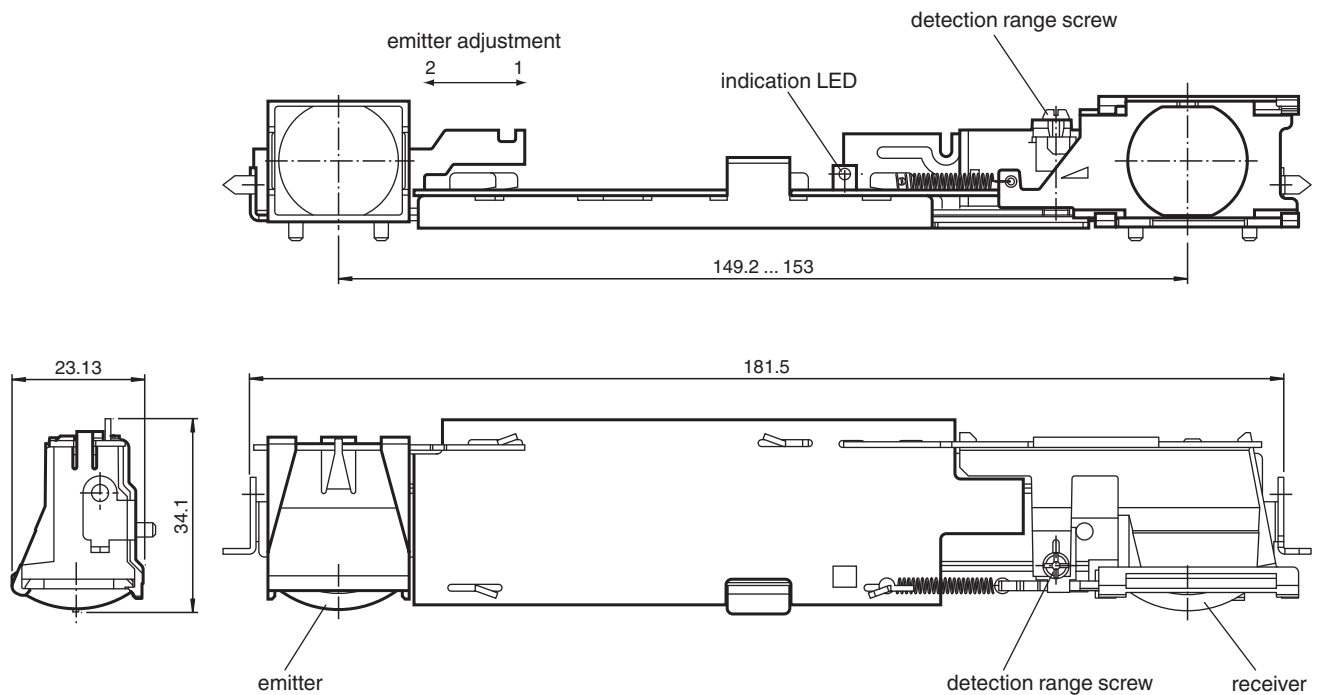

Technical Data

General specifications


Detection range min.	0 ... 1500 mm
Detection range max.	0 ... 2500 mm

Release date: 2022-07-15 Date of issue: 2022-07-15 Filename: 208178_eng.pdf

Technical Data

Light source	IRED	
Light type	modulated infrared light	
Black-white difference (6 %/90 %)	< 2 % at 2000 mm sensor range	
Operating mode	Background evaluation	
Diameter of the light spot	1.1 cm x 8.3 cm at 2000 mm sensor range	
Functional safety related parameters		
MTTF _d	880 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	90 %	
Indicators/operating means		
Function indicator	LED red/green	
Control elements	Sensing range adjuster	
Electrical specifications		
Operating voltage	U _B	24 V DC +/- 20 %
No-load supply current	I ₀	65 mA
Output		
Response time	≤ 70 ms	
Approvals and certificates		
CCC approval	CCC approval / marking not required for products rated ≤36 V	
Ambient conditions		
Ambient temperature	-10 ... 50 °C (14 ... 122 °F)	
Mechanical specifications		
Mounting height	max. 2500 mm	

Assembly

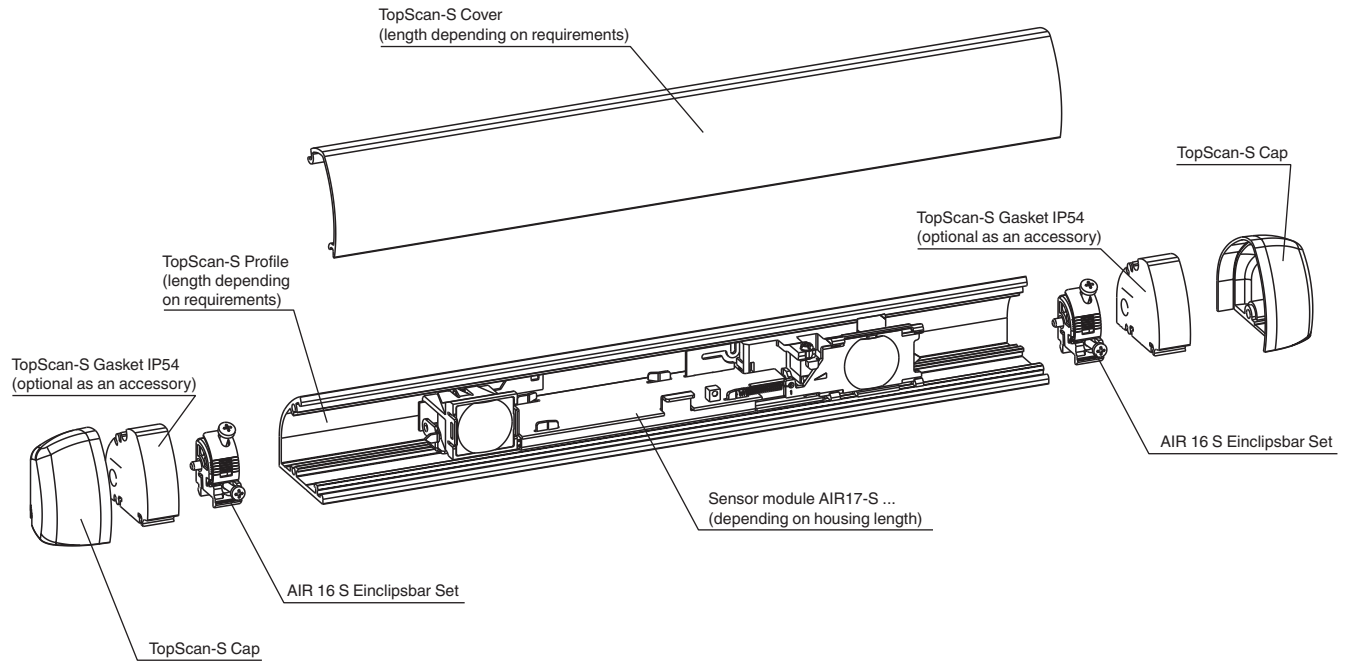

Release date: 2022-07-15 Date of issue: 2022-07-15 Filename: 208178_eng.pdf