


Activator BT32XAS

- Two fixed operating surfaces offset by 180°
- Action reversed (end position undamped)
- Finger protection

Activator for F25 series

Dimensions

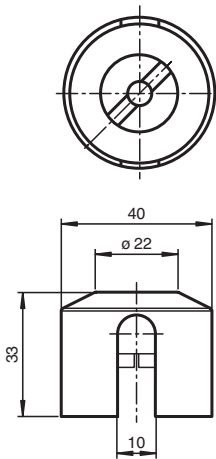

Technical Data

General specifications	
Ring diameter	max. 40 mm
Spring ring height	max. 6 mm
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications	
Shaft diameter	< 31 mm
Shaft height	20 mm
Mounting hole pattern	30 x 80 mm
Material	
Housing	1.4057
Stopper cap	PBT (1 unit black)
Mounting screw	Stainless steel 1.4305 / AISI 303
Mass	200 g
Tightening torque, fastening screws	≤ 1.5 Nm

Release date: 2025-02-25 Date of issue: 2025-02-25 Filename: 212364_eng.pdf