




Dimensions

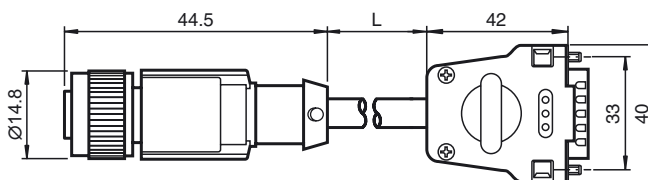

Model Number

V19-G-5M-PUR-ABG-SUBD15
 Connection cable, M12 to SUB-D, PUR cable 8-pin

Features

- M12 to Sub-D adapter

Technical data

General specifications

Number of pins	8
----------------	---

Electrical specifications

Operating voltage	U _B	max. 30 V AC/DC
Operating current	I _B	max. 2 A


Ambient conditions

Ambient temperature	Body: -25 ... 90 °C (-13 ... 194 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
---------------------	--

Mechanical specifications

Material	
Contacts	CuSn
Contact surface	Au
Body	TPU, green
Cable	PUR
Slotted nut	Diecast zinc
Core insulation	PP
Cable	extra-fine wire, flexible
Sheath diameter	Ø 5.9 mm
Bending radius	> 10 x cable diameter, moving > 8 x cable diameter, fixed
Color	black
Cores	8 x 0.25 mm ²
Conductor construction	32 x 0.1 mm Ø
Shield	grid covering 85 %
Length	L 5 m

Electrical connection

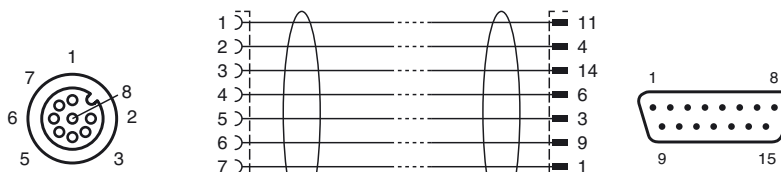

ase date: 2017-03-30 09:39 Date of issue: 2017-03-30 223360_eng.xml