


HART Termination Board

FI-PFH-TR-AI-370X-GP




- System board for Schneider Electric, Tricon series by Triconex
- TAN48 approval
- HART Termination Board (ETP) for Tricon v10 AI module
- For 16-channel AI cards 3700, 3700A, 3703E and 3721
- 16-channel
- Field side: pluggable screw terminals, green
- Control side: ELCO socket, 56-pin

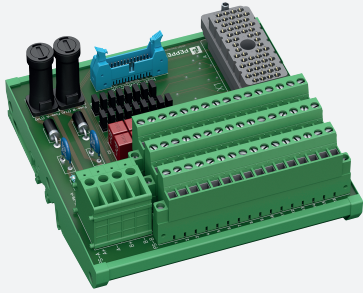

Function

The function of the HART Termination Board as well as the connector pin assignment exactly fit the requirement of Triconex systems. The HART termination board has pluggable screw terminals to connect HART field devices. The 26-pin flat cable K-HM26 is used for connection of each HART Multiplexers KFD*-HM*-16 to the termination board. The design permits the fast and reliable installation in the system cabinet.

Connection

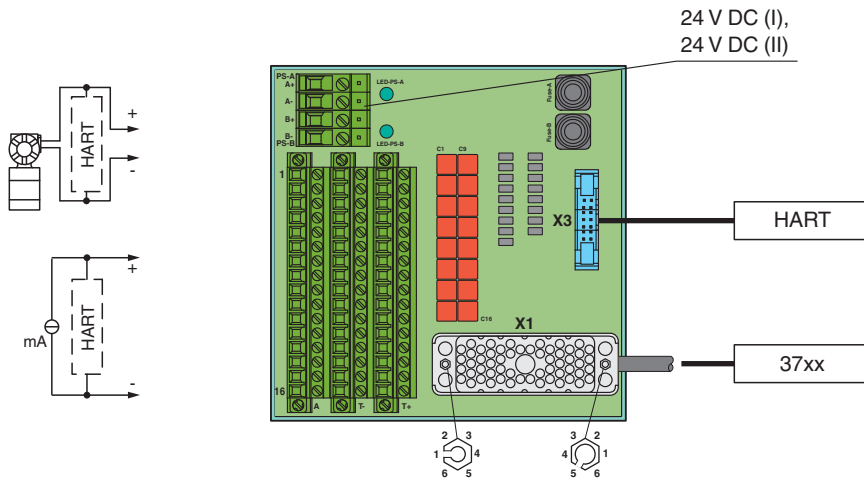

Zone 2

Technical Data

Supply	
Rated voltage	U_r 20.4 ... 27.6 V DC SELV/PELV
Voltage drop	0.9 V , voltage drop across the series diode on the termination board must be considered
Ripple	max. 10 %
Fusing	1 A
Power dissipation	≤ 500 mW
Reverse polarity protection	yes
Interface	
Type	multiplexer connection : IDC plug, 26-pin
Redundancy	
Supply	Redundancy available. The supply is decoupled, monitored and fused.

Release date: 2023-07-04 Date of issue: 2023-07-04 Filename: 226188_eng.pdf



Technical Data

Signal lines		
Rated current	I_B	max. 30 mA per channel
Indicators/settings		
Display elements		- LED PS-A (Termination Board power supply), green LED - LED PS-B (Termination Board power supply), green LED
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2017 For further information see system description.
Degree of protection		IEC 60529:2001
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Ambient conditions		
Ambient temperature		0 ... 50 °C (32 ... 122 °F)
Storage temperature		-15 ... 50 °C (5 ... 122 °F)
Relative humidity		≤ 93 % non-condensing
Shock resistance		15 g , 11 ms
Vibration resistance		1 g , 10 ... 150 Hz
Mechanical specifications		
Degree of protection		IP20
Connection		
Field side		pluggable screw terminals , green
Control side		ELCO socket, 56-pin HART : 1 x IDC plug, 26-pin
Supply		screw terminals , green
Core cross section		0.5 ... 2.5 mm ² (20 ... 12 AWG)
Material		
Housing		PVC
Mass		approx. 415 g
Dimensions		126 x 123 x 59 mm (5.0 x 4.9 x 2.3 inch) (W x H x D)
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
Certificate		PF 11 CERT 1931 X
Marking		⊕ II 3G Ex nA IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 , EN 60079-15:2010
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .



Safety Information

We recommend that you do not connect the device supply to a DC supply network.
If you connect the device supply to a DC supply network, make sure that appropriate protective measures are implemented to ensure that no transient overvoltages occur.


Matching System Components

	KFD0-HMS-16	HART Multiplexer Slave
	KFD2-HMM-16	HART Multiplexer Master

Accessories

	K-HM26-114025	HART connection cable for master/slave - termination board connection
	K-HM14	HART connection cable for master - slave connection


Connection Assignment

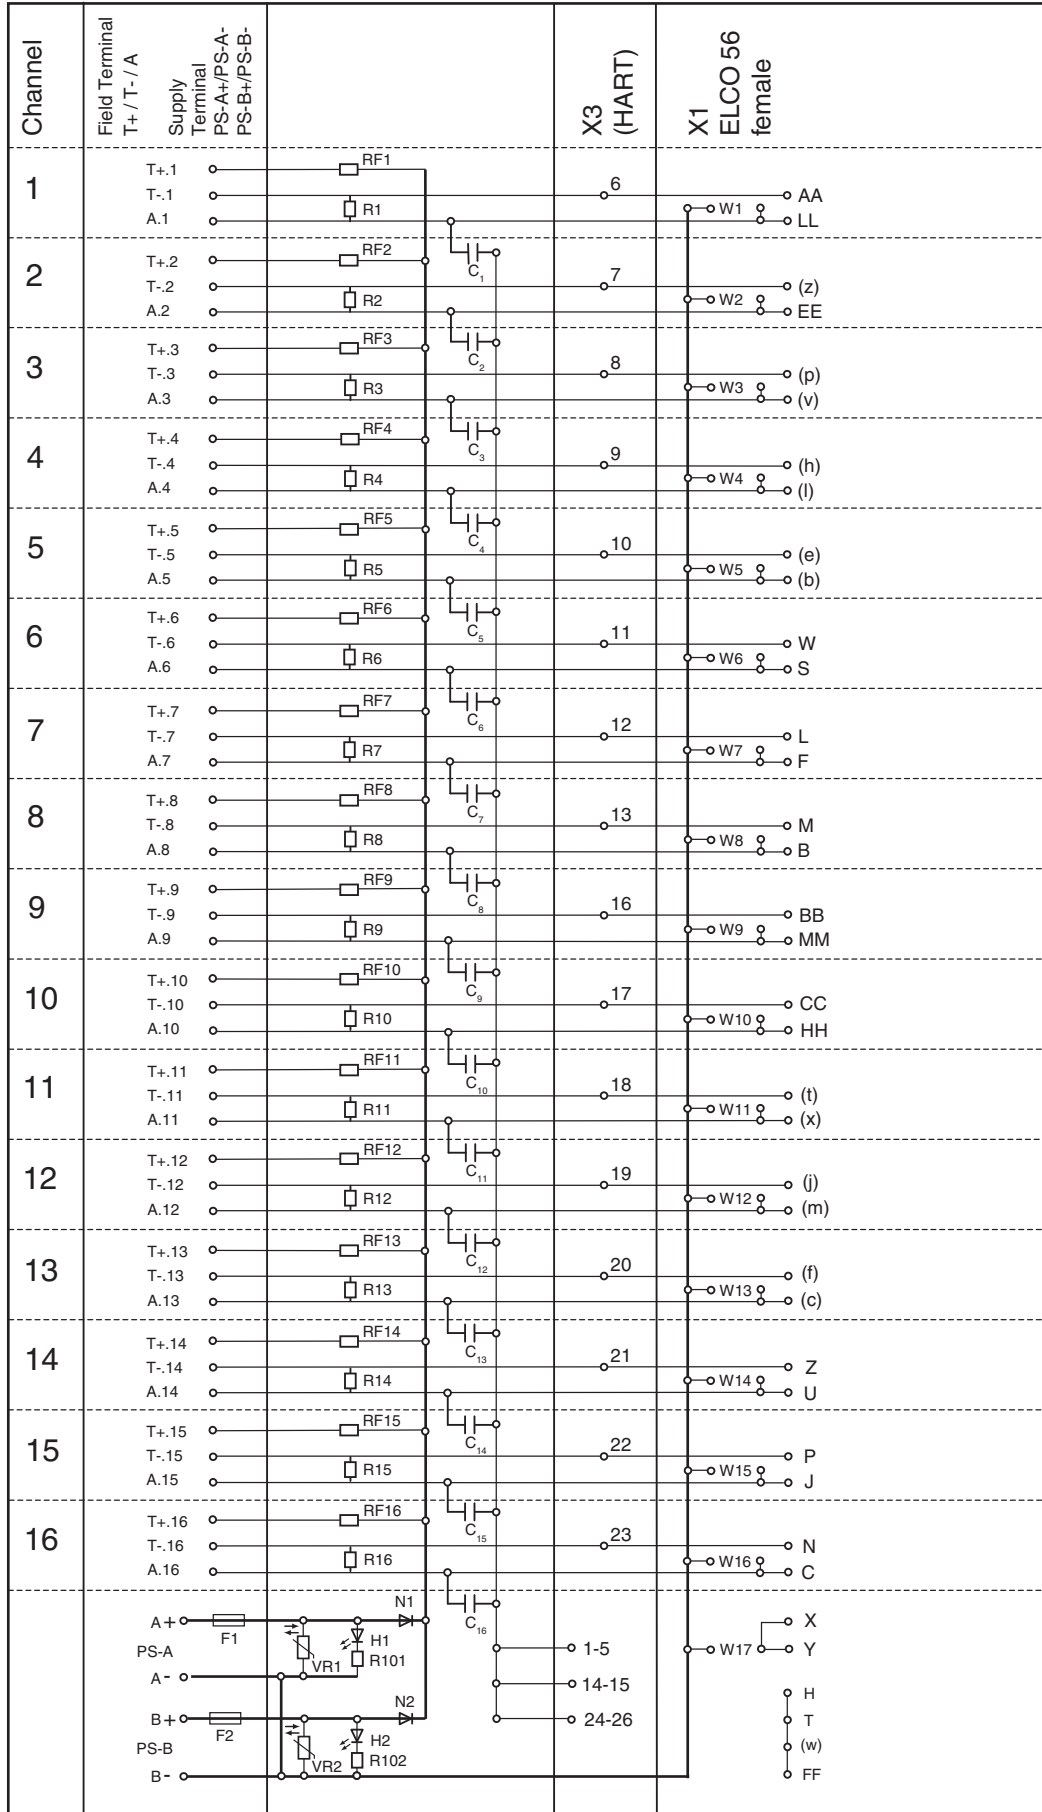

Release date: 2023-07-04 Date of issue: 2023-07-04 Filename: 226188_eng.pdf


Application

Typical loop: 2-wire HART transmitter input

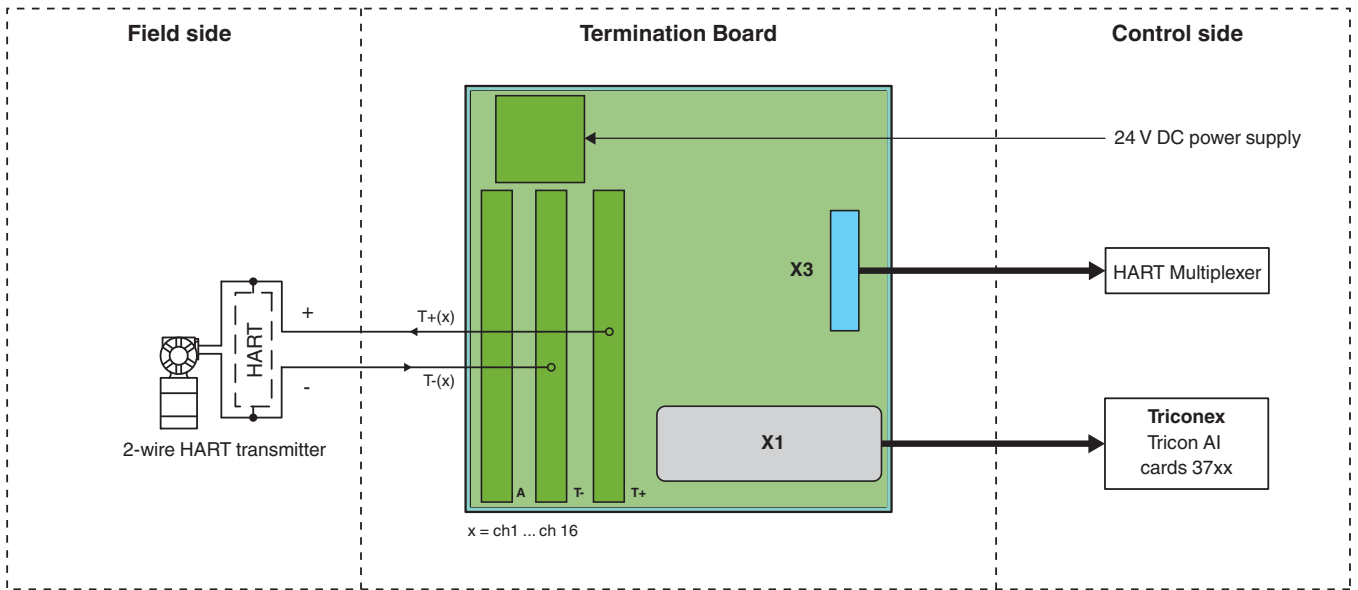

Always insert jumper W1 ... W16, W17.

Typical loop: HART current source

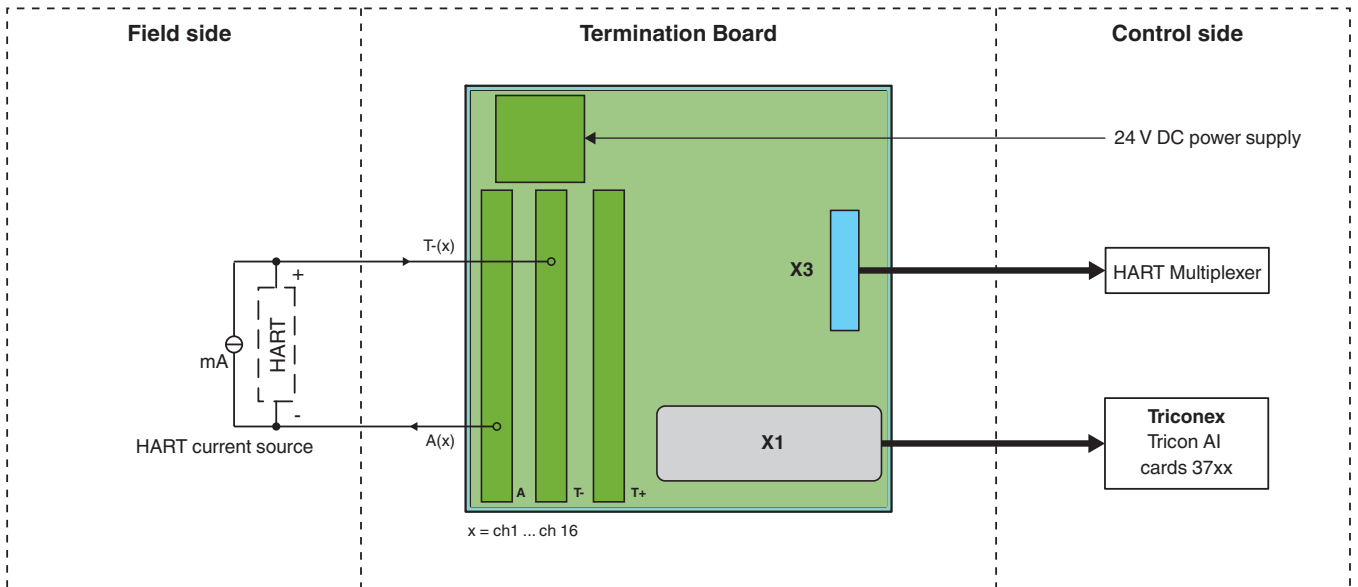

Common mode: insert jumper W1 ... W16, W17.
 Differential mode: remove jumper W1 ... W16, W17.

Release date: 2023-07-04 Date of issue: 2023-07-04 Filename: 226188_eng.pdf