



Model Number


V1S-GV4A

Field-attachable male connector

Features

- Screw terminal connection
- Stainless steel locking
- Gold plated contacts

Dimensions

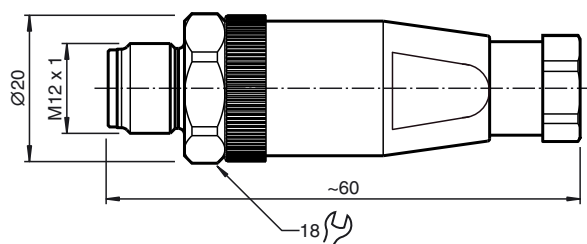

Technical data

General specifications

Number of pins	4
UL File Number	E363587

Electrical specifications

Operating voltage	U_B	max. 250 V AC/DC
Operating current	I_B	max. 4 A
Volume resistance		< 3 m Ω

Ambient conditions

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Pollution Degree	3

Mechanical specifications

Degree of protection	IP67
Connection	1 x M12 connector, straight Screw terminals for max. 0.75 mm ²

Material

Contacts	CuZn
Contact surface	Au
Body	PA

Cable

Sheath diameter	4 ... 6 mm
-----------------	------------

Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000

Electrical connection

