



Rotation Speed Monitor

KFD2-DWB-Ex1.D

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Dry contact or NAMUR inputs
- Input frequency 1 mHz ... 5 kHz
- 2 relay contact outputs
- Start-up override
- Configurable by keypad
- Line fault detection (LFD)
- Up to SIL 2 acc. to IEC/EN 61508 / IEC/EN 61511





SIL 2



Function

This isolated barrier is used for intrinsic safety applications. It monitors for an overspeed or underspeed condition of a digital signal (NAMUR sensor/ mechanical contact) from a hazardous area by comparing the input frequency to the user programmed reference frequency. An overspeed or underspeed condition is signaled via the relay outputs. Line fault detection of the field circuit is indicated by a red LED, Power Rail and relay. The start-up override feature sets relay outputs to default conditions programmed by the user for up to 1,000 seconds. The unit is easily programmed by the use of a keypad located on the front of the unit. A unique collective error messaging feature is available when used with the Power Rail system. For additional information, refer to the manual and www.pepperl-fuchs.com.

Connection

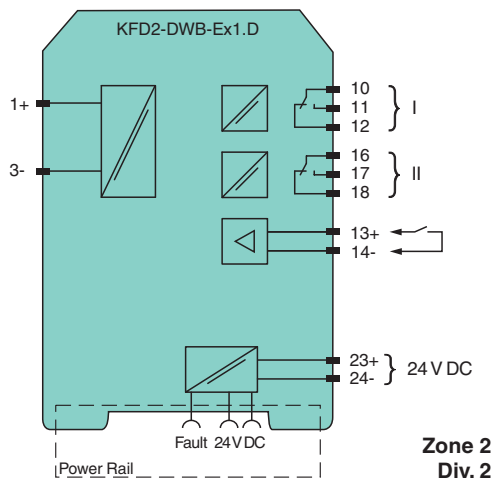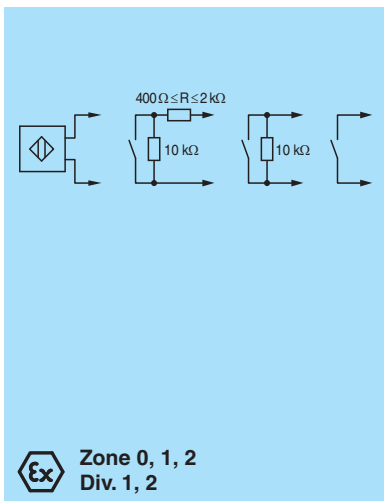

Technical Data

General specifications	
Signal type	Digital Input
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 2
Supply	
Connection	terminals 23+, 24- or power feed module/Power Rail
Rated voltage	U_r 20 ... 30 V DC
Rated current	I_r approx. 100 mA
Power dissipation/power consumption	≤ 1.8 W / 1.8 W
Input	

Release date: 2023-03-21 Date of issue: 2023-03-21 Filename: 231203_eng.pdf


Technical Data

Connection side		field side
Connection		Input I: intrinsically safe: terminals 1+, 3- Input II: non-intrinsically safe: terminals 13+, 14-
Input I		acc. to EN 60947-5-6 (NAMUR), see manual for electrical data
Pulse duration		> 50 μ s
Input frequency		0.001 ... 5000 Hz
Line fault detection		breakage I \leq 0.15 mA; short-circuit I > 6.5 mA
Input II		startup override: 1 ... 1000 s, adjustable in steps of 1 s
Active/Passive		I > 4 mA (for min. 100 ms) / I < 1.5 mA
Open circuit voltage/short-circuit current		18 V / 5 mA
Output		
Connection side		control side
Connection		output I: terminals 10, 11, 12 output II: terminals 16, 17, 18
Output I, II		signal, relay
Contact loading		253 V AC / 2 A / $\cos \phi \geq 0.7$; 40 V DC / 2 A
Mechanical life		5 x 10 ⁷ switching cycles
Energized/De-energized delay		approx. 20 ms / approx. 20 ms
Collective error message		Power Rail
Transfer characteristics		
Input I		
Measurement range		0.001 ... 5000 Hz
Resolution		0.1 % of measured value , \geq 0.001 Hz
Accuracy		0.1 % of measured value , > 0.001 Hz
Measuring time		< 100 ms
Influence of ambient temperature		0.003 %/K (30 ppm)
Output I, II		
Response delay		\leq 200 ms
Galvanic isolation		
Input I/other circuits		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output I, II against each other		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output I, II/other circuits		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Start-up override/power supply and collective error		functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}
Indicators/settings		
Display elements		LEDs , display
Control elements		Control panel
Configuration		via operating buttons
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
Conformity		
Electromagnetic compatibility		NE 21:2006
Degree of protection		IEC 60529:2001
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		300 g
Dimensions		40 x 119 x 115 mm (1.6 x 4.7 x 4.5 inch) (W x H x D) , housing type C2

Technical Data

Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001	
Data for application in connection with hazardous areas		
EU-type examination certificate	TÜV 99 ATEX 1408	
Marking	Ⓜ II (1)G [Ex ia Ga] IIC Ⓜ II (1)D [Ex ia Da] IIIC Ⓜ I (M1) [Ex ia Ma] I	
Supply		
Maximum safe voltage	U_m	40 V DC (Attention! U_m is no rated voltage.)
Input I	terminals 1+, 3-: Ex ia	
Voltage U_o	10.1 V	
Current I_o	13.5 mA	
Power P_o	34 mW (linear characteristic)	
Input II	terminals 13+, 14- non-intrinsically safe	
Maximum safe voltage U_m	40 V (Attention! The rated voltage can be lower.)	
Output I, II	terminals 10, 11, 12; 16, 17, 18 non-intrinsically safe	
Maximum safe voltage	U_m	253 V (Attention! The rated voltage can be lower.)
Contact loading	253 V AC/2 A/cos $\phi > 0.7$; 40 V DC/2 A resistive load	
Certificate	TÜV 02 ATEX 1885 X	
Marking	Ⓜ II 3G Ex nA nC IIC T4 Gc	
Output I, II		
Contact loading	50 V AC/2 A/cos $\phi > 0.7$; 40 V DC/2 A resistive load	
Galvanic isolation		
Input I/other circuits	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V	
Directive conformity		
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010	
International approvals		
FM approval		
Control drawing	16-538FM-12	
UL approval	E223772	
IECEX approval		
IECEX certificate	IECEX TUN 03.0000 IECEX TSA 18.0007X	
IECEX marking	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I Ex ec nC IIC T4 Gc	
General information		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .	

Assembly

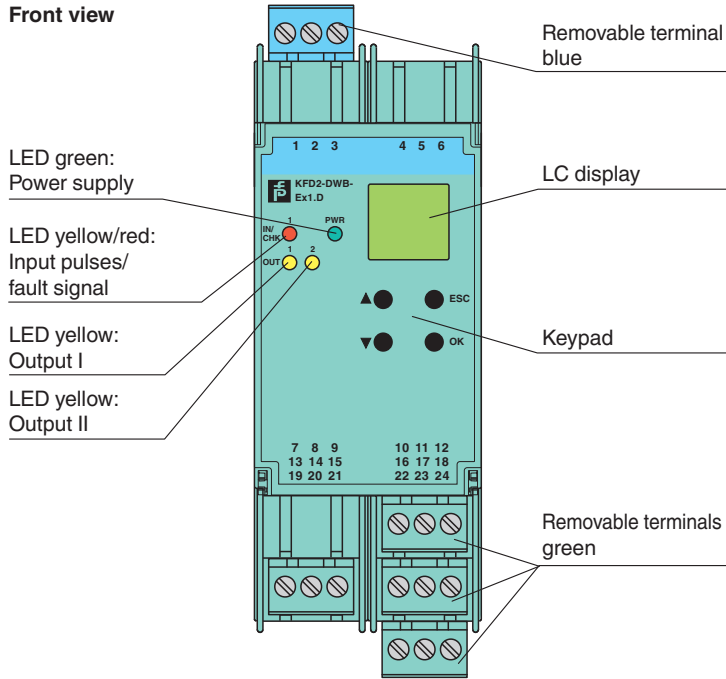

Matching System Components

	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue


Accessories

	F-NR3-Ex1	NAMUR Resistor Network
	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6

Release date: 2023-03-21 Date of issue: 2023-03-21 Filename: 231203_eng.pdf

Characteristic Curve

Maximum Switching Power of Output Contacts

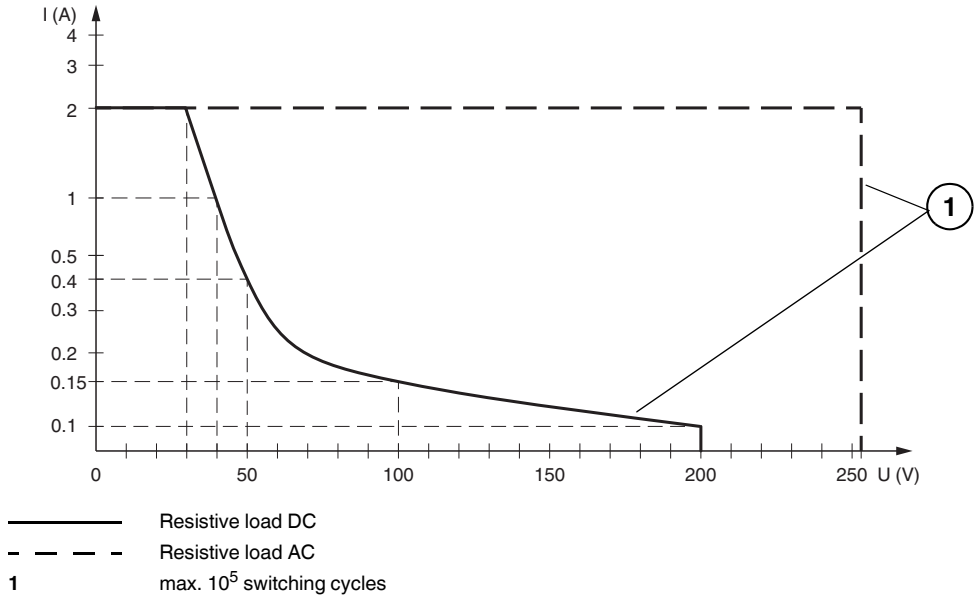

Release date: 2023-03-21 Date of issue: 2023-03-21 Filename: 231203_eng.pdf