



Surge Protection Barrier

M-LB-1.275.D


- Surge protection for 1 supply line
- Type 2 acc. to EN 61643-11
- For 230 V
- Pre-wired unit
- Operating state and fault indication of every protected line
- Fault indication output
- DIN rail mountable




Function

This device is a modular surge protection barrier (type 2 acc. to EN 61643-11) with error message output (floating changeover contact). The complete device consists of a base module and plug-in protection modules and is ready for installation. Every protection module is locked in the base module and can be changed without tools via release buttons.

Connection

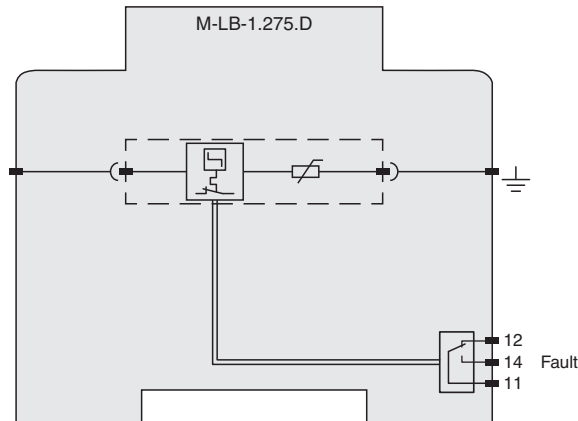

Dimensions

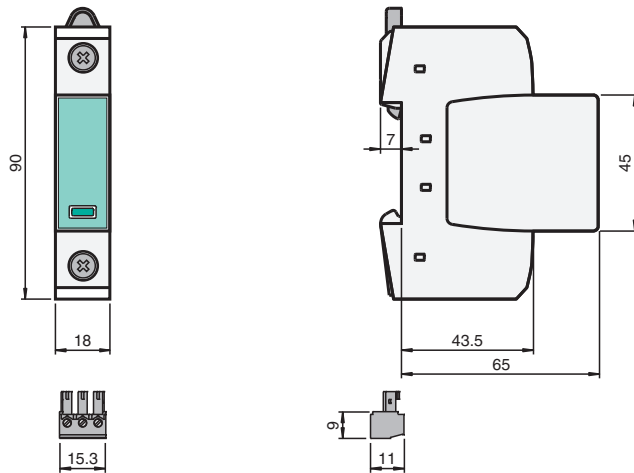

Technical Data

General specifications		
Device type	type 2 acc. to EN 61643-11 class II acc. to IEC 61643-1	
Number of protected supply lines	1	
Suitable components	protection module M-LB-1.275.M	
Electrical specifications		
Nominal voltage	230 V AC, 50 ... 60 Hz	
Maximum continuous operating voltage	U_c	275 V AC, 50 ... 60 Hz 350 V DC
Temporary over-voltage	U_t	335 V / 5 s (TOV withstand)
Nominal discharge current (8/20 μ s)	I_n	20 kA
Max. surge current (8/20 μ s)	I_{max}	40 kA
Voltage protection level	U_p	max. 1.25 kV max. 1 kV at 5 kA
Reaction time	t_A	max. 25 ns
Short-circuit-proof	50 kA _{eff}	
Overcurrent protection	max. 125 A gG , mains-side	
Fault indication output		
Connection	terminals 11, 12, 14	
Output	volt-free change-over contact	
Switch power	AC: 250 V / 0.5 A DC: 250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A; 24 V/0.5 A	
Indicators/settings		
Display elements	status display operating state (green) fault indication (red)	
Directive conformity		
Low voltage		
Directive 2014/35/EU	EN 61643-11:2012	
Conformity		
Degree of protection	IEC 60529	
Shock resistance	EN 60068-2	
Vibration resistance	EN 60068-2	
Ambient conditions		
Ambient temperature	-40 ... 80 °C (-40 ... 176 °F)	
Relative humidity	5 ... 95 %	
Mechanical specifications		
Degree of protection	IP20	

Release date: 2022-01-13 Date of issue: 2022-01-13 Filename: 235691_eng.pdf

Technical Data

Core cross section	- min. 1.5 mm ² solid/flexible - max. 35 mm ² stranded/25 mm ² flexible - max. 1.5 mm ² solid/flexible (for remote signalling contact)
Material	
Housing	thermoplastic, color grey , UL 94 V-0
Mass	approx. 240 g
Dimensions	18 x 90 x 72 mm (0.7 x 3.6 x 2.8 inch) (W x H x D) , 1 TE acc. to DIN 43880
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

