




## Capacitive sensor CBB8-18GS75-E2

- 8 mm flush
- The switching distance can be set over a wide range with the potentiometer



### Dimensions

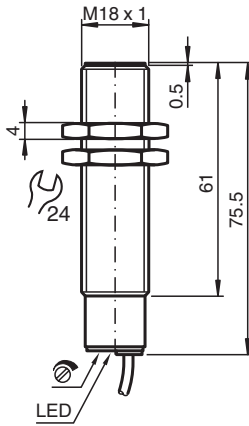

### Technical Data

#### General specifications

Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	$s_n$	1 ... 8 mm
Installation		flush
Output polarity		DC
Output type		3-wire

#### Nominal ratings


Installation conditions		
A		0 mm
B		0 mm
C		16 mm
F		36 mm
Operating voltage	$U_B$	10 ... 30 V
Switching frequency	$f$	0 ... 100 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	$U_d$	$\leq 1.5$ V

Release date: 2025-04-02 Date of issue: 2025-04-02 Filename: 237036\_eng.pdf


## Technical Data

Temperature drift		max. 20 % at -5 ... 55 °C (23 ... 131 °F)
Operating current	$I_L$	0 ... 100 mA
No-load supply current	$I_0$	≤ 18 mA
Time delay before availability	$t_v$	max. 300 ms
<b>Functional safety related parameters</b>		
MTTF <sub>d</sub>		343 a
Mission Time (T <sub>M</sub> )		20 a
Diagnostic Coverage (DC)		0 %
<b>Indicators/operating means</b>		
LED green		Operating display
LED yellow		indication switching state
Potentiometer		sensitivity adjustment
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards		EN IEC 60947-5-2
<b>Approvals and certificates</b>		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
<b>Ambient conditions</b>		
Ambient temperature		-25 ... 85 °C (-13 ... 185 °F)
<b>Mechanical specifications</b>		
Connection type		cable
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		PBT
Degree of protection		IP67
Cable		
Wire end ferrules		yes
Material		PUR
Color		black
Number of cores		3
Core cross section		0.34 mm <sup>2</sup>
Length	L	2 m
Dimensions		
Length		75 mm
Diameter		18 mm

## Connection



**Installation Conditions**

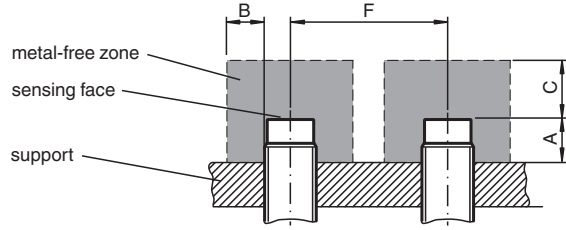

Release date: 2025-04-02 Date of issue: 2025-04-02 Filename: 237036\_eng.pdf