


Adapter M12 x 1 on Sub-D


V15S-G-0,5M-PUR-ABG-SUBD9

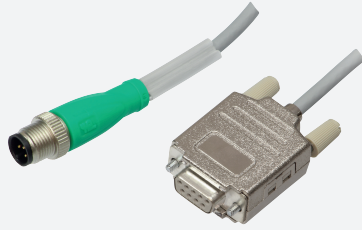

- Immunity to vibration, with mechanical latching
- Shield attached to coupling nut

Adapter, M12 x 1, to sub-D, 9-pin

Dimensions

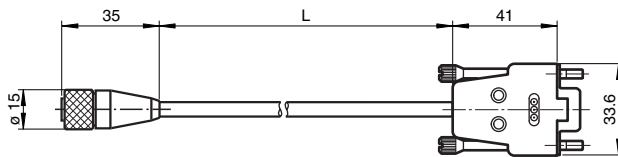

Technical Data

General specifications

Number of pins	5 + shield
Connection 1	plug
Construction type 1	straight
Threading 1	M12
Connection 2	socket
Construction type 2	straight
Threading 2	Sub-D

Electrical specifications

Operating voltage	U_B	max. 36 V DC
Operating current	I_B	max. 1.5 A
Volume resistance		< 30 m Ω

Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
---------------------	--------------------------------

Mechanical specifications

Pin diameter	1 mm
Degree of protection	IP20

Release date: 2021-09-29 Date of issue: 2021-09-29 Filename: 238748_eng.pdf

Technical Data

Material		
Contacts		CuZn
Contact surface		Au
Body		TPU
Cable		PUR
Slotted nut		Diecast zinc
Cable		fine-strand, flexible
Color		black
Cores		5 x 0.34 mm ²
Length	L	0.5 m
Mass		approx. 221 g

Connection

