



## Universal Input/Output (HART) FB7304B3

- 4-channel
- Inputs with plug-in Ex e terminals
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Analog input, digital input, analog output, digital output
- Supply circuit 21.5 V (4 mA)
- HART communication via field bus or service bus
- Simulation mode for service operations (forcing)
- Line fault detection (LFD): one LED per channel
- Permanently self-monitoring



### Function

The device is a configurable universal module. Each channel can operate in the following modes:


- As an analog input (AI) it feeds 2-wire transmitters.
- As an analog output (AO) it can drive proportional valves, I/P converters, or local indicators.
- As a digital input (DI) it reads dry contacts.
- As a digital output (DO) it can drive solenoids, sounders, or LED.

A combination of analog and digital I/O is possible.

Channel LEDs indicate the status of each channel. White LEDs indicate whether AI, AO, DI, DO are selected.

The intrinsically safe signals are galvanically isolated from the bus and the power supply.

### Connection

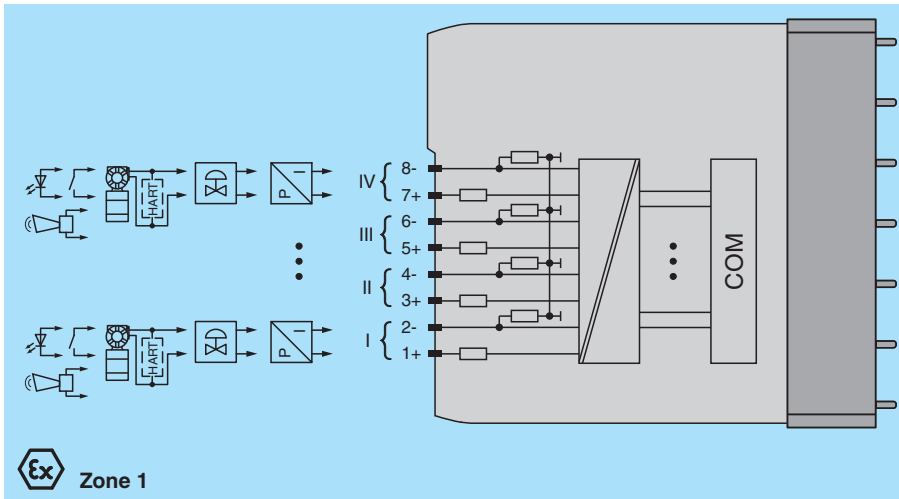

### Technical Data

Slots	
Occupied slots	1
Supply	
Connection	backplane bus
Rated voltage	$U_r$ 12 V DC , only in connection with the power supplies FB92**
Power dissipation	2 W
Power consumption	3 W
Internal bus	
Connection	backplane bus

Release date: 2022-08-11 Date of issue: 2022-08-11 Filename: 239065\_eng.pdf

**Technical Data**

Interface	manufacturer-specific bus to standard com unit
<b>Analog input</b>	
Number of channels	4
Suitable field devices	
Field device	pressure converter
Field device [2]	flow converter
Field device [3]	level converter
Field device [4]	Temperature Converter
Field device interface	
Connection	2-wire transmitter
Connection	terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-
Transmitter supply voltage	min. 15 V at 20 mA ; 21.5 V at 4 mA
Input resistance	15 Ω
Line fault detection	can be switched on/off for each channel via configuration tool , configurable via configuration tool
Short-circuit	factory setting: > 21 mA Can be parameterized in the range 0 ... 22 mA
Open-circuit	factory setting: < 3.6 mA Can be parameterized in the range 0 ... 22 mA
HART communication	yes
HART secondary variable	yes
<b>Analog output</b>	
Number of channels	4
Suitable field devices	
Field device	Proportional Valve
Field device [2]	I/P converters
Field device [3]	on-site display
Connection	terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-
Current	0 ... 20 mA short-circuit protected
Line fault detection	can be switched on/off for each channel via configuration tool , configurable via configuration tool
Short-circuit	factory setting: < 50 Ω configurable between 0 ... 26 mA
Open-circuit	deviation of preset output value > 0.5 mA
Load	max. 750 Ω at 20 mA
HART communication	yes
HART secondary variable	yes
Watchdog	output off 0.5 s after serious fault
<b>Digital input</b>	
Number of channels	4
Sensor interface	
Connection [2]	volt-free contact
Connection	terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-
Line fault detection	can be switched on/off for each channel via configuration tool
Connection	mechanical switch with additional resistors (see connection diagram)
Short-circuit	> 7 mA
Open-circuit	< 0.1 mA
Digital signals (active)	
Switching point: ON	> 2.1 mA
Switching point: OFF	< 1.2 mA
<b>Digital output</b>	
Number of channels	4
Suitable field devices	
Field device	Solenoid Valve
Field device [2]	audible alarm
Field device [3]	visual alarm
Connection	terminals 1+, 2-, 3+, 4-, 5+, 6-, 7+, 8-

Release date: 2022-08-11 Date of issue: 2022-08-11 Filename: 239065\_eng.pdf

**Technical Data**

Drive capability		12 V / 22 mA
Internal resistor	R <sub>i</sub>	385 Ω
Current limit	I <sub>max</sub>	22 mA
Open loop voltage	U <sub>s</sub>	min. 22.7 V
Line fault detection		can be switched on/off for each channel via configuration tool
Test current		0.4 mA
Short-circuit		< 50 Ω
Open-circuit		< 0.2 mA
<b>Transfer characteristics</b>		
Deviation		
After calibration		0.1 % of the signal range at 20 °C (68 °F)
Influence of ambient temperature		0.1 %/10 K of the signal range
Resolution		12 Bit (0 ... 26 mA)
Refresh time		approx. 100 ms (4 channels)
<b>Indicators/settings</b>		
LED indication		Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (1-4) red: line fault (lead breakage or short circuit) , yellow: state of digital I/O (0/1) Configuration LED (AI, AO, DI, DO) white: selected channel mode
Coding		optional mechanical coding via front socket
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2007
Degree of protection		IEC 60529
Environmental test		EN 60068-2-14
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Damaging gas		EN 60068-2-42
Relative humidity		EN 60068-2-78
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)
Relative humidity		95 % non-condensing
Shock resistance		shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance		frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance
Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>		
Degree of protection		IP20 (module) , a separate housing is required acc. to the system description
Connection		removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm <sup>2</sup> ) or screw terminals (0.08 ... 1.5 mm <sup>2</sup> )
Mass		approx. 425 g
Dimensions		28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch)
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		FIDI 21 ATEX 0013 U
Marking		Ⓔ II 2G Ex db eb q IIC Gb
Galvanic isolation		
Input/power supply, internal bus		safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V


Release date: 2022-08-11 Date of issue: 2022-08-11 Filename: 239065\_eng.pdf

**Technical Data**

<b>Directive conformity</b>	
Directive 2014/34/EU	EN 60079-0:2018 EN 60079-1:2014 EN 60079-5:2015 EN 60079-7:2015+A1:2018
<b>International approvals</b>	
ATEX approval	FIDI 21 ATEX 0013 U
IECEX approval	
IECEX certificate	IECEX FIDI 21.0003U
IECEX marking	Ex db eb q IIC Gb
<b>General information</b>	
System information	The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate.
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Assembly**

**Front view**

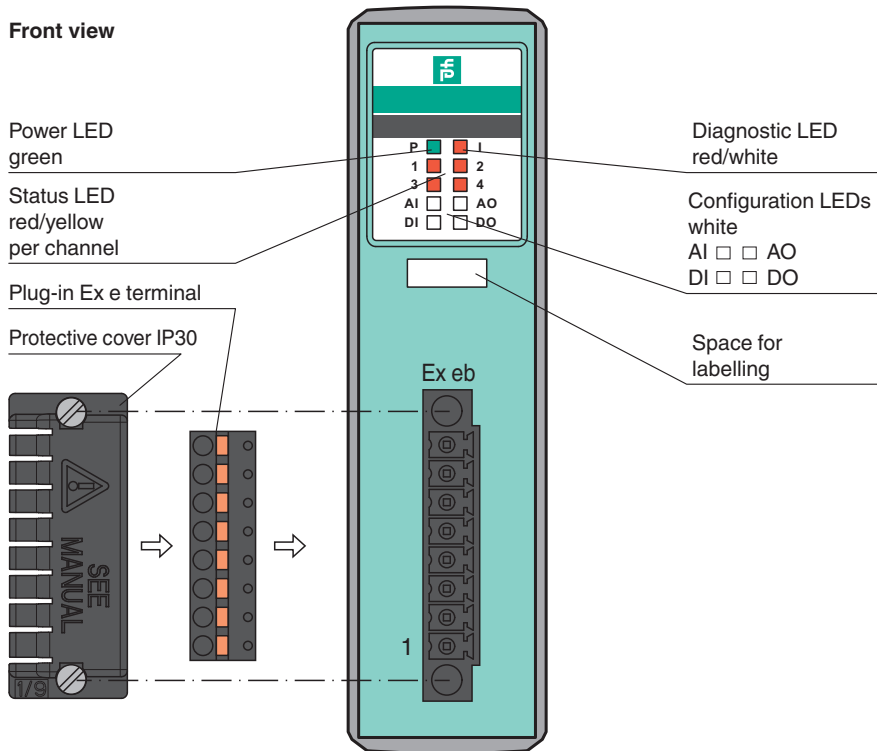

Release date: 2022-08-11 Date of issue: 2022-08-11 Filename: 239065\_eng.pdf