



**Model Number**

**V19-G-BK2,2M-PUR-U/ABG-V19-G**

Connecting cable, M12 to M12, 8-pin, shielded, PUR cable

**Features**

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Flame resistant cable
- Resistant to microbes and hydrolysis
- Halogen-free
- Degree of protection IP67 / IP68 / IP69K

**Dimensions**



**Technical data**

**General specifications**

Number of pins	8 + shield
UL File Number	E231213

**Electrical specifications**

Operating voltage	$U_B$	max. 30 V AC/DC
Operating current	$I_B$	max. 2 A

**Ambient conditions**

Ambient temperature	Body: -40 ... 90 °C (-40 ... 194 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
Pollution degree	3

**Mechanical specifications**

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67 / IP68 / IP69k

**Material**

Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	Diecast zinc
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø 6 mm
Bending radius	> 10 x cable diameter, moving > 8 x cable diameter, fixed

Color	black
Cores	8 x 0.25 mm <sup>2</sup>
Conductor construction	14 x 0.15 mm Ø
Length	L 2.2 m

**Flammability**

Contact carrier	HB
Housing	V-2
Cable	FT2


**Compliance with standards and directives**

Standard conformity	
Degree of protection	EN 60529:2000
Standards	IEC 61076-2-101:2008
Flammability	Grip: UL 94 Cable: UL 1581 Section 1100; IEC 60332-1-2:2004
Halogen-free	IEC 60754-1:1994

**Approvals and certificates**

UL approval	cURus AWM 20549 AWM I/II A/B 80°C 300V FT2 (cable)
-------------	--

**Electrical connection**

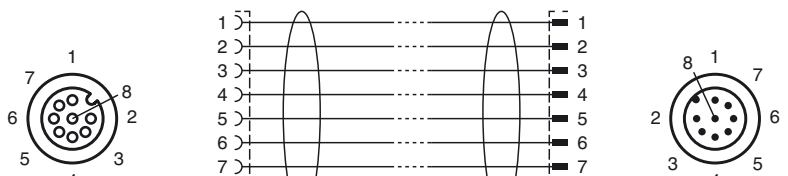

ase date: 2017-03-03 11:32 Date of issue: 2017-03-03 240787-001\_1\_eng.xml

Maximum permissible operating voltage  $\leq 30$  V

Maximum permissible ambient temperature  $\leq 80$  °C ( $\leq 176$  °F)

ase date: 2017-03-03 11:32 Date of issue: 2017-03-03 240787-001\_eng.xml