




Capacitive sensor CBB8-18GS75-E0

- 8 mm flush
- The switching distance can be set over a wide range with the potentiometer



Dimensions

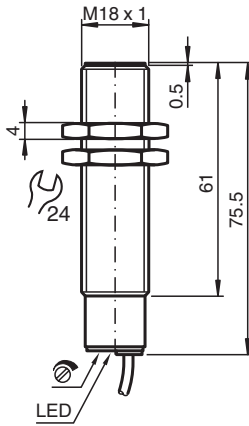

Technical Data

General specifications

Switching function		Normally open (NO)
Output type		NPN
Rated operating distance	s_n	1 ... 8 mm
Installation		flush
Output polarity		DC
Output type		3-wire

Nominal ratings


Installation conditions		
A		0 mm
B		0 mm
C		16 mm
F		36 mm
Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 100 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 1.5 V

Release date: 2025-04-02 Date of issue: 2025-04-02 Filename: 241168_eng.pdf


Technical Data

Temperature drift		max. 20 % at -5 ... 55 °C (23 ... 131 °F)
Operating current	I_L	0 ... 100 mA
No-load supply current	I_0	≤ 18 mA
Time delay before availability	t_v	max. 300 ms
Functional safety related parameters		
MTTF _d		343 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
LED green		Operating display
LED yellow		indication switching state
Potentiometer		sensitivity adjustment
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications		
Connection type		cable
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		PBT
Degree of protection		IP67
Cable		
Wire end ferrules		yes
Material		PUR
Color		black
Number of cores		3
Core cross section		0.34 mm ²
Length	L	2 m
Dimensions		
Length		75 mm
Diameter		18 mm

Connection



Installation Conditions

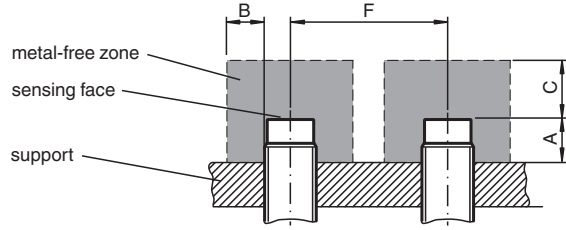

Release date: 2025-04-02 Date of issue: 2025-04-02 Filename: 241168_eng.pdf