

Bulk Raw Cable

CBL-PVC-BK-04x034-100M




■ cURus approval

Cable, PVC/PVC, 4-core black, UL approved



Dimensions

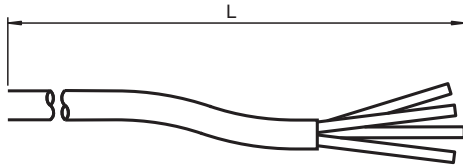

Technical Data

Electrical specifications

Operating voltage U_B max. 300 V AC/DC

Conformity

Flammability UL 1581 , IEC 60332-1-2

Approvals and certificates

UL approval AWM STYLE 2095 AWM I/II A/B 80°C 300V FT1

Ambient conditions

Ambient temperature

Cable, fixed installation -40 ... 80 °C (-40 ... 176 °F)

Cable, flexing -20 ... 80 °C (-4 ... 176 °F)

Pollution degree 3

Mechanical specifications

Cable according to IEC/EN 60228 (DIN VDE 0295) class 5

Sheath diameter 4.3 mm \pm 0,1 mm

Bending radius > 15 x cable diameter, movable installation
> 5 x cable diameter, fixed installation

Sheath stripping force max. 50 N / 300 mm

Sheath color black (similar to RAL 9005)

Number of cores 4

Core cross section 0.34 mm²

Cores color Core 1: brown
Core 2: white
Core 3: blue
Core 4: black

Core construction 19 x 0.15 mm \varnothing

Length L 100 m

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 243715_eng.pdf

Technical Data

Cable code	Li YY 4 x 0,34
Mass	2920 g
Material	
Cable	
Sheathing	PVC
Cores	bare copper (Cu)
Core insulation	PVC
Flammability	FT1

Connection Assignment

_____	_____	BN
_____	_____	WH
_____	_____	BU
_____	_____	BK