

# RFID Transponder

## IQC21-8 10pcs




- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- 64 bit Fixcode
- 896 bits memory available
- Degree of protection IP67
- Packaging unit: 10 pieces

Data carrier



### Dimensions



### Technical Data

#### General specifications

Operating frequency	13.56 MHz
Transfer rate	26 kBit/s

#### Memory

Chip Type	I-CODE SLIX (NXP)
EEPROM	896 Bit
UID	64 Bit
Memory organization	4 bytes/block
Read cycles	unlimited
Write cycles	100000
Data retention period	50 years

#### Directive conformity

Radio equipment	
Directive 2014/53/EU	EN 300330
RoHS	
Directive 2011/65/EU (RoHS)	IEC/EN 63000

#### Standard conformity

Degree of protection	EN 60529
RFID	ISO/IEC 15693-1 ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3

Release date: 2024-06-14 Date of issue: 2024-06-14 Filename: 263240\_eng.pdf

## Technical Data

### Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

### Mechanical specifications

Degree of protection	IP67
Material	
Housing	PBT
Encapsulation compound	CY 221/HY 2966


### Installation

In metal	yes
On metal	yes
In air	yes

### Dimensions

Height	4.4 mm
Height tolerance	± 0.1 mm
Diameter	7.9 mm
Diameter tolerance	± 0.1 mm
Construction type	Cylindrical
Note	Packaging unit, 10-piece

### Reading range in steel IQC21-8

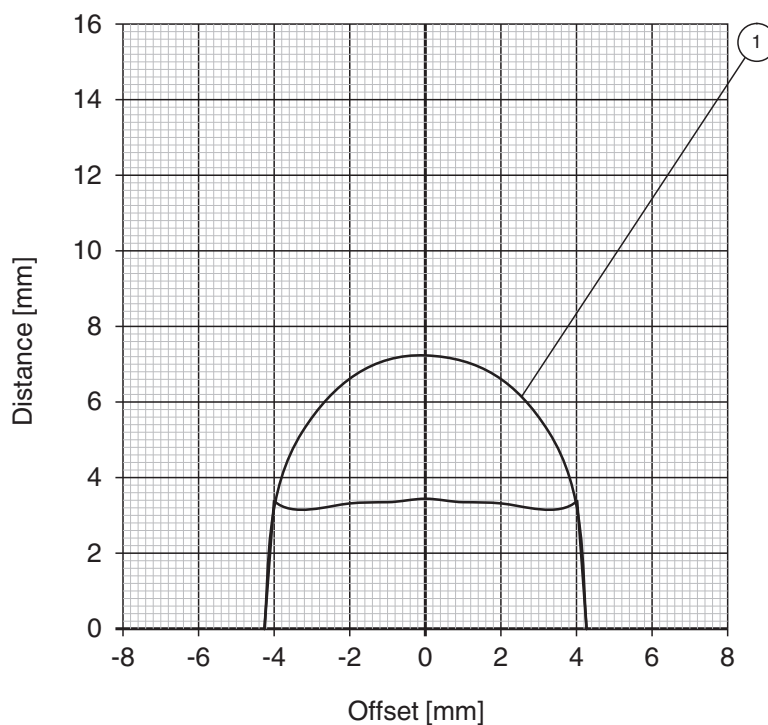

- ① IQH1-18GM-V1    ② IQH1-F61-V1    ③ IQH1-FP-V1  
④ IQH1-F15-V1

Release date: 2024-06-14 Date of issue: 2024-06-14 Filename: 263240\_eng.pdf