

Adapter with USB Interface

S-ADP-USB




- Isolated USB interface cable
- Used with SC-System devices
- Configurable via PC

Adapter with USB Interface

Function

The adapter with USB interface provides the connection between device and PC. Using this connection, the device can be configured by software.

Dimensions

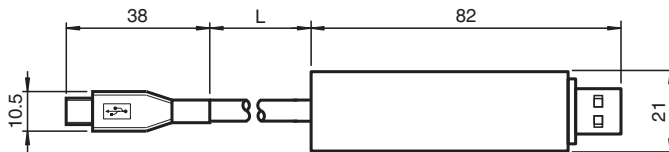

Technical Data

Electrical specifications

Current consumption	50 mA (via USB)
Galvanic isolation	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff} test voltage 3 kV, 50 Hz, 1 min

Directive conformity

Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)

Ambient conditions

Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
---------------------	-------------------------------

Mechanical specifications


Connection	
Device	1 x μUSB
Computer	1 x Type A USB

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 264360_eng.pdf

Technical Data

Mass	50 g
Cable length	1.5 m

Accessories

	SC-Config	
---	------------------	--