



RFID read/write device


IQT1-FP-R4-V1

- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- Dual-LED for function display
- Connection via V1 (M12 x 1) plug connection
- Degree of protection IP67
- Connection via integrated RS-485 interface

HF RFID read/write device, ISO 15693



Dimensions

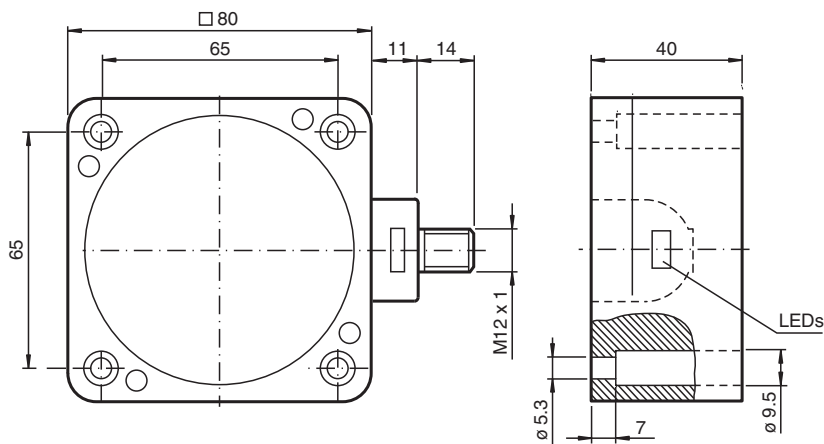

Technical Data


General specifications		
Operating frequency		13.56 MHz
Transfer rate		26 kBit/s
Sensing range		
Read distance		0 ... 130 mm
Write distance		0 ... 130 mm
Width		max. 100 mm
UL File Number		E87056
MTBF		110 a (Operation at +40 °C)
Indicators/operating means		
LED green/yellow		green: power on green flashing: read/write attempt performed yellow: data carrier detected
Electrical specifications		
Rated operating voltage	U _e	10 ... 30 V DC, ripple 10 % _{SS} , limited power source (EN 60950)
Power consumption	P ₀	≤ 1.3 W
Interface		
Physical		RS-485 point-to-point connection

Release date: 2023-08-08 Date of issue: 2023-08-08 Filename: 265937_eng.pdf

Technical Data

Protocol	ASCII
Transfer rate	1200, 2400, 4800, 9600, 19200, 38400 (default) Bit/s
Cable length	≤ 3 m
Directive conformity	
Radio equipment	
Directive 2014/53/EU	EN 301489-1 EN 301489-3 EN 300330 EN 62368-1 EN 50364
RoHS	
Directive 2011/65/EU (RoHS)	IEC/EN 63000
Standard conformity	
Degree of protection	EN 60529
RFID	ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3
Approvals and certificates	
FCC approval	This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NCC approval	CCAM18LP0480T9
Radio approval	USA: FCC IREIQH1-FP-V1
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Housing length	108.5 mm
Housing width	80 mm
Housing height	40 mm
Degree of protection	IP67
Connection	connector M12 x 1
Material	
Housing	PBT
Base	diecast aluminum
Encapsulation compound	CY 221/HY 2966
Installation	
Distance between two heads	≥ 150 mm
Mass	approx. 380 g

Connection

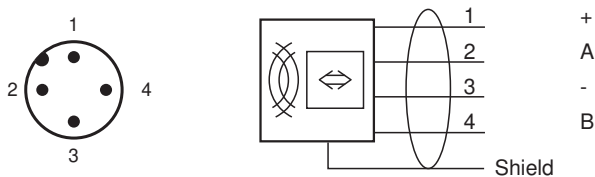














Connection

The device may only be operated on a power source with limited power according to EN 60950.

Factory Setting

Interface transfer rate: 38400 bps
 Port settings: 8 data bits, no parity, 1 stop bit, no handshake
 Tag type: 20

Accessories

	IQC21-50F-T10	Data carrier
	IQC21-58	Data carrier
	IQC22-22-T9 50pcs	Data carrier
	IQC33-20 50pcs	Data carrier
	V1-G-2M-PUR-ABG-V1-W	Cordset M12 socket straight to M12 plug angled A-coded, 4-pin, PUR cable grey, shielded
	V1-G-5M-PUR-ABG-V1-W	Cordset M12 socket straight to M12 plug angled A-coded, 4-pin, PUR cable grey, shielded
	V1-G-10M-PUR-ABG-V1-W	Cordset M12 socket straight to M12 plug angled A-coded, 4-pin, PUR cable grey, shielded
	IQC33-50 25pcs	Data carrier
	IQC21-50 25pcs	Data carrier
	IQC33-30 25pcs	Data carrier
	IQC21-30 25pcs	Data carrier
	IQC21-16 50pcs	Data carrier
	IQC21-10	Data carrier