

# Isolating Amplifier

## S1SD-1AI-1U.2


- 1-channel signal conditioner
- 24 V DC supply
- Input bipolar current and voltage sources
- Output bipolar current and voltage sources
- Accuracy 0.1 %
- Configurable via DIP switches and potentiometer
- Connection via screw terminals



### Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. The device has an input for bipolar current and voltage sources. At the output the signals are available as bipolar current and voltage sources. The device is easily configured by the use of DIP switches and potentiometers. The device can be powered via terminals or Power Bus.

### Connection

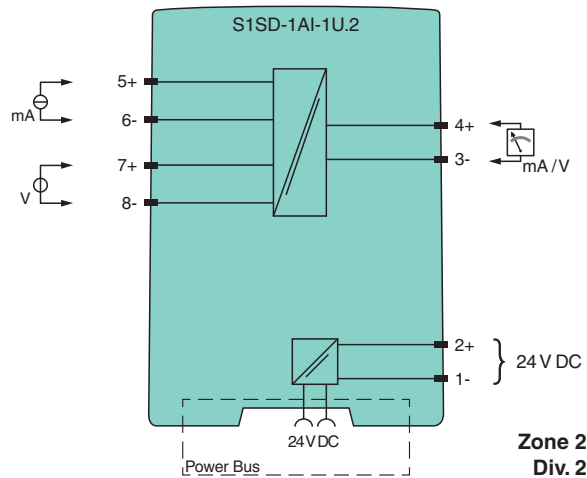

### Technical Data

#### General specifications

Signal type	Analog input	
Operation time	MTBF: 490 a acc. to SN 29500 stationary continuous operating, average ambient temperature 40 °C (104 °F)	
<b>Supply</b>		
Connection	Power Bus or terminals 1-, 2+	
Rated voltage	$U_r$	16.8 ... 31.2 V DC
Power dissipation	0.6 W	
Power consumption	0.8 W	
<b>Input</b>		
Connection side	field side	

## Technical Data

Transmission range	linearity range: unipolar -1 ... 110 % bipolar -110 ... 110 %
<b>Input I</b>	
Connection	terminals 5+, 6-
Input signal	0/4 ... 20 mA , 0/2 ... 10 mA , ± 10 mA , ± 20 mA , max. 50 mA
Input resistance	≤ 25 Ω
<b>Input II</b>	
Connection	terminals 7+, 8-
Input signal	0/1 ... 5 V , 0/2 ... 10 V , ± 5 V , ± 10 V , max. 30 V
Input resistance	> 1 MΩ
<b>Output</b>	
Connection side	control side
Connection	terminals 3-, 4+
Analog voltage output	0/1 ... 5 V , 0/2 ... 10 V , ± 5 V , ± 10 V , load ≥ 2 kΩ
Analog current output	0/4 ... 20 mA , ± 10 mA , ± 20 mA , load ≤ 600 Ω
Ripple	≤ 10 mV <sub>eff</sub>
<b>Transfer characteristics</b>	
Accuracy	max. 0.1 % of full-scale value
Influence of ambient temperature	< 100 ppm/K of full-scale value
Frequency range	0 ... 100 Hz , 0 ... 8 kHz
Settling time	7 ms , 100 μs
<b>Galvanic isolation</b>	
Output/power supply	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub> test voltage 3 kV, 50 Hz, 1 min
Input/Other circuits	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub> test voltage 3 kV, 50 Hz, 1 min
<b>Indicators/settings</b>	
Control elements	DIP switch potentiometer
Configuration	via DIP switches via potentiometer
Labeling	space for labeling at the front
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
<b>Conformity</b>	
Degree of protection	IEC 60529:2001
Protection against electrical shock	EN 61010-1:2010
<b>Ambient conditions</b>	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>	
Degree of protection	IP20
Connection	screw terminals
Core cross section	0.5 ... 2.5 mm <sup>2</sup> (20 ... 14 AWG)
Mass	approx. 70 g
Dimensions	6.2 x 97 x 107 mm (0.24 x 3.82 x 4.21 inch) (W x H x D) , housing type S1
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>	
Certificate	DEMKO 16 ATEX 1750X
Marking	Ⓢ II 3G Ex nA IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-15:2010

**Technical Data**


**International approvals**

UL approval	E106378
IECEX approval	
IECEX certificate	IECEX UL 16.0116X
IECEX marking	Ex nA IIC T4 Gc

**General information**

Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
---------------------------	---

**Assembly**

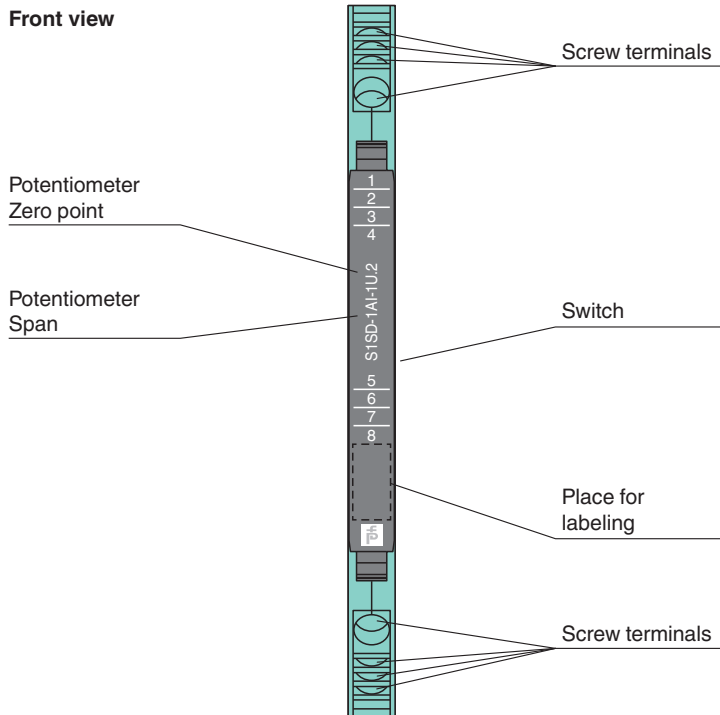

**Configuration**






**Switch settings**

Input – switch S1						Signal	Output – switch S2					
1	2	3	4	5	6		1	2	3	4	5	6
ON						± 10 V	ON	ON		ON		
						0 ... 10 V	ON	ON				
		ON				2 ... 10 V	ON	ON			ON	
ON	ON					± 5 V	ON	ON	ON	ON		
	ON					0 ... 5 V	ON	ON	ON			
	ON	ON				1 ... 5 V	ON	ON	ON		ON	
ON						± 20 mA				ON		
						0 ... 20 mA						
		ON				4 ... 20 mA					ON	
ON	ON					± 10 mA			ON	ON		
	ON					0 ... 10 mA			ON			
	ON	ON				2 ... 10 mA			ON		ON	
						Filter 8 kHz						
						Filter 100 Hz						ON
					ON	Zero potentiometer active						
					ON	Span potentiometer active						

Factory settings: all switches in position OFF

Release date: 2023-04-11 Date of issue: 2023-04-11 Filename: 276398\_eng.pdf

## Matching System Components

	<b>S1SD-2PF</b>	Power Feed Module
	<b>POWERBUS-SETL5.250</b>	Power bus for 35 mm DIN mounting rail, height: 7.5 mm, length: 250 mm
	<b>POWERBUS-SETH5.250</b>	Power bus for 35 mm DIN mounting rail, height: 15 mm, length: 250 mm
	<b>POWERBUS-COV.250</b>	Cover for 35 mm DIN mounting rail, length: 250 mm
	<b>POWERBUS-CAP</b>	End Cap for Power Bus