

# Inductive sensor


## NMB6-12GH50-E2



- 6 mm flush
- Active surface metal
- One-piece housing with stainless steel (V4A; 1.4435)



### Dimensions

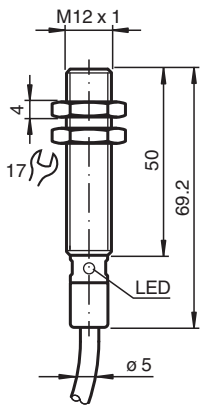

### Technical Data


| General specifications      |       |                                      |
|-----------------------------|-------|--------------------------------------|
| Switching function          |       | Normally open (NO)                   |
| Output type                 |       | PNP                                  |
| Rated operating distance    | $s_n$ | 6 mm                                 |
| Installation                |       | flush in mild steel                  |
| Output polarity             |       | DC                                   |
| Assured operating distance  | $s_a$ | 0 ... 4.86 mm                        |
| Reduction factor $r_{Al}$   |       | 1                                    |
| Reduction factor $r_{Cu}$   |       | 0.85                                 |
| Reduction factor $r_{304}$  |       | 0.5 (0.9 of material thickness 2 mm) |
| Reduction factor $r_{St37}$ |       | 1                                    |
| Output type                 |       | 3-wire                               |
| Nominal ratings             |       |                                      |
| Installation conditions     |       |                                      |
| A                           |       | 0 mm                                 |
| B                           |       | 6 mm                                 |
| C                           |       | 18 mm                                |

Release date: 2024-05-28 Date of issue: 2024-06-04 Filename: 288263\_eng.pdf

## Technical Data

|   |       |  |
|---|-------|--|
| F   |       | 50 mm  |
| Operating voltage                               | $U_B$ | 10 ... 30 V  |
| Switching frequency                             | f     | 0 ... 600 Hz   |
| Hysteresis                                      | H     | 3 ... 15 typ. 5 %  |
| Reverse polarity protection                     |       | yes  |
| Short-circuit protection                        |       | yes  |
| Voltage drop                                    | $U_d$ | $\leq 2$ V   |
| Operating current                               | $I_L$ | 0 ... 200 mA   |
| Off-state current                               | $I_r$ | $\leq 0.1$ mA  |
| No-load supply current                          | $I_0$ | $\leq 10$ mA   |
| Time delay before availability                  | $t_v$ | $\leq 40$ ms   |
| Switching state indicator                       |       | LED, yellow  |
| <b>Limit data</b>                               |       |  |
| Operating pressure statically                   |       | 80 bar (1160.3 psi) max.   |
| <b>Functional safety related parameters</b>     |       |  |
| MTTF <sub>d</sub>                               |       | 652 a  |
| Mission Time (T <sub>M</sub> )                  |       | 20 a   |
| Diagnostic Coverage (DC)                        |       | 0 %  |
| <b>Compliance with standards and directives</b> |       |  |
| Standard conformity                             |       |  |
| Standards                                       |       | EN IEC 60947-5-2   |
| <b>Approvals and certificates</b>               |       |  |
| UL approval                                     |       | cULus Listed, General Purpose                                      |
| CCC approval                                    |       | CCC approval / marking not required for products rated $\leq 36$ V |
| <b>Ambient conditions</b>                       |       |  |
| Ambient temperature                             |       | -25 ... 85 °C (-13 ... 185 °F)                                     |
| <b>Mechanical specifications</b>                |       |  |
| Connection type                                 |       | cable TPE-S , 2 m  |
| Housing material                                |       | Stainless steel 1.4435 / AISI 316L                                 |
| Sensing face                                    |       | Stainless steel 1.4435 / AISI 316L                                 |
| Degree of protection                            |       | IP68 / IP69K   |
| Mass  |       | 112 g  |
| Dimensions                                      |       |  |
| Length  |       | 69 mm  |
| Diameter  |       | 12 mm  |

## Connection



## Installation

