



Retroreflective sensor OBR50M-R300-2P1-V1



- Pulse Ranging Technology (PRT)
- Optimized for use with fixed reflectors
- Good alignability due to red transmission LED
- Reliable detection of reflecting metal objects
- Simple operation with only one TEACH-IN button


Retroreflective sensor



Function

The sensors in the R300 series represent a versatile product line and adopt various functional principles. All sensors operate using proven Pulse Ranging Technology (PRT) and are characterized by high sensing ranges and detection ranges. Contained within the compact housing of the 28 series of light barriers, the R300 offers all of the properties of PRT such as maximum reliability when detecting objects and immunity against ambient light and cross-talk. To achieve this, the sensors in the R300 series make use of a number of different kinds of measurement data. What's more, the sensors are equipped with red light that is safe for the human eye as standard, making it easier to align the devices, even across expansive work areas. These features, combined with an innovative and intuitive operating concept, provide solutions for conventional automation tasks delivering the highest level of performance.

Dimensions

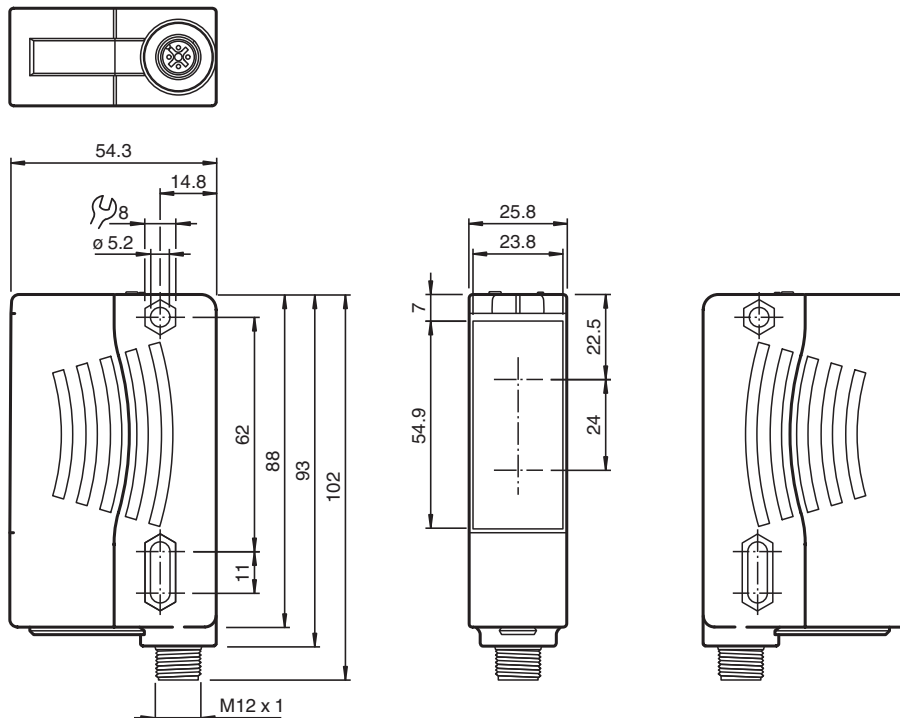

Technical Data


General specifications

Effective detection range	0 ... 50 m
Reflector distance	0.2 ... 50 m

Technical Data

Reference target	3 x REF-H100	
Light source	LED	
Light type	modulated visible red light	
LED risk group labelling	exempt group	
Angle deviation	max. $\pm 2^\circ$	
Measuring method	Pulse Ranging Technology (PRT)	
Diameter of the light spot	approx. 16 cm x 18 cm at a distance of 10 m	
Ambient light limit	50000 Lux	
Window width	100 mm	
Functional safety related parameters		
MTTF _d	100 a	
Mission Time (T _M)	10 a	
Diagnostic Coverage (DC)	0 %	
Indicators/operating means		
Operation indicator	LED green	
Function indicator	2 LEDs yellow for switching state	
Control elements	Teach-In key	
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Ripple	10 % within the supply tolerance	
No-load supply current	I ₀	≤ 80 mA / 24 V DC
Time delay before availability	t _v	< 0.7 s , for temperatures <-30°C compliance of the specification 5 mins after power on
Output		
Switching type	Q - Pin4: NPN normally closed / light-on, PNP normally open / dark-on /Q - Pin2: NPN normally open / dark-on, PNP normally closed / light-on	
Signal output	2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected	
Switching voltage	max. 30 V DC	
Switching current	max. 100 mA	
Switching frequency	f	50 Hz
Response time	5 ms	
Conformity		
Product standard	EN 60947-5-2	
Approvals and certificates		
UL approval	E87056 , cULus Listed , class 2 power supply , type rating 1	
Ambient conditions		
Ambient temperature	-40 ... 55 °C (-40 ... 131 °F)	
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)	
Mechanical specifications		
Housing width	25.8 mm	
Housing height	88 mm	
Housing depth	54.3 mm	
Degree of protection	IP67	
Connection	4-pin, M12 x 1 connector	
Material		
Housing	Plastic ABS	
Optical face	PMMA	
Mass	90 g	


Connection



Connection

Connect the device as set out in the connection diagram.



Connection Assignment



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Assembly



1	Operating indicator	Green
2	Signal indicator	Yellow
3	Teach-in button	
4	Transmitter	
5	Receiver	

Installation

Installation Note

A pressure equalization membrane is fitted on the sensor nameplate. When mounting, make sure that the pressure equalization membrane is not sealed off.

Mounting

The sensors can be secured directly using thru-holes or using a mounting bracket or mounting clamp. Mounting brackets and clamping elements are available as accessories.

Ensure that the background is level to prevent the housing from becoming distorted when the fittings are tightened.


Secure the nut and screw with spring disks to prevent the sensor from becoming misaligned.

Adjustment

The green LED lights up when the operating voltage is applied.

Adjust the sensor so that the light spot is on the center of the reflector. The yellow sensor LEDs light up.

Characteristic Curve

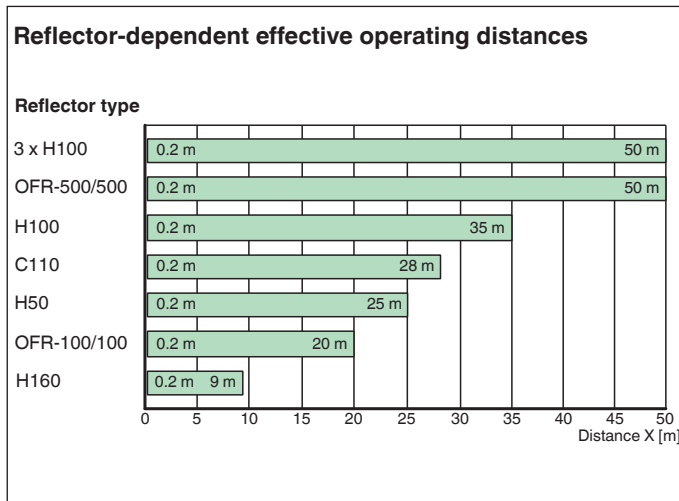

Teach-In

To ensure reliable functionality, save the position of the reflector by using the Teach-in procedure.











- Press the "TI" button (for approx. 2 s) until the yellow and green LEDs flash in phase.
- Teach-in begins once the "TI" button is released.
- **Teach-in successful:** Yellow and green LEDs flash alternately (2.5 Hz). After successful Teach-in, the output and LED change their status.
- **Teach-in unsuccessful:** Yellow and green LEDs flash alternately very quickly (8 Hz). After an unsuccessful Teach-in, the sensor continues to operate with the previous valid setting after the relevant visual fault signal is issued.

Every taught-in reflector position can be retaught (overwritten) by pressing the "TI" button again.


Deleting Taught-in Reflector Position

- To delete a taught-in reflector position, press and hold the "TI" button for > 4 s until the yellow and green LEDs go out.
- Release the "TI" button. The saved reflector position is deleted. The yellow and green lights will flash alternately (2.5 Hz) to confirm that the deletion has occurred.

Accessories

	OMH-05	Mounting aid for round steel \varnothing 12 mm or sheet 1.5 mm ... 3 mm
	OMH-07-01	Mounting aid for round steel \varnothing 12 mm or sheet 1.5 mm ... 3 mm
	OMH-21	Mounting bracket: mounting aid for sensors in the RL* series
	OMH-22	Mounting aid for RL* series
	OMH-VDM28-01	Metal enclosure for inserting protective panes or apertures
	OMH-VDM28-02	Mounting and fine adjustment device for sensors from the 28 series
	OMH-RLK29-HW	Mounting bracket for rear wall mounting
	OMH-K01	dove tail mounting clamp
	OMH-K03	dove tail mounting clamp
	V1-G-2M-PUR	Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable grey

Accessories

	V1-W-2M-PUR	Female cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey
---	--------------------	---