

RFID Transponder

IUC76-F209-M-FR1 10pcs




- Operating frequency 865 ... 868 MHz
- Complies with EPC Gen2 (ISO/IEC 18000-63)
- Sturdy housing, suitable for rough industrial use
- Optimized for mounting in metal

Data carrier



Dimensions

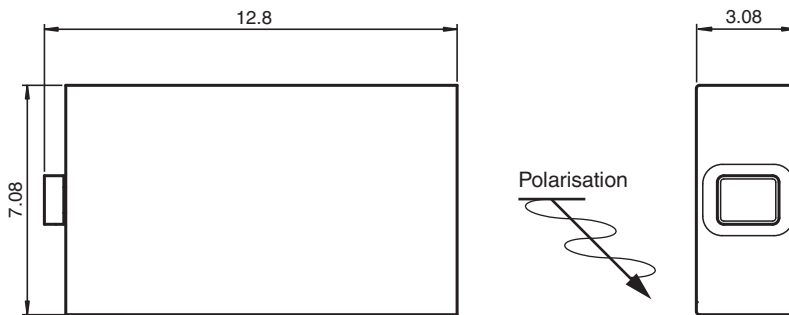

Technical Data

General specifications	
Operating frequency	865 ... 868 MHz
Polarization	linear
Memory	
Chip Type	Higgs-3 (Alien)
Memory Bank 00 (Reserved)	64 Bit
Memory Bank 01 (EPC/UII)	96 ... 480 Bit
Memory Bank 10 (TID)	96 Bit
Memory Bank 11 (User memory)	512 Bit
Read cycles	unlimited
Write cycles	> 100000
Data retention period	50 years
Directive conformity	
Radio equipment	
Directive 2014/53/EU	EN 302208
RoHS	
Directive 2011/65/EU (RoHS)	IEC/EN 63000

Release date: 2022-11-28 Date of issue: 2022-11-28 Filename: 294602_eng.pdf

Technical Data

Standard conformity	
Degree of protection	EN 60529
RFID	ISO/IEC 18000-63
Ambient conditions	
Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 150 °C (-40 ... 302 °F) 200 °C (392 °F) for 3 hours 220 °C (428 °F) for 30 minutes
Mechanical specifications	
Housing length	12.8 mm
Housing width	7.08 mm
Housing height	3.08 mm
Degree of protection	IP68
Material	
Housing	Ceramic
Installation	Adhesive
In metal	yes
Mass	1.4 g
Construction type	Rectangular type
Note	Packaging unit, 10-piece