


## Inductive sensor


### NBN3-8GS40-E2-10M-PUR



- 3 mm non-flush
- Increased operating distance
- Extended temperature range  
-40 ... +85 °C

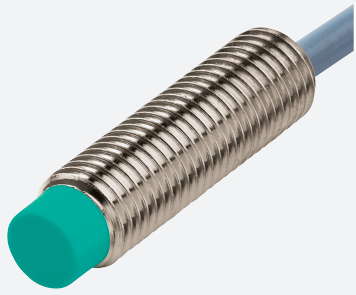

## Dimensions



## Technical Data

### General specifications

|                              |       |   |
|------------------------------|-------|---|
| Switching function           |       | Normally open (NO)  |
| Output type                  |       | PNP   |
| Rated operating distance     | $s_n$ | 3 mm  |
| Installation                 |       | non-flush   |
| Output polarity              |       | DC  |
| Assured operating distance   | $s_a$ | 0 ... 2.43 mm   |
| Actuating element            |       | mild steel, e. g. 1.0037, SR235JR (formerly St37-2)<br>8 mm x 8 mm x 1 mm |
| Reduction factor $r_{Al}$    |       | 0.5   |
| Reduction factor $r_{Cu}$    |       | 0.4   |
| Reduction factor $r_{304}$   |       | 0.75  |
| Reduction factor $r_{Brass}$ |       | 0.5   |
| Output type                  |       | 3-wire  |

### Nominal ratings

|                             |       |                            |
|-----------------------------|-------|----------------------------|
| Operating voltage           | $U_B$ | 5 ... 30 V                 |
| Switching frequency         | $f$   | 0 ... 4500 Hz              |
| Hysteresis                  | $H$   | typ. 5%                    |
| Reverse polarity protection |       | reverse polarity protected |
| Short-circuit protection    |       | pulsing                    |
| Voltage drop                | $U_d$ | $\leq 1.5$ V               |
| Operating current           | $I_L$ | 0 ... 100 mA               |
| Off-state current           | $I_r$ | 0 ... 0.2 mA               |

Release date: 2025-02-27 Date of issue: 2025-02-28 Filename: 304615-0139\_eng.pdf

## Technical Data

|   |       |  |
|---|-------|--|
| No-load supply current                          | $I_0$ | $\leq 10 \text{ mA}$   |
| Time delay before availability                  | $t_v$ | $\leq 100 \text{ ms}$  |
| Switching state indicator                       |       | LED, yellow  |
| <b>Functional safety related parameters</b>     |       |  |
| MTTF <sub>d</sub>                               |       | 960 a  |
| Mission Time (T <sub>M</sub> )                  |       | 20 a   |
| Diagnostic Coverage (DC)                        |       | 0 %  |
| <b>Compliance with standards and directives</b> |       |  |
| Standard conformity                             |       |  |
| Standards                                       |       | EN IEC 60947-5-2   |
| <b>Approvals and certificates</b>               |       |  |
| UL approval                                     |       | cULus Listed, General Purpose, Class 2 Power Source                        |
| CCC approval                                    |       | CCC approval / marking not required for products rated $\leq 36 \text{ V}$ |
| <b>Ambient conditions</b>                       |       |  |
| Ambient temperature                             |       | -40 ... 85 °C (-40 ... 185 °F)   |
| Storage temperature                             |       | -40 ... 85 °C (-40 ... 185 °F)   |
| <b>Mechanical specifications</b>                |       |  |
| Connection type                                 |       | cable  |
| Housing material                                |       | Stainless steel 1.4305 / AISI 303  |
| Sensing face                                    |       | LCP  |
| Degree of protection                            |       | IP65 / IP66 / IP67   |
| <b>Cable</b>                                    |       |  |
| Wire end ferrules                               |       | yes  |
| Cable diameter                                  |       | 3.3 mm $\pm$ 0.15 mm   |
| Bending radius                                  |       | > 10 x cable diameter  |
| Material  |       | PUR  |
| Color   |       | black  |
| Number of cores                                 |       | 3  |
| Core cross section                              |       | 0.14 mm <sup>2</sup>   |
| Length  | L     | 10 m   |
| <b>Dimensions</b>                               |       |  |
| Length  |       | 40 mm  |
| Diameter  |       | 8 mm   |
| <b>General information</b>                      |       |  |
| Scope of delivery                               |       | 2 hex nuts included  |

## Connection

