




## Glass fiber optic FE-BTS6M-3

- Cylindrical sensing head
- Straight optics
- 5/16 - 24 UNF thread
- Flexible PVC sheathing

Glass fiber optic - diffuse

### Dimensions

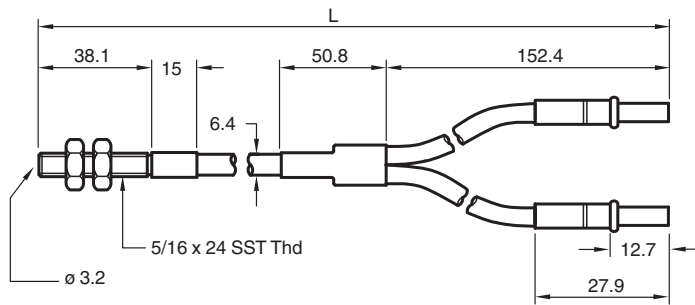

### Technical Data

#### General specifications

Sensor range	MHP-FR: 45 mm MHP-F: 90 mm RL(K)61-LL: 160 mm MPG6HD: 180 mm
Fiber optic length	l 3 ft (.914 m)
End piece	Optical axis: Straight Type: Cylindrical / threaded barrel Thread size: 5/16 - 24 UNF
Bending radius	min. 19 mm
Fiber bundle diameter	3.2 mm

#### Ambient conditions

Ambient temperature	-40 ... 120 °C (-40 ... 248 °F)
---------------------	---------------------------------

#### Mechanical specifications

Material	
Optical face	glass
Sheathing	PVC
Core	glass

Release date: 2020-11-02 Date of issue: 2020-11-02 Filename: 453597\_eng.pdf

## Technical Data

End piece	Stainless steel 1.4305 / AISI 303
Adapter	Stainless steel, 4.7 mm diameter
<b>General information</b>	
Scope of delivery	2 hex nuts included
<b>Fiber optic amplifiers</b>	
Device series	MP, MHP, Series 61

## Installation

**Note:** If after installing the device the yellow signal indicator lights up or flashes, the sensor detects a nonexisting object. Reduce the sensitivity of the sensor.

## Application

**Attention:**

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.

