


Glass fiber optic FE-BTSAS6S-3



- Cylindrical sensing head
- Right angle optics
- 5/16 - 24 UNF thread
- Durable stainless steel sheathing

Glass fiber optic - diffuse

Dimensions

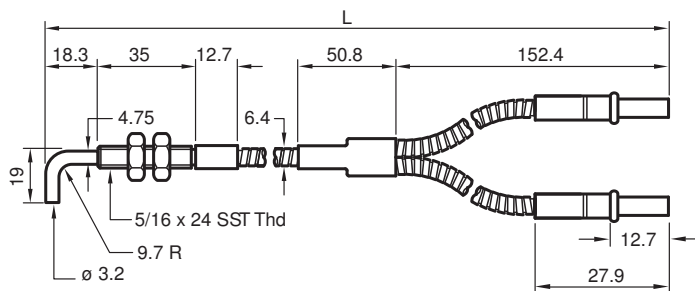

Technical Data

General specifications

Sensor range		MHP-FR: 36 mm MHP-F: 80 mm RL(K)61-LL: 155 mm MPG6HD: 170 mm
Fiber optic length	l	3 ft (.914 m)
End piece		Optical axis: Right angle Type: Cylindrical / smooth barrel Thread size: 5/16 - 24 UNF
Bending radius		min. 25 mm
Fiber bundle diameter		3.2 mm

Ambient conditions

Ambient temperature		-40 ... 232 °C (-40 ... 449.6 °F)
---------------------	--	-----------------------------------

Mechanical specifications

Material		
Optical face		glass
Sheathing		Stainless steel 1.4305 / AISI 303
Core		glass
End piece		Stainless steel 1.4305 / AISI 303, brass

Release date: 2020-11-02 Date of issue: 2020-11-02 Filename: 453604_eng.pdf

Technical Data

Adapter	Stainless steel, 4.7 mm diameter
General information	
Scope of delivery	2 hex nuts included
Fiber optic amplifiers	
Device series	MP, MHP, Series 61

Installation

Note: If after installing the device the yellow signal indicator lights up or flashes, the sensor detects a nonexisting object. Reduce the sensitivity of the sensor.

Application

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.

