


Bulk Spiral Cable

SPK 5x0,25mm² BL500/1000/200

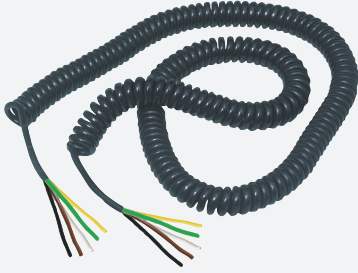


- Resistant to microbes and hydrolysis
- UV resistant
- Halogen-free

Spiral Cable, PUR/PUR, 5-core black



Dimensions

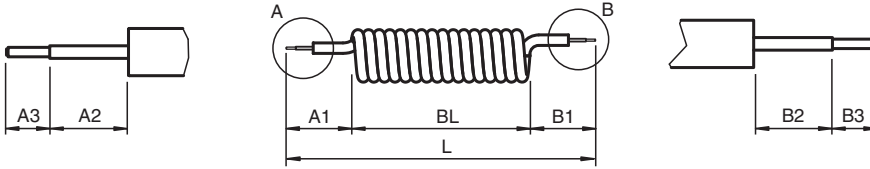

Technical Data

| General specifications | |
|---------------------------|---|
| Customization | sheath stripped , with wire end ferrule |
| Electrical specifications | |
| Operating voltage | U_B max. 250 V AC/DC |
| Conformity | |
| Product standard | on the basis of DIN VDE 0812 |
| Ambient conditions | |
| Ambient temperature | -25 ... 80 °C (-13 ... 176 °F) |
| Pollution degree | 3 |
| Mechanical specifications | |
| Cable | according to IEC/EN 60228 (DIN VDE 0295) class 6 |
| Sheath diameter | 5.8 mm |
| Sheath color | black (similar to RAL 9005) |
| Number of cores | 5 |
| Core cross section | 0.25 mm ² |
| Cores color | Core 1: white Core 2: brown Core 3: green Core 4: yellow Core 5: black |
| Core construction | 65 x 0.07 mm Ø |
| Length | L 1.7 m extension length max. 2 m BL: 500 mm A1: 1000 mm A2: 74 mm A3: 6 mm B1: 200 mm B2: 34 mm B3: 6 mm |
| Cable code | Li F 11Y 11Y 5 x 0,25 |
| Mass | 220 g |
| Material | |
| Halogen-free | yes |

Release date: 2024-07-05 Date of issue: 2024-07-05 Filename: 64314767_eng.pdf

Technical Data

| | |
|-----------------------|------------------|
| Cable | |
| Sheathing | TMPU |
| Cores | bare copper (Cu) |
| Core insulation | TMPU |
| UV resistance | yes |
| Oil resistance | yes |
| Microbial resistance | yes |
| Hydrolysis resistance | yes |

Connection Assignment

| | |
|-------|----|
| _____ | WH |
| _____ | BN |
| _____ | GN |
| _____ | YE |
| _____ | BK |