


# Bulk Spiral Cable

## SPK 3x0,5mm<sup>2</sup> BL600/200/500

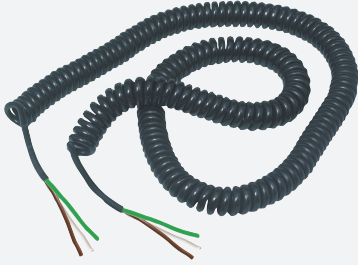


- Resistant to microbes and hydrolysis
- UV resistant
- Halogen-free

Spiral Cable, PUR/PUR, 3-core black



### Dimensions

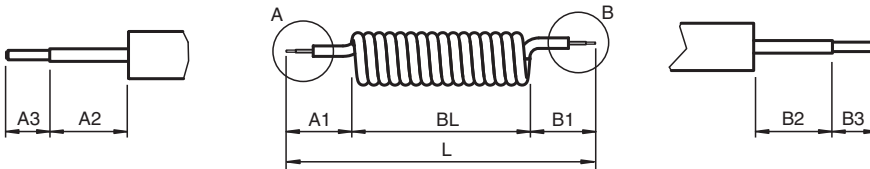

### Technical Data

<b>General specifications</b>	
Customization	sheath stripped , with wire end ferrule
<b>Electrical specifications</b>	
Operating voltage	U <sub>B</sub> max. 250 V AC/DC
<b>Conformity</b>	
Product standard	on the basis of DIN VDE 0812
<b>Ambient conditions</b>	
Ambient temperature	-25 ... 80 °C (-13 ... 176 °F)
Pollution degree	3
<b>Mechanical specifications</b>	
Cable	according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter	5 mm
Sheath color	black (similar to RAL 9005)
Number of cores	3
Core cross section	0.5 mm <sup>2</sup>
Cores color	Core 1: white Core 2: brown Core 3: green
Core construction	64 x 0.1 mm Ø
Length	L 1.3 m extension length max. 2.4 m BL: 600 mm A1: 200 mm A2: 34 mm A3: 6 mm B1: 500 mm B2: 34 mm B3: 6 mm
Cable code	Li F 12Y 11Y 3 x 0,5
Mass	205 g
<b>Material</b>	
Halogen-free	yes
Cable	

Release date: 2024-07-05 Date of issue: 2024-07-05 Filename: 64314921\_eng.pdf

## Technical Data

Sheathing	TMPU
Cores	bare copper (Cu)
Core insulation	TPE-E
UV resistance	yes
Oil resistance	yes
Microbial resistance	yes
Hydrolysis resistance	yes

## Connection Assignment

_____	WH
_____	BN
_____	GN