


# Bulk Spiral Cable

## SPK 5x0,25mm<sup>2</sup> BL900/2000/350

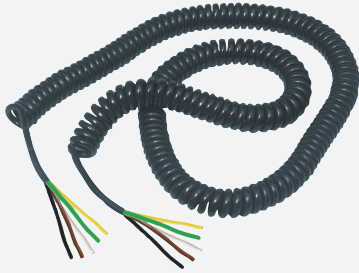


- Resistant to microbes and hydrolysis
- UV resistant
- Halogen-free

Spiral Cable, PUR/PUR, 5-core black



### Dimensions

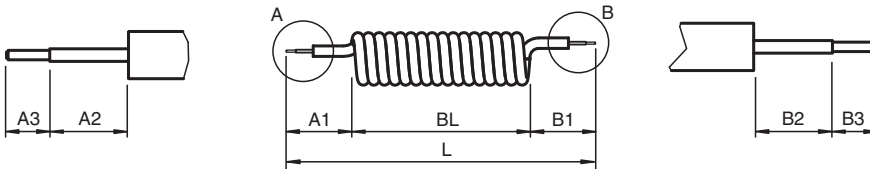

### Technical Data

General specifications	
Customization	sheath stripped , with wire end ferrule
Electrical specifications	
Operating voltage	$U_B$ max. 250 V AC/DC
Conformity	
Product standard	on the basis of DIN VDE 0812
Ambient conditions	
Ambient temperature	-25 ... 80 °C (-13 ... 176 °F)
Pollution degree	3
Mechanical specifications	
Cable	according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter	5.8 mm
Sheath color	black (similar to RAL 9005)
Number of cores	5
Core cross section	0.25 mm <sup>2</sup>
Cores color	Core 1: white Core 2: brown Core 3: green Core 4: yellow Core 5: black
Core construction	65 x 0.07 mm Ø
Length	L 3.25 m extension length max. 3.6 m BL: 900 mm A1: 2000 mm A2: 34 mm A3: 6 mm B1: 350 mm B2: 34 mm B3: 6 mm
Cable code	Li F 11Y 11Y 5 x 0,25
Mass	375 g
Material	
Halogen-free	yes

Release date: 2024-07-05 Date of issue: 2024-07-05 Filename: 64314923\_eng.pdf

## Technical Data

Cable	
Sheathing	TMPU
Cores	bare copper (Cu)
Core insulation	TMPU
UV resistance	yes
Oil resistance	yes
Microbial resistance	yes
Hydrolysis resistance	yes

## Connection Assignment

_____	WH
_____	BN
_____	GN
_____	YE
_____	BK