


Bulk Spiral Cable

SPK 3x0,5mm² BL750/200/500

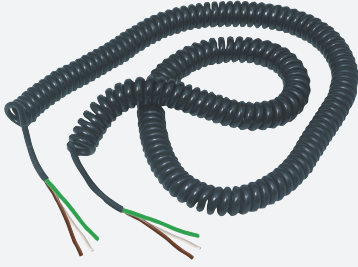


- Resistant to microbes and hydrolysis
- UV resistant
- Halogen-free

Spiral Cable, PUR/PUR, 3-core black



Dimensions

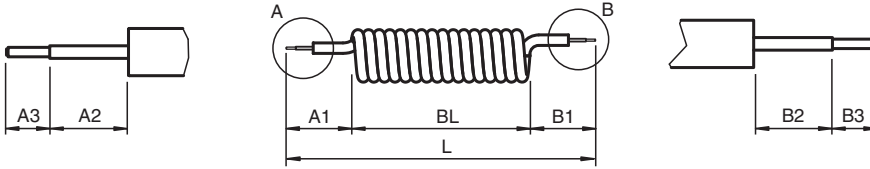

Technical Data

| General specifications | |
|---------------------------|---|
| Customization | sheath stripped , with wire end ferrule |
| Electrical specifications | |
| Operating voltage | U _B max. 250 V AC/DC |
| Conformity | |
| Product standard | on the basis of DIN VDE 0812 |
| Ambient conditions | |
| Ambient temperature | -25 ... 80 °C (-13 ... 176 °F) |
| Pollution degree | 3 |
| Mechanical specifications | |
| Cable | according to IEC/EN 60228 (DIN VDE 0295) class 6 |
| Sheath diameter | 5 mm |
| Sheath color | black (similar to RAL 9005) |
| Number of cores | 3 |
| Core cross section | 0.5 mm ² |
| Cores color | Core 1: white Core 2: brown Core 3: green |
| Core construction | 64 x 0.1 mm Ø |
| Length | L 1.45 m extension length max. 3 m BL: 750 mm A1: 200 mm A2: 34 mm A3: 6 mm B1: 500 mm B2: 34 mm B3: 6 mm |
| Cable code | Li F 12Y 11Y 3 x 0,5 |
| Mass | 240 g |
| Material | |
| Halogen-free | yes |
| Cable | |

Release date: 2024-07-05 Date of issue: 2024-07-05 Filename: 64314931_eng.pdf

Technical Data

| | |
|-----------------------|------------------|
| Sheathing | TMPU |
| Cores | bare copper (Cu) |
| Core insulation | TPE-E |
| UV resistance | yes |
| Oil resistance | yes |
| Microbial resistance | yes |
| Hydrolysis resistance | yes |

Connection Assignment

| | |
|-------|----|
| _____ | WH |
| _____ | BN |
| _____ | GN |