


Bulk Spiral Cable

SPK 6x0,25mm² BL900/4000/350

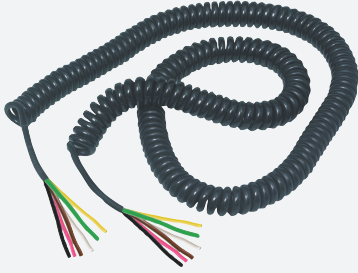


- Resistant to microbes and hydrolysis
- UV resistant
- Halogen-free

Spiral Cable, PUR/PUR, 6-core black



Dimensions

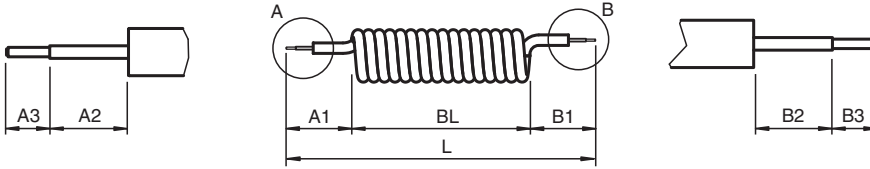

Technical Data

General specifications	
Customization	sheath stripped , with wire end ferrule
Electrical specifications	
Operating voltage	U_B max. 300 V AC/DC
Conformity	
Product standard	on the basis of VDE 0250
Oil resistance	DIN VDE 0472
Ambient conditions	
Ambient temperature	-30 ... 80 °C (-22 ... 176 °F)
Pollution degree	3
Mechanical specifications	
Cable	according to IEC/EN 60228 (DIN VDE 0295) class 5
Sheath diameter	4.7 mm
Sheath color	black (similar to RAL 9005)
Number of cores	6
Core cross section	0.25 mm ²
Cores color	Core 1: white Core 2: brown Core 3: green Core 4: yellow Core 5: black Core 6: pink
Core construction	14 x 0.15 mm Ø
Length	L 5.25 m extension length max. 3.6 m BL: 900 mm A1: 4000 mm A2: 44 mm A3: 6 mm B1: 350 mm B2: 44 mm B3: 6 mm
Cable code	Li 12Y 11Y 6 x 0,25
Mass	250 g

Release date: 2024-07-05 Date of issue: 2024-07-05 Filename: 64316978_eng.pdf

Technical Data

Material

Halogen-free		yes
Cable		
Sheathing		PUR
Cores		bare copper (Cu)
Core insulation		TPE-E
UV resistance		yes
Oil resistance		yes
Microbial resistance		yes
Hydrolysis resistance		yes

Connection Assignment

_____	WH
_____	BN
_____	GN
_____	YE
_____	BK
_____	PK