

Diffuse mode sensor

OBD500-18GM60-E4-5M-IR-1C




- Strong metallic housing in cylindrical shape M18 x 1
- Operating distance adjustable
- Not sensitive to ambient light
- Degree of protection IP67
- High operating distance



Function

The optical sensors of this series have an M18 threaded housing that is optionally available in plastic or metal. The sensors are robust and versatile. Focusing on the essential requirements simplifies selection and commissioning, saving time and costs.

Dimensions

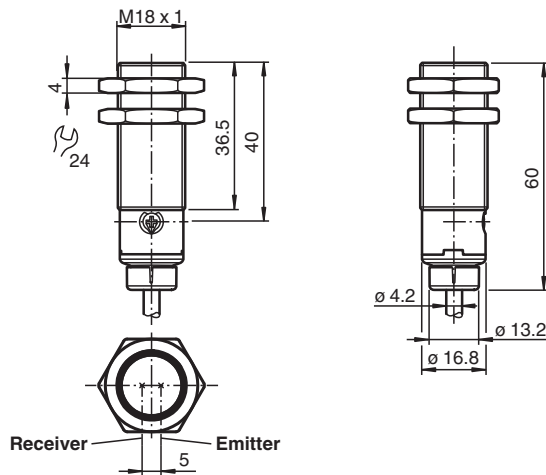

Technical Data

General specifications


| | |
|----------------------------|--------------------------------|
| Detection range | 0 ... 500 mm |
| Detection range min. | 0 ... 30 mm |
| Detection range max. | 0 ... 500 mm |
| Adjustment range | 30 ... 500 mm |
| Reference target | standard white 200 mm X 200 mm |
| Light source | IRED |
| Light type | infrared |
| Diameter of the light spot | approx. 52 mm at 500 mm |
| Opening angle | approx. 2.6 ° |
| Optical face | frontal |
| Ambient light limit | EN 60947-5-2 10000 Lux |

Release date: 2022-08-29 Date of issue: 2022-08-29 Filename: 70113328-100155_eng.pdf


Technical Data

| | | |
|---|----------------|---|
| Hysteresis | H | < 15 % |
| Functional safety related parameters | | |
| MTTF _d | | 854 a |
| Mission Time (T _M) | | 20 a |
| Diagnostic Coverage (DC) | | 0 % |
| Indicators/operating means | | |
| Operation indicator | | LED green: on - power on flashing (4 Hz) - short circuit |
| Function indicator | | LED yellow: permanently lit - output active permanently off - output inactive |
| Control elements | | sensitivity adjustment |
| Control elements | | light/dark on electrically switchable |
| Electrical specifications | | |
| Operating voltage | U _B | 10 ... 30 V DC |
| Ripple | | max. 10 % |
| No-load supply current | I ₀ | < 25 mA |
| Protection class | | III |
| Output | | |
| Switching type | | The switching type of the sensor is adjustable. The default setting is: Q - Pin4: NPN output / light-on L/D-On - WH: Low-active input |
| Signal output | | 1 NPN output, short-circuit protected, reverse polarity protected, open collector |
| Switching voltage | | max. 30 V DC |
| Switching current | | max. 100 mA , resistive load |
| Voltage drop | U _d | ≤ 2 V DC |
| Switching frequency | f | 500 Hz |
| Response time | | ≤ 1 ms |
| Conformity | | |
| Product standard | | EN 60947-5-2 |
| Approvals and certificates | | |
| UL approval | | E87056 , cULus Listed , class 2 power supply , type rating 1 |
| Ambient conditions | | |
| Ambient temperature | | -40 ... 60 °C (-40 ... 140 °F) |
| Storage temperature | | -40 ... 70 °C (-40 ... 158 °F) |
| Mechanical specifications | | |
| Degree of protection | | IP67 |
| Connection | | 5 m fixed cable |
| Material | | |
| Housing | | brass, nickel-plated |
| Optical face | | PMMA |
| Cable | | PVC |
| Mass | | approx. 140 g |




Connection

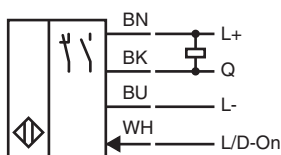

Indication

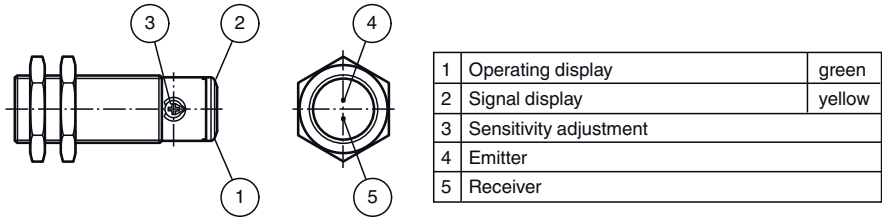

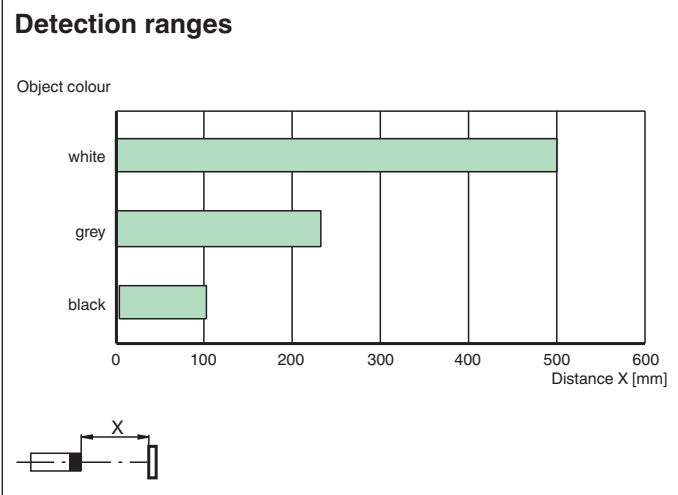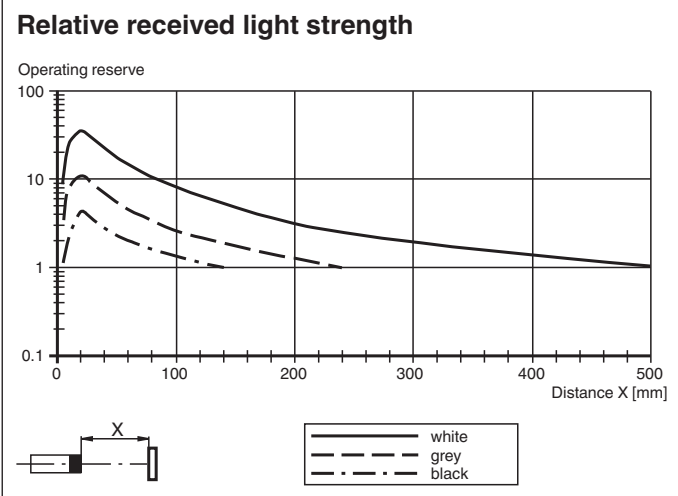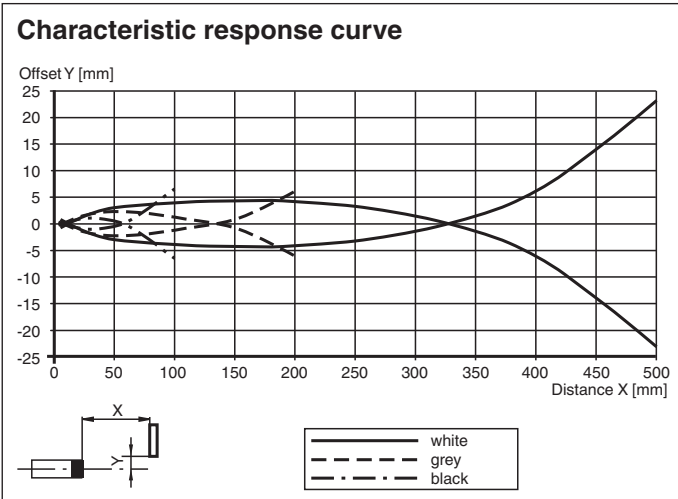



Characteristic Curve



Release date: 2022-08-29 Date of issue: 2022-08-29 Filename: 70113328-100155_eng.pdf

Accessories

| | | |
|---|-----------------|---|
|  | BF 18 | Mounting flange, 18 mm |
|  | CPZ18B03 | Mounting Bracket with swivel nut |
|  | BF 18-F | Plastic mounting adapter, 18 mm |
|  | BF 5-30 | Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm |