

Serial Device Server

ICDM-RX/TCP-4DB9/2RJ45-PM



- Web-based configuration
- RS-232/422/485 software selectable interfaces
- NEMA TS2 Certified
- TCP/IP & UDP Socket Services
- Device drivers (Windows and Linux)
- Panel mount with DB9 serial connectors


Device Server 4-port panel mount DB9



Function

The ICDM-RX/TCP product family enables the connection of serial devices (RS-232 / RS-422 / RS-485) using a device driver (Windows or Linux) or Ethernet TCP/IP devices using socket services to an industrial Ethernet network. The integrated webserver enables complete configuration of all module parameters like serial interface, baud rate, parity, data bits, stop bits, or flow control. Products are available in different versions for DB9 or screw terminal connection.

Dimensions

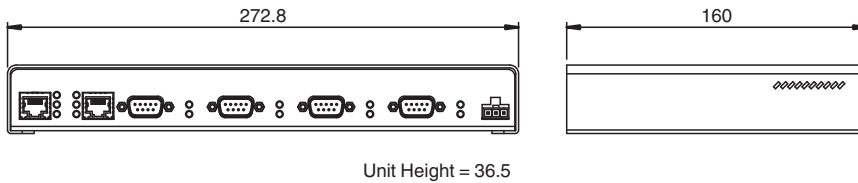

Technical Data


General specifications	
UL File Number	E185802
MTBF	35.5 a
Indicators/operating means	
LED indication	see manual
Electrical specifications	
Rated operating voltage	U _e 9 ... 30 V DC
Nominal voltage	24 V DC
Surge protection	15 KV / 200 A for 1 ns
Interface	
Interface type	Software selectable interfaces: RS-232 , RS-422 , RS-485 (2 and 4-wire)
Physical	4 x DB9
Protocol	Raw serial
Supported baud rates	300 bps to 230Kbps
Interface 1	
Interface type	Industrial Ethernet
Physical	2 x RJ45
Protocol	TCP/IP
Additional protocols	ARP, BOOTP, DHCP/RARP, HTTP, HTTPS, SSH, SSL/TLS, ICMP, RFC 1006 (ISO over TCP), SNMP (MIB-II), TCP/IP & UDP socket services, Telnet, and TFTP, and supports IP multicast data transmission
Transfer rate	10/100 Mbps

Release date: 2024-10-01 Date of issue: 2024-10-01 Filename: 70114046_eng.pdf

Technical Data

Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 55032:2015+A11:2020 , EN 55035:2017/A11:2020
RoHS	EN IEC 63000:2018
Standard conformity	
Degree of protection	NEMA TS2
Electrical safety	EN 62368-1:2014-08
Emitted interference	EN 55032, FCC Part 15 Subpart B, ICES-003, AS/NZS CISPR 32
Noise immunity	EN 55035:2017/A11:2020
Ambient conditions	
Ambient temperature	-40 ... 75 °C (-40 ... 167 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	max. 95 %
Altitude	0 ... 3048 m
Mechanical specifications	
Degree of protection	IP20
Connection	Power Supply: screw terminals Fieldbus: 2 x RJ45 Inputs/outputs: 4 x DB9
Material	
Housing	steel, black coated
Mass	1.5kg
Dimensions	
Height	38.1 mm
Width	160 mm
Length	275 mm
Construction type	Cabinet module
Mounting	Panel


Connection



DB9 Connectors		
RS-232	RS-422/RS-485	RS-485
	Full Duplex	Half Duplex
1 = DCD	1 = n.c.	1 = n.c.
2 = RxD	2 = RxD-	2 = n.c.
3 = TxD	3 = TxD-	3 = TRxD-
4 = DTR	4 = n.c.	4 = n.c.
5 = GND	5 = GND	5 = GND
6 = DSR	6 = n.c.	6 = n.c.
7 = RTS	7 = TxD+	7 = TRxD+
8 = CTS	8 = RxD+	8 = n.c.
9 = RI	9 = n.c.	9 = n.c.
Ethernet		
1 = Tx+	5 = n.c.	
2 = Tx-	6 = Rx-	
3 = Rx+	7 = n.c.	
4 = n.c.	8 = n.c.	

Release date: 2024-10-01 Date of issue: 2024-10-01 Filename: 70114046_eng.pdf

Assembly

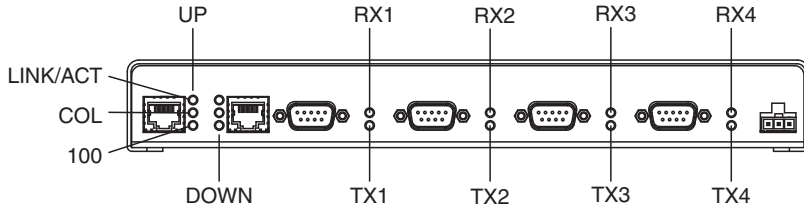

Release date: 2024-10-01 Date of issue: 2024-10-01 Filename: 70114046_eng.pdf