



Background suppression sensor

ML100-8-H-250-BU/95/103



- Miniature design
- Easy to use
- Full metal thread mounting
- Highly visible LEDs for Power ON and switching state
- Not sensitive to ambient light
- Very bright, highly visible blue light spot


Triangulation sensor with background suppression, 250 mm adjustable detection range, blue light, light/dark on, pnp output, M8 plug 4-pin



Function

The optical sensors of this series are suitable for both standard and demanding applications. The series features a miniature housing design, two M3 metal-threaded mounting holes and a highly visible LED status indicator. Each device is equipped with a sensitivity adjuster and a light-on/dark-on changeover switch for increased flexibility. A wide variety of versions are available in both infrared light and red light with PowerBeam for easy alignment. Special versions with BlueBeam are suitable for challenging applications like those in the solar and battery industries.

Dimensions

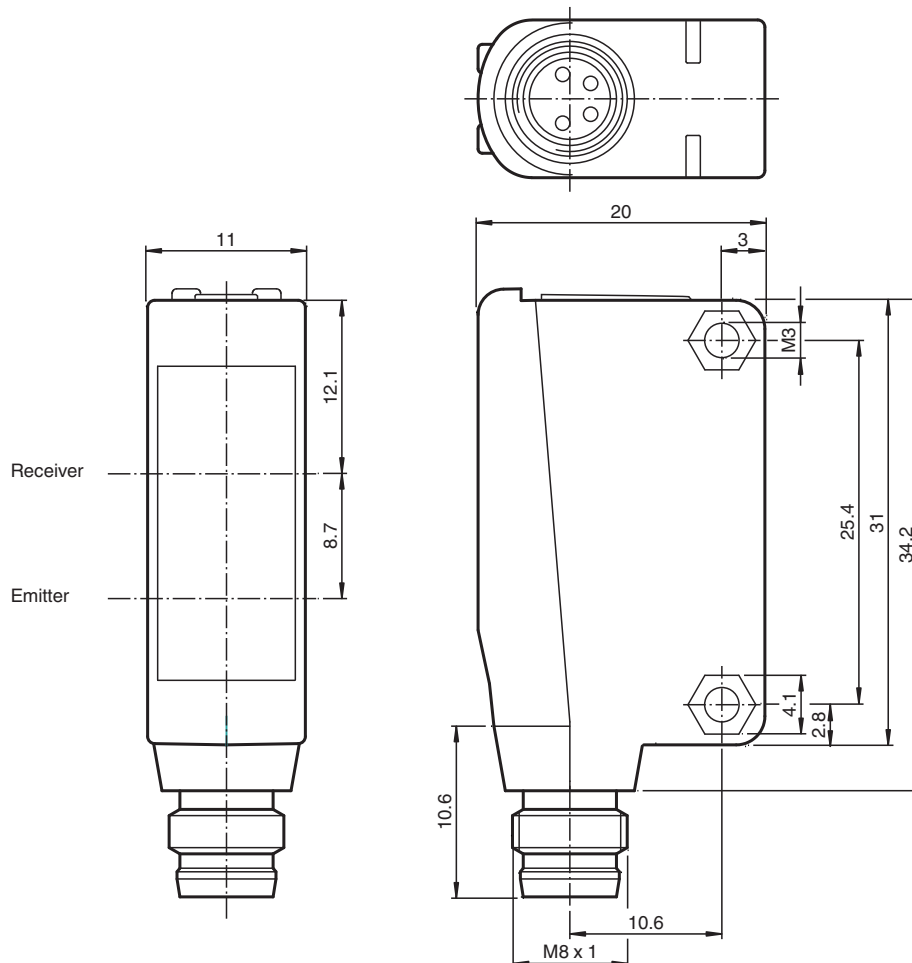

Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 70114686_eng.pdf


Technical Data

| General specifications | | |
|--------------------------------------|----------------|---|
| Detection range | | 5 ... 250 mm |
| Detection range min. | | 5 ... 30 mm |
| Detection range max. | | 5 ... 250 mm |
| Adjustment range | | 30 ... 250 mm |
| Reference target | | standard white, 100 mm x 100 mm |
| Light source | | LED |
| Light type | | modulated visible blue light |
| Polarization filter | | no |
| Black-white difference (6 %/90 %) | | <30% at 250 mm, <20% at 200 mm, <10% at 150 mm |
| Diameter of the light spot | | approx. 14 mm at a distance of 250 mm |
| Opening angle | | approx. 4 ° |
| Optical face | | frontal |
| Ambient light limit | | EN 60947-5-2 |
| Functional safety related parameters | | |
| MTTF _d | | 840 a |
| Mission Time (T _M) | | 20 a |
| Diagnostic Coverage (DC) | | 0 % |
| Indicators/operating means | | |
| Operation indicator | | LED green: power on |
| Function indicator | | LED yellow: lights when object is detected |
| Control elements | | Sensing range adjuster |
| Control elements | | Light-on/dark-on changeover switch |
| Electrical specifications | | |
| Operating voltage | U _B | 10 ... 30 V DC |
| Ripple | | max. 10 % |
| No-load supply current | I ₀ | < 20 mA |
| Output | | |
| Switching type | | The switching type of the sensor is adjustable. The default setting is: light-on |
| Signal output | | 1 PNP output, short-circuit protected, reverse polarity protected, open collector |
| Switching voltage | | max. 30 V DC |
| Switching current | | max. 100 mA , resistive load |
| Voltage drop | U _d | ≤ 1.5 V DC |
| Switching frequency | f | 500 Hz |
| Response time | | 1 ms |
| Conformity | | |
| Product standard | | EN 60947-5-2 |
| Photobiological safety | | Risk group 1 according to IEC 62471 |
| Approvals and certificates | | |
| UL approval | | cULus Listed, Class 2 Power Source or listed Power Supply with a limited voltage output with (maybe integrated) fuse (max. 3.3 A according UL248), Type 1 enclosure |
| CCC approval | | CCC approval / marking not required for products rated ≤36 V |
| Ambient conditions | | |
| Ambient temperature | | -30 ... 60 °C (-22 ... 140 °F) |
| Storage temperature | | -40 ... 70 °C (-40 ... 158 °F) |
| Mechanical specifications | | |
| Housing width | | 11 mm |
| Housing height | | 31 mm |
| Housing depth | | 20 mm |
| Degree of protection | | IP67 |
| Connection | | Connector M8 x 1 , 4-pin |
| Material | | |
| Housing | | PC (Polycarbonate) |

Technical Data

| | |
|-------------------------------------|--------------|
| Optical face | PMMA |
| Mass | approx. 10 g |
| Tightening torque, fastening screws | 0.6 Nm |

Connection




Connection Assignment



Wire colors in accordance with EN 60947-5-2




| | | |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue) |
| 4 | BK | (black) |

Assembly



| | | |
|---|----------------------|--------|
| 1 | Light-Dark-switching | |
| 2 | Sensitivity adjuster | |
| 3 | Signal display | yellow |
| 4 | Operating display | green |

Characteristic Curve

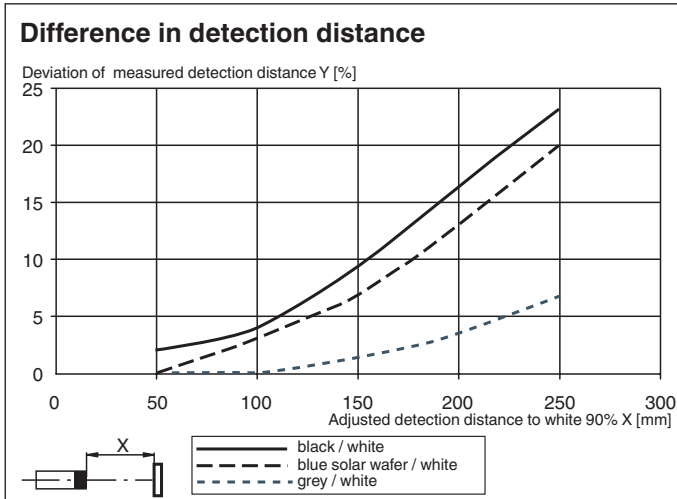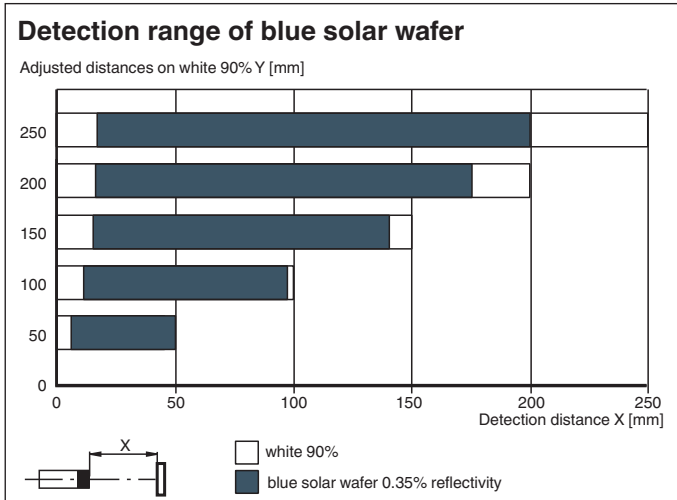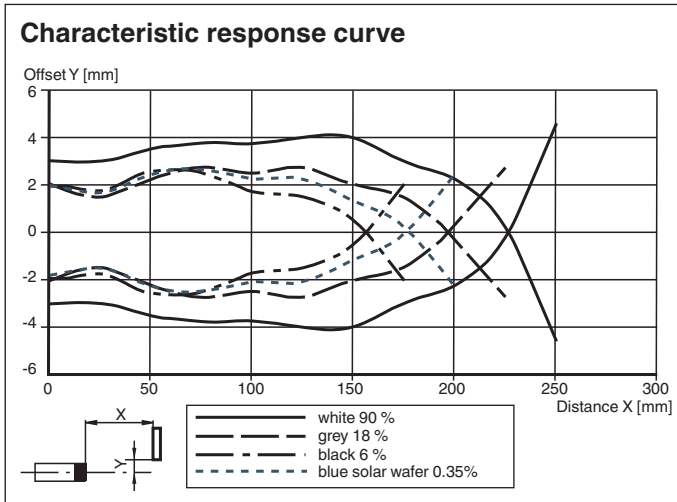







Accessories

| | | |
|--|---------------------|---|
| | OMH-ML100-09 | Mounting aid for round steel \varnothing 12 mm or sheet 1.5 mm ... 3 mm |
| | OMH-ML100-03 | Mounting aid for round steel \varnothing 12 mm or sheet 1.5 mm ... 3 mm |
| | OMH-ML100-04 | Mounting aid for ML100 series, mounting bracket |

Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 70114686_eng.pdf

Accessories

| | | |
|---|----------------------|--|
|  | OMH-ML100-05 | Mounting aid for ML100 series, mounting bracket |
|  | OMH-F10-ML100 | Mounting aid for ML100 series |
|  | OMH-10 | Mounting aid for ML100 series |
|  | V31-GM-2M-PUR | Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable grey |
|  | V31-WM-2M-PUR | Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey |
|  | OMH-ML100-S1 | Mounting bracket |