


# Connection cable

## V94-G-YE0,6M-STOOW-V94-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 4-pin

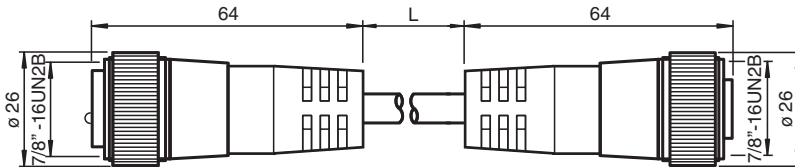

### Technical Data

#### General specifications

Number of pins	4
Connection 1	socket
Construction type 1	straight
Threading 1	7/8 inch
Connection 2	plug
Construction type 2	straight
Threading 2	7/8 inch

#### Electrical specifications

Operating voltage	$U_B$	max. 600 V
Operating current	$I_B$	10 A
Volume resistance		< 5 m $\Omega$

#### Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

#### Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------

#### Mechanical specifications

Degree of protection	IP67
Material	
Contacts	Cu alloy gold plated
Body	PVC, yellow
Cable	PVC
Slotted nut	nickel-plated brass
Core insulation	PVC
Cable	fine-strand, flexible

Release date: 2020-12-11 Date of issue: 2020-12-11 Filename: 70119783\_eng.pdf

## Technical Data

Sheath diameter		Ø 9.9 mm
Bending radius		10 x cable diameter
Color		yellow
Cores		4 x 1.5 mm <sup>2</sup> (16 AWG)
Length	L	0.6 m
Note		STOOW UL Standard

## Connection

