

# Connection cable


## V95-G-YE1M-STOOW-V95-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 5-pin



### Dimensions

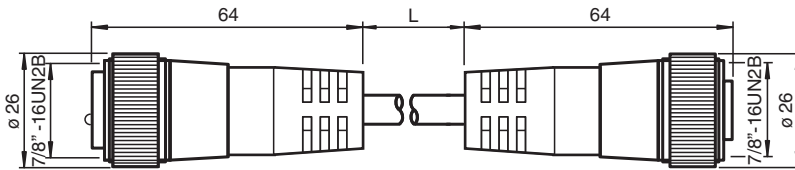

### Technical Data

#### General specifications

Number of pins	5
Connection 1	socket
Construction type 1	straight
Threading 1	7/8 inch
Connection 2	plug
Construction type 2	straight
Threading 2	7/8 inch

#### Electrical specifications

Operating voltage	$U_B$	max. 600 V
Test voltage		1500 V
Operating current	$I_B$	8 A
Volume resistance		< 5 m $\Omega$

#### Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

#### Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------

#### Mechanical specifications


Degree of protection	IP67
Material	
Contacts	Cu alloy gold plated
Body	PVC, yellow
Cable	PVC

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119794\_eng.pdf

**Technical Data**

Slotted nut	nickel-plated brass	
Core insulation		PVC
Cable	fine-strand, flexible	
Sheath diameter		Ø 9.9 mm
Bending radius	10 x cable diameter	
Color	yellow	
Cores	5 x 1.5 mm <sup>2</sup> (16 AWG)	
Length	L	1 m
Note	STOOW UL Standard	

**Connection**



- 1 ) ..... WH
- 2 ) ..... RD
- 3 ) ..... GN/YE
- 4 ) ..... OR
- 5 ) ..... BK

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119794\_eng.pdf