

# Connection cable


## V95-G-YE2M-STOOW-V95-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 5-pin



### Dimensions

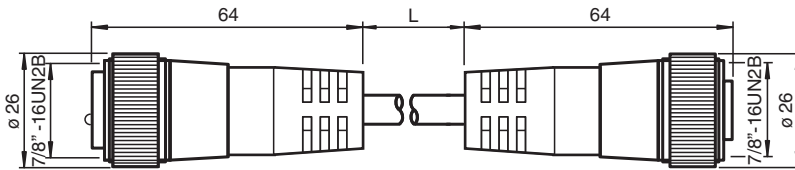

### Technical Data

#### General specifications

Number of pins	5
Connection 1	socket
Construction type 1	straight
Threading 1	7/8 inch
Connection 2	plug
Construction type 2	straight
Threading 2	7/8 inch

#### Electrical specifications

Operating voltage	$U_B$	max. 600 V
Test voltage		1500 V
Operating current	$I_B$	8 A
Volume resistance		< 5 m $\Omega$

#### Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

#### Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------

#### Mechanical specifications


Degree of protection	IP67
Material	
Contacts	Cu alloy gold plated
Body	PVC, yellow
Cable	PVC

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119795\_eng.pdf

## Technical Data

Slotted nut		nickel-plated brass
Core insulation		PVC
Cable		fine-strand, flexible
Sheath diameter		Ø 9.9 mm
Bending radius		10 x cable diameter
Color		yellow
Cores		5 x 1.5 mm <sup>2</sup> (16 AWG)
Length	L	2 m
Note		STOOW UL Standard

## Connection



1	⌋	.....	WH
2	⌋	.....	RD
3	⌋	.....	GN/YE
4	⌋	.....	OR
5	⌋	.....	BK